

Data Sheet

Customer:

Product: Automotive Grade Chip Resistor – CRS..A Series

Size: 0201/0402/0603/0805/1206/1210/2010/2512

Issued Date: 19-May-25

Edition: REV.A2



VIKING TECH CORPORATION
光頡科技股份有限公司

No.70 Guangfu N. Rd., Hukou
Township, Hsinchu County 303,
Taiwan

TEL:886-3-5972931

FAX:886-3-5972935•886-3-5973494

E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頡科技股份有限公司高雄分公司

No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999

FAX:886-7-8228229

E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頡電子(無錫)有限公司

No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028

TEL:86-510-85203339

FAX:86-510-85203667•86-510-85203977

E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
19-May-25	19-May-25	19-May-25	19-May-25	
Mandy Chang	Ben Chang	Ben Chang		

Automotive Grade Chip Resistor-CRS..A Series




Features

- AEC-Q200 Compliance
- Compliant with RoHS directive
- Halogen free requirement



Applications

- Automotive
- Audio-visual
- Integrated systems

Construction

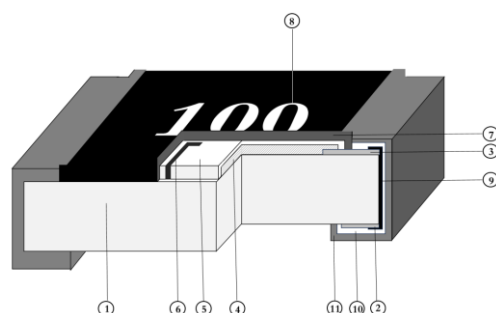

1	Ceramic substrate	5	1st Protective coating	9	Terminal inner electrode
2	Bottom inner electrode	6	Laser Trimmed	10	Ni plating
3	Top inner electrode	7	2nd Protective coating	11	Sn plating
4	Resistive layer	8	Marking		



Dimensions

Type	Size (Inch)	L (mm)	W (mm)	H (mm)	L1 (mm)	L2 (mm)
CRS01	0201	0.60±0.03	0.30±0.03	0.23±0.03	0.10±0.05	0.15±0.05
CRS02	0402	1.00±0.10	0.50±0.05	0.30±0.05	0.20±0.10	0.25±0.10
CRS03	0603	1.60±0.10	0.80±0.10	0.45±0.10	0.30±0.15	0.25±0.15
CRS05	0805	2.00±0.10	1.25±0.10	0.50±0.10	0.35±0.20	0.35±0.20
CRS06	1206	3.05±0.10	1.55±0.10	0.50±0.10	0.45±0.20	0.40±0.20
CRS13	1210	3.05±0.10	2.60±0.15	0.55±0.10	0.45±0.20	0.50±0.20
CRS10	2010	5.00±0.10	2.50±0.15	0.55±0.10	0.45±0.20	0.50±0.20
CRS12	2512	6.35±0.10	3.10±0.15	0.55±0.10	0.60±0.20	0.50±0.20

Part Numbering

CRS	03	J	T	E		1001	A
Product Type	Dimensions (L×W)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance	Function Code
	01: 0201 02: 0402 03: 0603 05: 0805 06: 1206 13: 1210 10: 2010 12: 2512	D: ±0.5% F: ±1% J: ±5%	T: Taping Reel	E: ±100 F: ±200 H: ±400	: Standard	0100: 10Ω 1000: 100Ω 1001: 1KΩ 1004: 1MΩ	A: Automotive Grade


Standard Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. rated voltage	Max. Overload Voltage	Resistance Range		TCR (PPM/°C)
					±0.5%、±1% (E24、E96)	±5% (E24)	
CRS01 (0201)	1/20W	-55 ~ +125°C	25V	50V	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	±400
					10Ω ≤ R ≤ 10MΩ	10Ω ≤ R ≤ 10MΩ	±200
CRS02 (0402)	1/16W	-55 ~ +155°C	50V	100V	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	±400
					10Ω ≤ R < 1MΩ	-	±100
					1MΩ ≤ R ≤ 22MΩ	10Ω ≤ R ≤ 22MΩ	±200
CRS03 (0603)	1/10W	-55 ~ +155°C	75V	150V	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	±400
					10Ω ≤ R < 1MΩ	-	±100
					1MΩ ≤ R ≤ 22MΩ	10Ω ≤ R ≤ 22MΩ	±200
CRS05 (0805)	1/8W	-55 ~ +155°C	150V	300V	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	±400
					10Ω ≤ R < 1MΩ	-	±100
					1MΩ ≤ R ≤ 22MΩ	10Ω ≤ R ≤ 22MΩ	±200
CRS06 (1206)	1/4W	-55 ~ +155°C	200V	400V	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	±400
					10Ω ≤ R < 1MΩ	-	±100
					1MΩ ≤ R ≤ 22MΩ	10Ω ≤ R ≤ 22MΩ	±200
CRS13 (1210)	1/2W	-55 ~ +155°C	200V	400V	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	±400
					10Ω ≤ R < 1MΩ	-	±100
					1MΩ ≤ R ≤ 22MΩ	10Ω ≤ R ≤ 22MΩ	±200
CRS10 (2010)	3/4W	-55 ~ +155°C	200V	400V	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	±400
					10Ω ≤ R < 1MΩ	-	±100
					1MΩ ≤ R ≤ 22MΩ	10Ω ≤ R ≤ 22MΩ	±200
CRS12 (2512)	1W	-55 ~ +155°C	200V	400V	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	±400
					10Ω ≤ R < 1MΩ	-	±100
					1MΩ ≤ R ≤ 22MΩ	10Ω ≤ R ≤ 22MΩ	±200

■Jumper(0Ω)

Item Type	Rated Current	Max. Overload Current	Resistance Range	
			±1%	±5%
CRS01 (0201)	0.5A	1A	0Ω (≤40mΩ)	0Ω (≤50mΩ)
CRS02 (0402)	1A	2A	0Ω (≤30mΩ)	
CRS03 (0603)		3A		
CRS05 (0805)	2A	5A		
CRS06 (1206)				
CRS13 (1210)				
CRS10 (2010)				
CRS12 (2512)				

■Resistance Test Package Standard Measurement Location

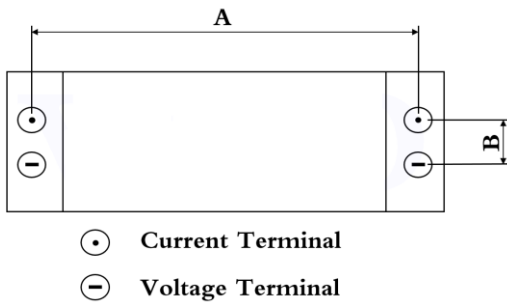

Type	A (mm)	B (mm)
CRS01	0.44±0.05	0.22±0.05
CRS02	0.80±0.05	0.24±0.05
CRS03	1.35±0.05	0.35±0.05
CRS05	1.80±0.05	0.35±0.05
CRS06	2.90±0.05	0.35±0.05
CRS13	2.90±0.05	0.35±0.05
CRS10	4.50±0.05	1.15±0.05
CRS12	5.90±0.05	1.60±0.05

■Environmental Characteristics


Item	Requirement		Test Method
	Resistors	Jumper	
TCR	As Spec	-	MIL-STD-202 Method 304 $TCR \text{ (ppm / } ^\circ\text{C)} = \frac{(R2-R1)}{R1 (T2-T1)} \times 10^6$ R1: Measured resistance at room temperature (Ω) R2: Measured resistance at -55°C or +125°C. (Ω) T1: room temperature (°C) T2: Temperatures of -55°C or +125°C (°C) ° According to MIL-STD-202 Method 304
Short Time Overload	F: $\Delta R \leq \pm(1\%R + 0.05\Omega)$ J: $\Delta R \leq \pm(2\%R + 0.05\Omega)$ No damage to appearance, no short circuits or burnouts.	F: 0201: $R \leq 40m\Omega$ 0402 and above $R \leq 30m\Omega$; J: $R \leq 50m\Omega$; No visible damage	IEC60115-1 8.1 Apply 2.5 times the rated voltage (2.5 times the rated voltage or the maximum overload voltage, whichever is less) for 5 seconds, release the load for about 30 minutes, and then measure the resistance variance. (For rated voltage, refer to Specification)

Item	Requirement		Test Method
	Resistors	Jumper	
Solderability	The tin area of the conductor should be greater than 95%. No damage to appearance.		AEC -Q200 Test 18 The resistance is immersed in a furnace of $235\pm5^{\circ}\text{C}$ for 2 seconds and then placed in a microscope. Observe the solder area under the microscope.
Resist soldering heat	Test item 1: (1).Rate of change of resistance Range of resistance: $\geq 1\Omega$ $\Delta R\%\leq\pm(1.0\%+0.05\Omega)$ (2).The appearance of the electrode is normal, and the side guide does not fall off. Test item 2 : (1).The tin area of the conductor should be greater than 95%. (2).No lower layer material (e.g., white substrate) should be seen at the edge of the electrode. Test item 3 : (1).Rate of change of resistance Range of resistance: $\geq 1\Omega$ $\Delta R\%\leq\pm(1.0\%+0.05\Omega)$ (2).The appearance of the electrode is normal, and the side guide is not detached.	Test item 1: (1).Rate of change of resistance F: 0201: $R\leq 40\text{m}\Omega$ 0402 and above $R\leq 30\text{m}\Omega$; J: $R\leq 50\text{m}\Omega$; (2).The appearance of the electrode is normal, and the side guide is not detached. Test item 2: (1).The tin area of the conductor should be greater than 95%. (2).No lower layer material (e.g., white substrate) should be seen at the edge of the electrode. Test item 3: (1).Rate of change of resistance F: 0201: $R\leq 40\text{m}\Omega$ 0402 and above $R\leq 30\text{m}\Omega$; J: $R\leq 50\text{m}\Omega$; (2).The appearance of the electrode is normal, and the side guide does not fall off.	AEC-Q200 Test 15 Test item 1 (soldering furnace test): Immerse in a tin furnace of $260\pm 5/-0^{\circ}\text{C}$ for $10\pm 1/-0$ seconds, take out and leave for more than 60 minutes, and then measure the change rate of resistance value. Test item 2 (welding furnace test): Soak in a tin furnace of $260\pm 5/-0^{\circ}\text{C}$ for $30\pm 1/-0$ seconds, then wash it out. Observe the solder area under a microscope. Test item 3 (test of soldering iron): heating temperature : $350\pm 10^{\circ}\text{C}$ Heating time of the soldering iron: $3\pm 1/-0$ sec. The chromium iron was taken from the electrode and heated at both ends, then removed and left for more than 60 minutes, and the rate of change of resistance was measured.
Hot and cold shocks	$\Delta R\%\leq\pm(2.0\%+0.05\Omega)$	F: 0201: $R\leq 80\text{m}\Omega$ 0402 and above $R\leq 60\text{m}\Omega$; J: $R\leq 100\text{m}\Omega$; No visible damage	MIL-STD-202 Method 107 The samples were placed in a high and low temperature laboratory with a temperature change from -55°C to 125°C for 30 minutes, a total of 1000 times. Then they were taken out and stabilized at room temperature for 24 hours ± 4 hours or more, and their resistance variance rate was measured.
Bending test	$\Delta R\%\leq\pm(1.0\%+0.05\Omega)$ There is no damage to the appearance, no side guide detachment and no body fracture.	F: 0201: $R\leq 40\text{m}\Omega$ 0402 and above $R\leq 30\text{m}\Omega$; J: $R\leq 50\text{m}\Omega$; No visible damage	AEC-Q200 Test 21 Test samples on the PCB by welding and place the PCB on a bending tester. Add force to the center part of the PCB for a duration of $60(\pm 5)$ seconds. Measure the resistance variance rate in the load. Bend depth (D) 0402 、0603 、0805=5 mm 0201 、1206 、1210=3 mm 2010 、2512=2 mm
End electrode tensile test	Item 1: No damage to the appearance, no side guide detachment and no body fracture occurred. Item 2: Tension is greater than or equal to 5N		AEC-Q200 Test 22 Test item 1: Solder the resistor to the circuit board, apply a force of 5N to the back of the resistor for 10 sec, and check the appearance of the side conductor. Test item 2: Solder the resistor to the circuit board, gradually apply force to the back of the resistor, and test the maximum peel strength of the end electrode.


Item	Requirement		Test Method
	Resistors	Jumper	
Resistance-to-high temperature test	F: $\Delta R \leq \pm(1\%R + 0.05\Omega)$ J: $\Delta R \leq \pm(2\%R + 0.05\Omega)$	F: 0201: $R \leq 80m\Omega$ 0402 and above $R \leq 60m\Omega$; J: $R \leq 100m\Omega$	AEC -Q200 Test 3 The specimens are placed in a chamber at a temperature of $155 \pm 3^\circ\text{C}$ for 1000 hours, then removed, stabilised at room temperature for 24 hours ± 4 hours or more, and their resistance variance measured.
Resistant to moisture load	F: $\Delta R \leq \pm(2\%R + 0.05\Omega)$ J: $\Delta R \leq \pm(3\%R + 0.05\Omega)$	F: 0201: $R \leq 80m\Omega$ 0402 and above $R \leq 60m\Omega$; J: $R \leq 100m\Omega$	AEC-Q200 Test 7 Temperature 85°C 、Humidity 85% 、10% Rated Power Current , Placement 1000 hours.
ESD	No damage to appearance $\Delta R \leq \pm(3.0\%R + 0.05\Omega)$	F: 0201: $R \leq 40m\Omega$ 0402 and above $R \leq 30m\Omega$; J: $R \leq 50m\Omega$; No visible damage	AEC-Q200 Test 17 Human body mode, two discharges, positive and negative polarity each time. 0603:1kV;0805:2kV ; 1206 and above : 3Kv
Load life	F: $\Delta R \leq \pm(2\%R + 0.05\Omega)$ J: $\Delta R \leq \pm(3\%R + 0.05\Omega)$	F: 0201: $R \leq 80m\Omega$ 0402 and above $R \leq 60m\Omega$; J: $R \leq 100m\Omega$	AEC-Q200 Test 8 $125^\circ\text{C} \pm 2^\circ\text{C}$, 1000 hours , voltage at 36% of rated power (current) value or component limit voltage (whichever is less), 1.5 hours on/0.5 hours off.
Anti-vulcanization properties	$\Delta R \leq \pm(4.0\% + 0.5\Omega)$ No visible damage	F: 0201: $R \leq 80m\Omega$ 0402 and above $R \leq 60m\Omega$; J: $R \leq 100m\Omega$; No visible damage	ASTM-B -809-95 The resistance to be measured is placed in saturated sulfur vapor, temperature: $60^\circ\text{C} \pm 3^\circ\text{C}$, humidity: $91^\circ\text{C} \sim 93\%\text{RH}$, and the placement time is 750 hours.
vibrate	$\Delta R \leq \pm(1.0\%R + 0.05\Omega)$ No visible damage	F: 0201: $R \leq 40m\Omega$ 0402 and above $R \leq 30m\Omega$; J: $R \leq 50m\Omega$; No visible damage	AEC-Q200 Test 14 Frequency: 10Hz~2000Hz, acceleration: 5g's, one cycle 20min, X, Y, Z three directions each direction 12 cycles, a total of 36 cycles.

■Storage Period: It can be stored for two years under the conditions of $-5\sim 40^\circ\text{C}$ and 20~75% of storage environment.

■Soldering Condition

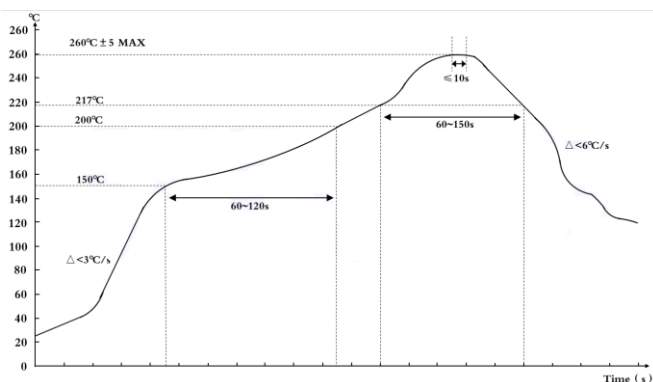


Recommended reflow soldering curve

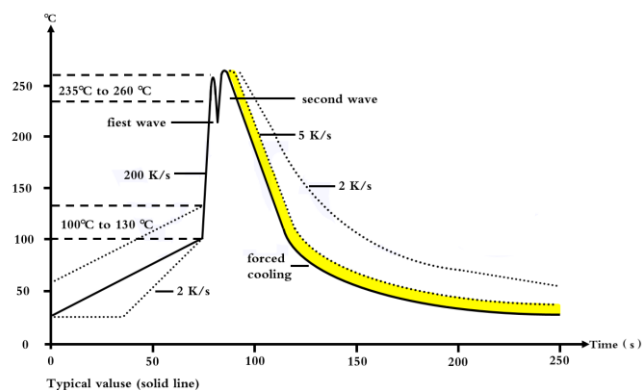

Recommended wave soldering curve



■ Packaging

Reel Specifications & Packaging Quantity

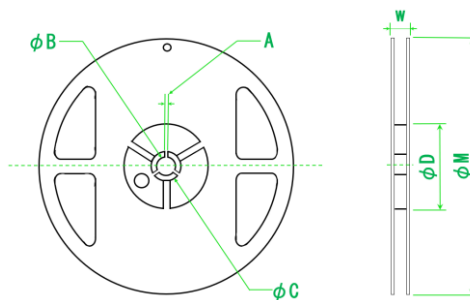


Type	Packaging Quantity		Tape Width	Reel Diameter	Wa (mm)	M (mm)	A (mm)	B (mm)	C (mm)	D (mm)
CRS01	Paper	15K	8mm	7 inch	9.0±0.5	178±0.5	2.0±0.5	13.5±0.5	21.0±0.5	60.0±1.0
CRS02	Paper	10K	8mm	7 inch	9.0±0.5	178±0.5	2.0±0.5	13.5±0.5	21.0±0.5	60.0±1.0
CRS03 CRS05 CRS06 CRS13	Paper	5K	8mm	7 inch	9.0±0.5	178±0.5	2.0±0.5	13.5±0.5	21.0±0.5	60.0±1.0
CRS10 CRS12	Embossed	4K	12mm	7 inch	13.8±0.5	178±0.5	2.0±0.5	13.5±0.5	21.0±0.5	80.0±1.0

Paper Tape Specifications

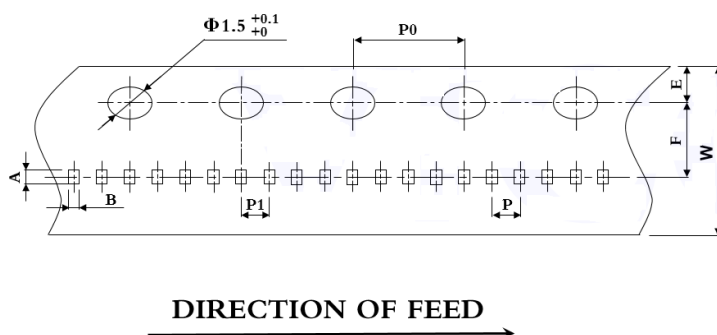


Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	T1 (mm)	T2 (mm)	P (mm)	P0 (mm)	P1 (mm)
CRS01	0.68±0.05	0.38±0.03	8.00±0.10	1.75±0.10	3.50±0.05	0.42±0.1/-0	0.28±0.02	2.00±0.05	4.00±0.05	2.00±0.05
CRS02	1.15±0.05	0.65±0.05	8.00±0.20	1.75±0.10	3.50±0.05	0.40±0.2/-0	0.40±0.05	2.00±0.10	4.00±0.05	2.00±0.05
CRS03	1.80±0.10	1.00±0.10	8.00±0.20	1.75±0.10	3.50±0.05	0.60±0.2/-0	0.60±0.10	4.00±0.10	4.00±0.05	2.00±0.05
CRS05	2.30±0.10	1.55±0.10	8.00±0.20	1.75±0.10	3.50±0.05	0.75±0.2/-0	0.75±0.10	4.00±0.10	4.00±0.05	2.00±0.05
CRS06	3.50±0.20	1.90±0.20	8.00±0.20	1.75±0.10	3.50±0.05	0.75±0.2/-0	0.75±0.10	4.00±0.10	4.00±0.05	2.00±0.05
CRS13	3.50±0.20	2.80±0.20	8.00±0.20	1.75±0.10	3.50±0.05	0.75±0.2/-0	0.75±0.10	4.00±0.10	4.00±0.05	2.00±0.05

Embossed Plastic Tape Specifications

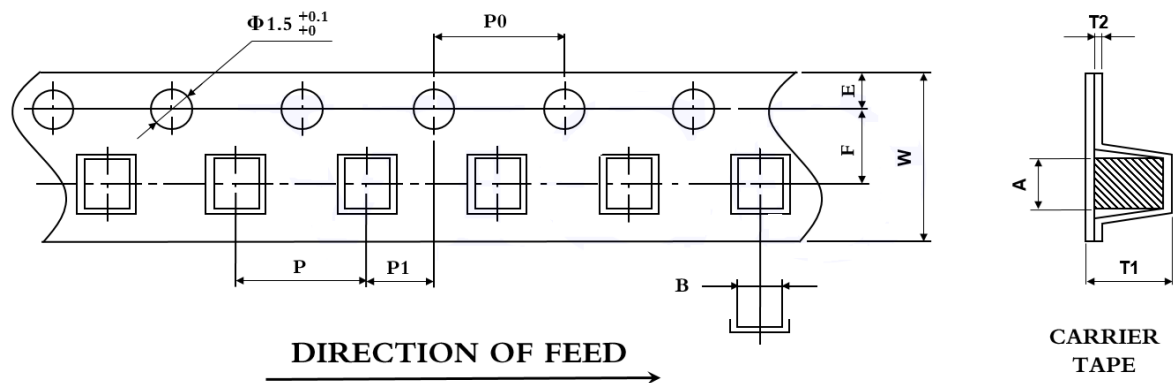


Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	T1 (mm)	T2 (mm)	P (mm)	P0 (mm)	P1 (mm)
CRS10	5.50±0.20	2.80±0.20	12.00±0.20	1.75±0.10	5.50±0.05	1.10±0.15	0.23±0.15	4.00±0.10	4.00±0.05	2.00±0.05
CRS12	6.70±0.20	3.40±0.20	12.00±0.20	1.75±0.10	5.50±0.05	1.10±0.15	0.23±0.15	4.00±0.10	4.00±0.05	2.00±0.05

Front and Rear Guide Belt Dimensions

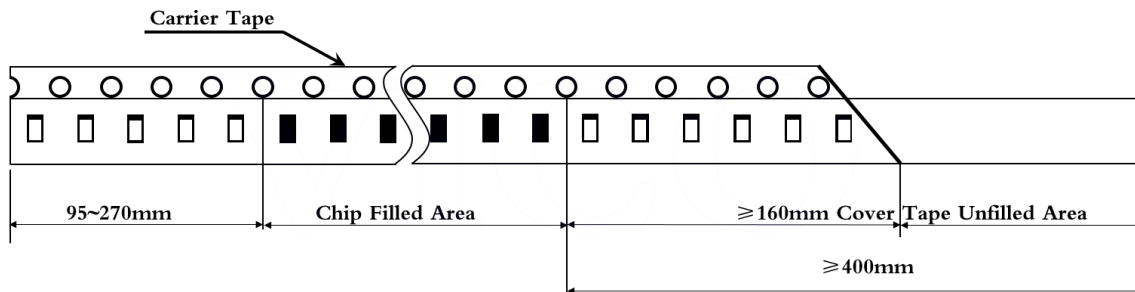

Derating Curve

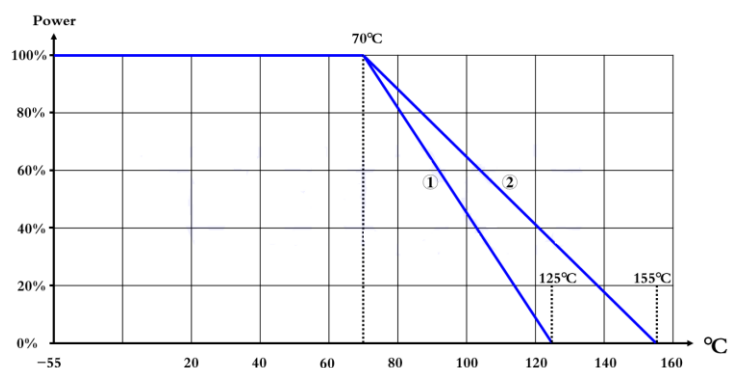

Clarification: For resistors operating at ambient temperatures above 70°C, the power rating shall be derated in accordance with the following chart.

Rated voltage or rated current:

Rated voltage: the rated power DC or AC (commercial weekly RMS.) voltage.

The following formula can be used to obtain the value, but if the obtained value exceeds the maximum voltage in the specification table, the maximum rated voltage shall be used as its rated voltage.

$$E = \sqrt{P \times R}$$

E=Rated voltage (V)
 P=Rated power (W)
 R=Nominal resistance (Ω)

■ Marking

No Marking for 0201 and 0402

Jumper for all: Letter "O"

Example: 

1% for 0805/1206/1210/2010/2512: 4 digits marking

Example:

Resistance	100Ω	2.2KΩ	10KΩ	49.9KΩ	100KΩ
Marking	1000	2201	1002	4992	1003


5% for 0603/0805/1206/1210/2010/2512: 3 digits marking in E24

Example: 101=100Ω 102=1KΩ (1st and 2nd are E24 code and 3rd code is multiplier)


E24 code	10	11	12	13	15	16	18	20	22	24	27	30	33	36	39	43	47	51	56	62	68	75	82	91
----------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

1% for 0603(E24): 3 digits marking in E24

Example: one short bar under marking letter



1% for 0603(E96): 3 digits marking in E96



3 digits marking for Example: 14C=13K7Ω 13C=13K3Ω

68B=4K99Ω 68X=49.9Ω

The decimal point should be expressed by "R"

Example: 

Marking Table

Code	E96		Code	E96		Code	E96		Code	E96	
01	100		25	178		49	316		73	562	
02	102		26	182		50	324		74	576	
03	105		27	187		51	332		75	590	
04	107		28	191		52	340		76	604	
05	110		29	196		53	348		77	619	
06	113		30	200		54	357		78	634	
07	115		31	205		55	365		79	649	
08	118		32	210		56	374		80	665	
09	121		33	215		57	383		81	681	
10	124		34	221		58	392		82	698	
11	127		35	226		59	402		83	715	
12	130		36	232		60	412		84	732	
13	133		37	237		61	422		85	750	
14	137		38	243		62	432		86	768	
15	140		39	249		63	442		87	787	
16	143		40	255		64	453		88	806	
17	147		41	261		65	464		89	825	
18	150		42	267		66	475		90	845	
19	154		43	274		67	487		91	866	
20	158		44	280		68	499		92	887	
21	162		45	287		69	511		93	909	
22	165		46	294		70	523		94	931	
23	169		47	301		71	536		95	953	
24	174		48	309		72	549		96	976	
Code	A	B	C	D	E	F	G	X	Y		
Multiplier	10 ⁰	10 ¹	10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁻¹	10 ⁻²		

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version A1	Apr 02,2025		-Modify the description of Features and Applications -Modify the content of Construction -Modify all size specifications of Dimensions -Add Resistance Tolerance D $\pm 0.5\%$ -Modify the specifications of Standard Electrical Specifications -Remove the High Power Rating Electrical Specifications and Recommend land pattern -Add Resistance Test Package Standard Measurement Location -Modify the Environmental Characteristics -Modify the Soldering Condition -Modify the packaging specifications -Modify the Derating Curve
Version A2	May 19,2025		-Modify TCR for full-size $10\Omega \leq R < 1M\Omega$ from ± 200 to ± 100. -Add specifications for full-size jumper resistor. -Add Environmental Characteristics items for jumper resistors.