

Data Sheet

Customer:

Product: Carbon Film Resistor — CFS Series

Sizes.: 0204/0207/0309

Issued Date: 31-Mar-25

Edition: REV.A6



VIKING TECH CORPORATION
光頤科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
31-Mar-25	31-Mar-25	31-Mar-25	31-Mar-25	
Mandy Chang	Ben Chang	Ben Chang		

Carbon Film Resistor




Features

- SMD style carbon resistor
- Free direction for mounting due to cylindrical design
- High solder ability due to specially plated electrodes
- Electrodes strength is higher than flat chip resistors
- Lower current noise than thick film flat chip resistors
- Suitable for reflow, flow and iron soldering

Applications

- Telecommunication
- Medical Equipment
- Consumer Product

Construction

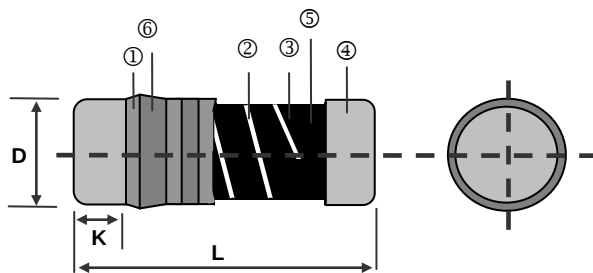


① Insulation Coating	④ Electrode Cap
② Trimming Line	⑤ Resistor Layer
③ Ceramic Rod	⑥ Marking

Dimensions

Unit: mm

Type	L	ΦD	K min.	Wight (g) (1000pcs)	Packaging	
					180mm/7"	330mm/13"
CFS0204	3.50±0.2	1.40±0.15	0.5	19	3000EA	—
CFS0207	5.90±0.2	2.20±0.20	0.5	81	2000EA	—
CFS0309	8.50±0.2	3.20±0.20	0.5	95	—	2500EA

Derating Curve

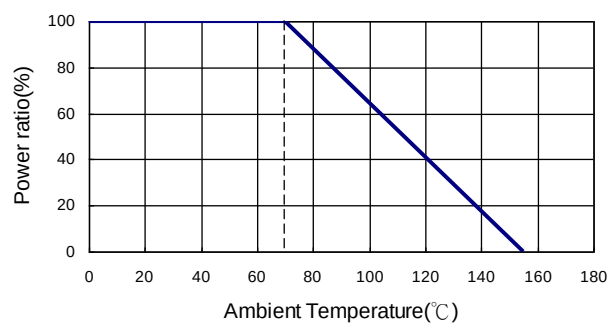

Part Numbering

CFS	0204	G	T	-	V	1000
Product Type	Dimensions (L×ΦD)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance
	0204: 3.5x1.4 0207: 5.9x2.2 0309: 8.5x3.2	G: ±2% J: ±5%	T: Taping Reel B: Bulk	-: No specified	S: 2W T: 1W U: 1/2W V: 1/4W	0010: 1Ω 1R20: 1.2Ω 1000: 100Ω 2201: 2200Ω 1001: 1KΩ 1004: 1MΩ

Standard Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range	
					±2%	±5%
0204	1/4W	-55 ~ +155°C	200V	400V	1Ω - 1MΩ	
0207	1/2W		300V	600V	1Ω - 1MΩ	
0309	1W		350V	700V	1Ω - 1MΩ	

High Power Rating Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range	
					±2%	±5%
0207	1W	-55 ~ +155°C	350V	700V	1Ω - 1MΩ	
0309	2W		350V	700V	1Ω - 1MΩ	

Operating Voltage=√(P*R) or Max. operating voltage listed above, whichever is lower.

Overload Voltage=2.5*√(P*R) or Max. overload voltage listed above, whichever is lower.

Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	1Ω - 100KΩ: ±350ppm 101KΩ - 500KΩ: ±700ppm 501KΩ - 1MΩ: ±1000ppm	JIS-C-5201-1 4.8 -55°C~+125°C, 25°C is the reference temperature
Short Time Overload	±(0.5%+0.05Ω)	JIS-C-5201-1 5.5 RCWV*2.5 or Max. overload voltage whichever is lower for 5 seconds
Endurance	±(3%+0.05Ω)	JIS-C-5201-1 7.10 Standard: 70±2°C, for 24 hrs High Power: 70±2°C, for 1000 hrs with DC 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	±(5%+0.05Ω)	JIS-C-5201-1 7.9 Standard: Room temperature + 100°C, 90%~95% RH, Dipping time: 0.5hr High Power: 40±2°C, 90~95% R.H., for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	95% min. coverage	JIS-C-5201-1 6.5 235±5°C for 3 seconds
Resistance to Soldering Heat	±(1%+0.05Ω)	JIS-C-5201-1 6.4 260±5°C for 10 seconds
Resistance to Solvent	Epoxy Insulation coating can not be peeled	There are 3 cycles, each circle takes 1 min

RCWV(Rated continuous working voltage)= √(P*R) or Max. Operating voltage whichever is lower

■ **Storage Temperature: 15~28°C; Humidity < 80%RH**

■ **Shelf life: 1 years Max**

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version A6	Mar 31,2025		-Add Shelf life.