

Data Sheet

Customer:

Product: Automotive Grade Multilayer Chip Inductor – CL-SA Series

Sizes.: 0201/0402/0603

Issued Date: 14-Apr-25

Edition: REV.A3



VIKING TECH CORPORATION
光韻科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光韻科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光韻電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
14-Apr-25	14-Apr-25	14-Apr-25	14-Apr-25	
Mandy Chang	Ben Chang	Ben Chang		

Automotive Grade Multilayer Chip Inductor




■ Features

- Particular ceramic material and coil structure provide high frequency application range up to 10GHz
- Small size and low profile
- Available in various sizes
- Excellent solderability and heat resistance
- AEC-Q200 Compliance

■ Applications

- RF and Wireless Communication
- Information Technology Equipment Which Includes Computer
- Telecommunications, Rated Detectors, Automotive Electronics, Cellular Phones
- Pagers, Audio Equipment, PDAs, Keyless Remote System and Low-voltage Power Supply Modules.

■ Construction



①	Ceramic Material	③	Pull Out Electrode
②	Internal Electrode	④	End-termination

■ Dimensions

Unit: mm

Type	Size (Inch)	L	W	T	a
CL01-SA	0201	0.60±0.03	0.30±0.03	0.30±0.03	0.10~0.20
CL02-SA	0402	1.00±0.10	0.50±0.10	0.50±0.10	0.10~0.30
CL03-SA	0603	1.60±0.15	0.80±0.15	0.80±0.15	0.20~0.60

■ Part Numbering

CL	02	J	T		1N0	-S	A
Product Type	Dimensions	Inductance Tolerance	Packaging Code	Appearance	Inductance	Special	Function Code
	01: 0201 02: 0402 03: 0603	B: ±0.1nH C: ±0.2nH S: ±0.3nH G: ±2% H: ±3% J: ±5%	T: Taping Reel	: Standard Q: High Q	0N3: 0.3nH 1N0: 1.0nH 10N: 10nH R10: 100nH		A: Automotive Grade

■Standard Electrical Specifications

CL01-SA Multilayer Chip Inductors / Standard Type

Inductance (nH)	Tolerance	Quality Factor /min.	L/Q Freq. (MHz)	SRF min. (GHz)	RDC (Ω) max.	IDC (mA) max.
0.3	±0.1nH	4	100	10.00	0.07	850
0.4	±0.1nH	4	100	10.00	0.07	850
0.5	±0.1nH	4	100	10.00	0.08	800
0.6	±0.1nH	4	100	10.00	0.08	800
0.7	±0.1nH	4	100	10.00	0.09	750
0.8	±0.1nH	4	100	10.00	0.10	750
0.9	±0.1nH	4	100	10.00	0.10	750
1.0	±0.1, 0.2, 0.3nH	4	100	10.00	0.14	600
1.1	±0.1, 0.2, 0.3nH	4	100	10.00	0.14	600
1.2	±0.1, 0.2, 0.3nH	4	100	10.00	0.14	600
1.3	±0.1, 0.2, 0.3nH	4	100	10.00	0.14	600
1.4	±0.1, 0.2, 0.3nH	4	100	10.00	0.18	550
1.5	±0.1, 0.2, 0.3nH	4	100	10.00	0.18	550
1.6	±0.1, 0.2, 0.3nH	4	100	10.00	0.18	500
1.7	±0.1, 0.2, 0.3nH	4	100	10.00	0.19	500
1.8	±0.1, 0.2, 0.3nH	4	100	10.00	0.19	500
1.9	±0.1, 0.2, 0.3nH	4	100	10.00	0.20	450
2.0	±0.1, 0.2, 0.3nH	4	100	10.00	0.20	450
2.1	±0.1, 0.2, 0.3nH	4	100	10.00	0.20	450
2.2	±0.1, 0.2, 0.3nH	4	100	10.00	0.22	450
2.3	±0.1, 0.2, 0.3nH	4	100	10.00	0.22	450
2.4	±0.1, 0.2, 0.3nH	4	100	10.00	0.24	450
2.5	±0.1, 0.2, 0.3nH	4	100	10.00	0.24	450
2.6	±0.1, 0.2, 0.3nH	4	100	10.00	0.25	450
2.7	±0.1, 0.2, 0.3nH	5	100	10.00	0.25	450
2.9	±0.1, 0.2, 0.3nH	5	100	9.50	0.28	450
3.0	±0.1, 0.2, 0.3nH	5	100	9.50	0.28	450
3.1	±0.1, 0.2, 0.3nH	5	100	9.50	0.28	450
3.2	±0.1, 0.2, 0.3nH	5	100	9.50	0.30	450
3.3	±0.1, 0.2, 0.3nH	5	100	9.50	0.30	450
3.4	±0.1, 0.2, 0.3nH	5	100	8.00	0.30	400
3.5	±0.1, 0.2, 0.3nH	5	100	8.00	0.30	400
3.6	±0.1, 0.2, 0.3nH	5	100	8.00	0.30	400
3.7	±0.1, 0.2, 0.3nH	5	100	8.00	0.30	400
3.8	±0.1, 0.2, 0.3nH	5	100	6.50	0.30	400
3.9	±0.1, 0.2, 0.3nH	5	100	6.50	0.30	400
4.3	±0.1, 0.2, 0.3nH	5	100	6.50	0.40	350
4.7	±0.1, 0.2, 0.3nH	5	100	6.50	0.40	350
5.1	±0.1, 0.2, 0.3nH	5	100	6.50	0.40	350
5.6	±0.1, 0.2, 0.3nH	5	100	6.00	0.40	350
6.2	±0.1, 0.2, 0.3nH	5	100	6.00	0.44	300
6.8	±3, 5%	5	100	5.40	0.50	300
7.5	±3, 5%	5	100	4.80	0.53	300
8.2	±3, 5%	5	100	4.80	0.55	250
9.1	±3, 5%	5	100	4.50	0.62	250
10	±3, 5%	5	100	4.50	0.65	250
12	±3, 5%	5	100	3.70	0.70	250
15	±3, 5%	5	100	2.20	0.80	250
18	±3, 5%	5	100	2.20	0.90	200

■Operating temperature range: -55~+125℃

■ Standard Electrical Specifications

CL02-SA Multilayer Chip Inductors / Standard Type

Inductance (nH)	Tolerance	Quality Factor /min.	L/Q Freq. (MHz)	SRF min. (GHz)	RDC (Ω) max.	IDC (mA) max.
0.3	±0.1nH	8	100	10.00	0.08	1000
0.4	±0.1nH	8	100	10.00	0.08	1000
0.5	±0.1nH	8	100	10.00	0.08	1000
0.6	±0.1nH	8	100	10.00	0.08	1000
0.7	±0.1nH	8	100	10.00	0.08	1000
0.8	±0.1nH	8	100	10.00	0.08	1000
1.0	±0.1, 0.2, 0.3nH	8	100	10.00	0.08	1000
1.1	±0.1, 0.2, 0.3nH	8	100	10.00	0.08	1000
1.2	±0.1, 0.2, 0.3nH	8	100	10.00	0.09	1000
1.3	±0.1, 0.2, 0.3nH	8	100	10.00	0.09	1000
1.5	±0.1, 0.2, 0.3nH	8	100	10.00	0.10	1000
1.6	±0.1, 0.2, 0.3nH	8	100	10.00	0.10	1000
1.8	±0.1, 0.2, 0.3nH	8	100	10.00	0.12	900
2.0	±0.1, 0.2, 0.3nH	8	100	10.00	0.12	900
2.2	±0.1, 0.2, 0.3nH	8	100	10.00	0.13	900
2.4	±0.1, 0.2, 0.3nH	8	100	10.00	0.13	800
2.7	±0.1, 0.2, 0.3nH	8	100	6.00	0.16	800
3.0	±0.1, 0.2, 0.3nH	8	100	6.00	0.16	800
3.3	±0.1, 0.2, 0.3nH	8	100	6.00	0.16	800
3.6	±0.1, 0.2, 0.3nH	8	100	6.00	0.20	700
3.9	±0.1, 0.2, 0.3nH	8	100	6.00	0.20	700
4.3	±0.1, 0.2, 0.3nH	8	100	6.00	0.20	700
4.7	±0.1, 0.2, 0.3nH	8	100	6.00	0.20	700
5.1	±0.1, 0.2, 0.3nH	8	100	5.30	0.23	600
5.6	±0.1, 0.2, 0.3nH	8	100	4.50	0.23	600
6.2	±0.1, 0.2, 0.3nH	8	100	4.50	0.25	600
6.8	±2, 3, 5%	8	100	4.50	0.25	600
7.5	±2, 3, 5%	8	100	4.20	0.28	500
8.2	±2, 3, 5%	8	100	3.70	0.28	500
9.1	±2, 3, 5%	8	100	3.40	0.30	500
10	±2, 3, 5%	8	100	3.40	0.30	500
12	±2, 3, 5%	8	100	3.00	0.45	400
15	±2, 3, 5%	8	100	2.50	0.55	400
18	±2, 3, 5%	8	100	2.20	0.65	300
22	±2, 3, 5%	8	100	1.90	0.70	300
27	±2, 3, 5%	8	100	1.70	0.80	300
33	±2, 3, 5%	8	100	1.60	0.90	200
39	±2, 3, 5%	8	100	1.20	1.00	200
47	±2, 3, 5%	8	100	1.10	1.10	200
56	±2, 3, 5%	8	100	1.00	1.10	200
68	±2, 3, 5%	8	100	0.80	1.20	200
82	±5%	8	100	0.60	1.30	200
100	±5%	8	100	0.60	1.60	200

■ Operating temperature range: -55~+125℃

■ Standard Electrical Specifications

CL03-SA Multilayer Chip Inductors / Standard Type

Inductance (nH)	Tolerance	Quality Factor /min.	L/Q Freq. (MHz)	SRF min. (GHz)	RDC (Ω) max.	IDC (mA) max.
1.0	±0.3nH	8	100	10.00	0.05	1000
1.2	±0.3nH	8	100	10.00	0.05	1000
1.5	±0.3nH	8	100	10.00	0.10	1000
1.8	±0.3nH	8	100	10.00	0.10	1000
2.2	±0.3nH	8	100	8.00	0.10	1000
2.7	±0.3nH	10	100	7.00	0.13	1000
3.3	±0.3nH	10	100	6.00	0.13	1000
3.9	±0.3nH	10	100	6.00	0.15	1000
4.7	±0.3nH	10	100	5.00	0.20	1000
5.6	±0.3nH	10	100	4.00	0.23	700
6.8	±5%	10	100	4.00	0.25	700
8.2	±5%	10	100	3.50	0.28	600
10	±5%	12	100	3.40	0.30	600
12	±5%	12	100	2.60	0.35	600
15	±5%	12	100	2.30	0.40	600
18	±5%	12	100	2.00	0.45	600
22	±5%	12	100	1.60	0.50	600
27	±5%	12	100	1.40	0.55	600
33	±5%	12	100	1.20	0.60	600
39	±5%	12	100	1.10	0.65	500
47	±5%	12	100	0.90	0.70	500
56	±5%	12	100	0.90	0.75	500
68	±5%	12	100	0.70	0.85	400
82	±5%	12	100	0.60	0.95	300
100	±5%	12	100	0.60	1.00	300
120	±5%	8	50	0.50	1.20	300

■ Operating temperature range: -55~+125℃

High Q Electrical Specifications

CL01-SA Multilayer Chip Inductors / High Q Type

Inductance (nH)	Tolerance	Quality Factor /min.	L/Q Freq. (MHz)	SRF min. (GHz)	RDC (Ω) max.	IDC (mA) max.
0.3	±0.1, 0.2nH	11	100	18.00	0.07	850
0.4	±0.1, 0.2nH	11	100	18.00	0.07	850
0.5	±0.1, 0.2nH	11	100	18.00	0.08	850
0.6	±0.1, 0.2nH	11	100	18.00	0.08	850
0.7	±0.1, 0.2nH	12	100	18.00	0.09	750
0.8	±0.1, 0.2nH	12	100	18.00	0.10	750
0.9	±0.1, 0.2nH	12	100	18.00	0.12	700
1.0	±0.1, 0.2nH	12	100	17.00	0.14	600
1.1	±0.1, 0.2nH	12	100	17.00	0.14	600
1.2	±0.1, 0.2nH	12	100	15.00	0.14	600
1.3	±0.1, 0.2nH	12	100	15.00	0.15	600
1.4	±0.1, 0.2nH	12	100	14.00	0.15	600
1.5	±0.1, 0.2nH	12	100	13.50	0.15	600
1.6	±0.1, 0.2nH	12	100	13.00	0.15	600
1.7	±0.1, 0.2nH	12	100	12.50	0.19	500
1.8	±0.1, 0.2nH	12	100	12.50	0.20	500
1.9	±0.1, 0.2nH	12	100	12.50	0.20	450
2.0	±0.1, 0.2nH	12	100	12.50	0.20	450
2.1	±0.1, 0.2nH	12	100	12.00	0.22	450
2.2	±0.1, 0.2nH	12	100	12.00	0.22	450
2.3	±0.1, 0.2nH	12	100	11.50	0.24	450
2.4	±0.1, 0.2nH	12	100	11.00	0.25	450
2.5	±0.1, 0.2nH	12	100	11.00	0.25	450
2.6	±0.1, 0.2nH	12	100	11.00	0.25	450
2.7	±0.1, 0.2nH	12	100	11.00	0.25	450
2.8	±0.1, 0.2nH	12	100	9.50	0.25	450
2.9	±0.1, 0.2nH	12	100	9.50	0.25	450
3.0	±0.1, 0.2nH	12	100	9.50	0.25	450
3.1	±0.1, 0.2nH	12	100	9.50	0.30	450
3.2	±0.1, 0.2nH	12	100	9.50	0.30	450
3.3	±0.1, 0.2nH	12	100	9.50	0.30	400
3.4	±0.1, 0.2nH	12	100	8.00	0.30	400
3.5	±0.1, 0.2nH	12	100	8.00	0.30	400
3.6	±0.1, 0.2nH	12	100	8.00	0.30	400
3.7	±0.1, 0.2nH	12	100	7.00	0.30	400
3.8	±0.1, 0.2nH	12	100	7.00	0.35	350
3.9	±0.1, 0.2nH	12	100	6.50	0.35	350
4.3	±3, 5%	12	100	6.50	0.40	350
4.7	±3, 5%	12	100	6.50	0.40	350
5.1	±3, 5%	12	100	6.50	0.40	350
5.6	±3, 5%	12	100	6.00	0.44	300
6.2	±3, 5%	12	100	6.00	0.50	300
6.8	±3, 5%	12	100	5.40	0.53	300
7.5	±3, 5%	12	100	4.80	0.55	250
8.2	±3, 5%	12	100	4.80	0.62	250
9.1	±3, 5%	12	100	4.50	0.65	250
10	±3, 5%	11	100	4.00	0.70	250
12	±3, 5%	11	100	3.70	0.75	250
15	±3, 5%	11	100	3.10	0.85	250
18	±3, 5%	11	100	2.80	1.00	200

Operating temperature range: -55~+125°C


■Environmental Characteristics

Item	Requirement	Test Condition												
High Temperature Expose (Storage)	Appearance: No damage Inductance: Within $\pm 10\%$ of initial value Q: Within $\pm 20\%$ of initial value	at $+125\pm 5^{\circ}\text{C}$ for 1000 hrs Measurement at 24 ± 4 hrs after test conclusion												
Temperature Cycle	Appearance: No damage Inductance: Within $\pm 10\%$ of initial value Q: Within $\pm 20\%$ of initial value	-55°C to $+125^{\circ}\text{C}$, 1000 cycles Dwell time: 30 min Transition time ≤ 1 min												
Biased Humidity	Appearance: No damage Inductance: Within $\pm 10\%$ of initial value Q: Within $\pm 20\%$ of initial value	1000 hrs $85\pm 2^{\circ}\text{C}/85\%\text{RH}$, full rated current Measurement at 24 ± 4 hrs after test conclusion												
Operational Life	Appearance: No damage Inductance: Within $\pm 10\%$ of initial value Q: Within $\pm 20\%$ of initial value	1000 hrs @ $125\pm 5^{\circ}\text{C}$, full rated current Measurement at 24 ± 4 hrs after test conclusion												
Mechanical Shock	Appearance: No damage Inductance: Within $\pm 10\%$ of initial value Q: Within $\pm 20\%$ of initial value	Condition F: 1500g's / 0.5ms / Half sine												
Vibration Test	Appearance: No damage Inductance: Within $\pm 10\%$ of initial value Q: Within $\pm 20\%$ of initial value	5g's for 20min, 12cycles each of 3 orientations Test form 10-2000Hz., 12cycles each of 3 orientations												
Solderability	More than 95% of terminal electrode should be Covered with new solder Appearance: No damage	$235\pm 5^{\circ}\text{C}$ for 5 ± 1 seconds												
Resistance to Soldering Heat	More than 95% of terminal electrode should be Covered with new solder Appearance: No damage Inductance: Within $\pm 10\%$ of initial value Q: Within $\pm 20\%$ of initial value	$265\pm 5^{\circ}\text{C}$ for 10 ± 1 seconds												
Board Flex	Appearance: No damage	Epoxy-PCB(1.6mm) Deflection 2mm(min) 60s minimum holding time												
Terminal Strength	Appearance: No damage	<table border="1"> <thead> <tr> <th>Size</th><th>Apply Force(F)</th><th>Test Time</th></tr> </thead> <tbody> <tr> <td>0201</td><td>2N</td><td>10 ± 1 sec</td></tr> <tr> <td>0402</td><td>5N</td><td>10 ± 1 sec</td></tr> <tr> <td>0603</td><td>10N</td><td>10 ± 1 sec</td></tr> </tbody> </table>	Size	Apply Force(F)	Test Time	0201	2N	10 ± 1 sec	0402	5N	10 ± 1 sec	0603	10N	10 ± 1 sec
Size	Apply Force(F)	Test Time												
0201	2N	10 ± 1 sec												
0402	5N	10 ± 1 sec												
0603	10N	10 ± 1 sec												
ESD	Appearance: No damage Inductance: Within $\pm 10\%$ of initial value Q: Within $\pm 20\%$ of initial value	Classification levels 1C												

■Storage Temperature: Less than 40°C and 70% RH


■Shelf life: 1 years Max

■Reflow Soldering Profile

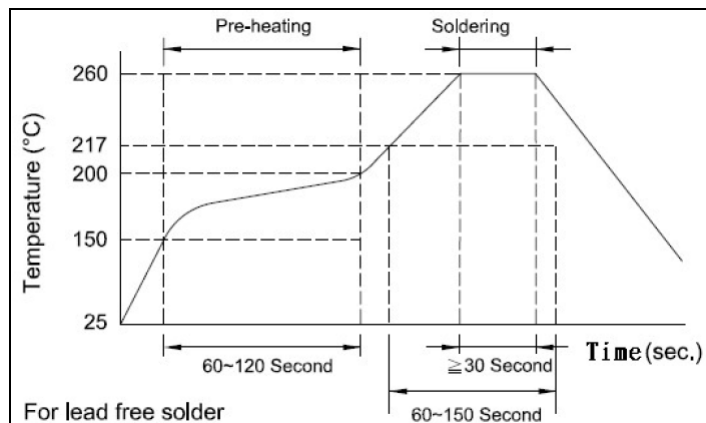

Packaging Specifications


Reel Dimension

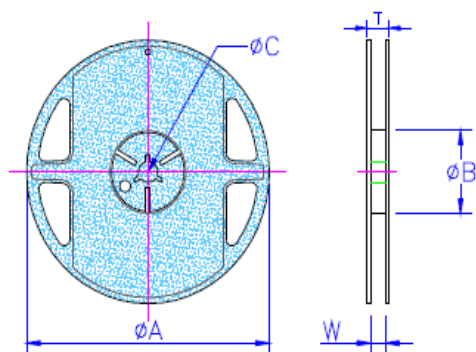

Unit: mm

Type	A	B	C	W	T	Quantity (EA)
CL01-SA	178 $\pm$ 1	60.0 $\pm$ 0.5	13.0 $\pm$ 0.20	9.00 $\pm$ 0.5	12.0 $\pm$ 0.15	15,000
CL02-SA	178 $\pm$ 1	60.0 $\pm$ 0.5	13.0 $\pm$ 0.20	9.00 $\pm$ 0.5	12.0 $\pm$ 0.15	10,000
CL03-SA	178 $\pm$ 2	50 or more	13.2 $\pm$ 1.00	10.00 $\pm$ 1.5	-	4,000

Tape Specifications

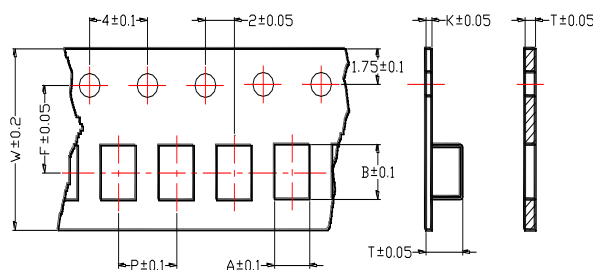


Unit: mm

Type	A	B	T	W	P	F	K	Tape
CL01-SA	0.36	0.66	0.42	8	2	3.5	-	B
CL02-SA	0.60	1.12	0.60	8	2	3.5	-	B
CL03-SA	0.98	1.80	0.95	8	4	3.5	-	B

Type A Type B

Recommend Land Pattern

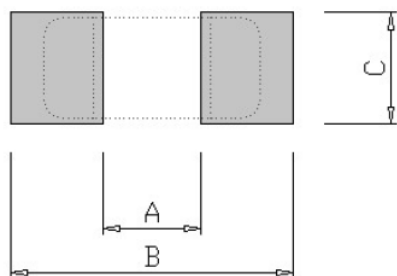

Unit: mm

Type	A	B	C
CL01-SA	0.20-0.30	0.80-0.90	0.20-0.30
CL02-SA	0.40	1.40-1.50	0.50-0.60
CL03-SA	0.70	1.90-2.30	0.60-0.80

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version A3	Apr 14,2025		-Modify Storage conditions.