

Data Sheet

Customer:

Product: Chip Common Mode Choke–CM series

Sizes.: 0805/1206

Issued Date: 14-Apr-25

Edition: REV.B1



VIKING TECH CORPORATION
光韻科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光韻科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw


VIKING ELECTRONICS (WUXI) CO., LTD.
光韻電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
14-Apr-25	14-Apr-25	14-Apr-25	14-Apr-25	
<i>Mandy Chang</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

Chip Common Mode Choke

Features


- Small chip inductor with ferrite core and two line types wire wound
- Highly effective in noise suppression High common-mode impedance at noise band and low differential-mode impedance at signal band
- Low differential-mode impedance with high coupling factor. There is almost no distortion on high-speed signal.
- Operating temperature -40°C~+105°C





Applications

- EMI Radiation Noise Suppression for Any Electronic Device
- USB Line for Personal Computers and Peripheral
- IEEE 1394 Line for Personal Computers, DVC, STB
- LCD Panels. Low-Voltage Differential Signal (LVDS)


Construction




① Terminal	② Ferrite	③ Enamel-insulated Wire
------------	-----------	-------------------------

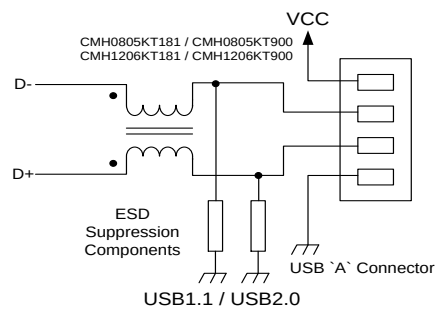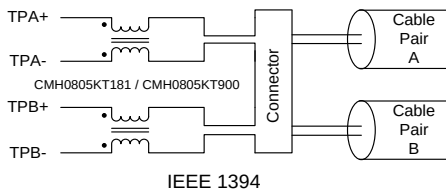

Dimensions

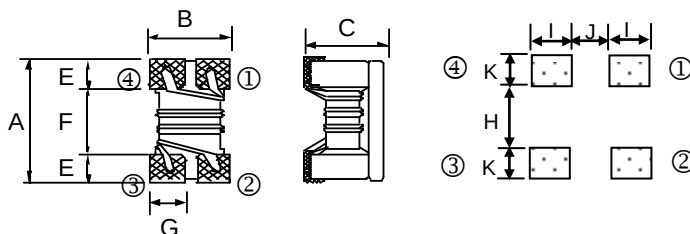

Equivalent Circuit

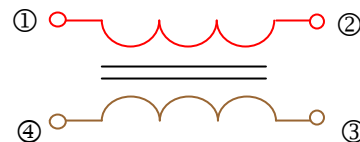

Unit : mm

Type	Size (Inch)	A	B	C	E	F	G	H	I	J	K	Weight (g) (1000pcs)
CMH05	0805	2.0±0.2	1.2±0.2	1.2±0.2	0.45	1.2	0.4	0.8	0.4	0.4	0.90	19
CMH06	1206	3.2±0.2	1.6±0.2	1.9±0.2	0.60	2.0	0.6	1.6	0.6	0.4	1.05	53.3

Chip Common Mode Choke

Part Numbering

CM	H	05	M	T	900
Product Type	Shielding Type	Dimensions	Impedance Tolerance	Packaging Code	Impedance
	H: Shielding	05: 0805 06: 1206	M: $\pm 20\%$	T: Taping Reel B: Bulk	900: 90 Ω 121: 120 Ω 102: 1000 Ω 222: 2200 Ω

Standard Electrical Specifications

CMH05 / Standard Type

Impedance (Ω)	Tolerance	Test Condition (MHz)	DCR (Ω) max.	IDC (mA) max.	Rated Voltage Vdc (V)	Withstanding Voltage Vdc (V)	Insulation Resistance (M Ω) min.
30	$\pm 20\%$	100	0.20	450	50	125	10
67	$\pm 20\%$	100	0.25	400	50	125	10
90	$\pm 20\%$	100	0.35	400	50	125	10
120	$\pm 20\%$	100	0.30	400	50	125	10
160	$\pm 20\%$	100	0.35	400	50	125	10
180	$\pm 20\%$	100	0.35	350	50	125	10
200	$\pm 20\%$	100	0.35	350	50	125	10
220	$\pm 20\%$	100	0.35	350	50	125	10
260	$\pm 20\%$	100	0.40	300	50	125	10
360	$\pm 20\%$	100	0.40	280	50	125	10
370	$\pm 20\%$	100	0.40	280	50	125	10







CMH06 / Standard Type

Impedance (Ω)	Tolerance	Test Condition (MHz)	DCR (Ω) max.	IDC (mA) max.	Rated Voltage Vdc (V)	Withstanding Voltage Vdc (V)	Insulation Resistance (M Ω) min.
90	$\pm 20\%$	100	0.30	370	50	125	10
120	$\pm 20\%$	100	0.30	370	50	125	10
160	$\pm 20\%$	100	0.40	340	50	125	10
260	$\pm 20\%$	100	0.50	310	50	125	10
600	$\pm 20\%$	100	0.80	260	50	125	10
1000	$\pm 20\%$	100	1.00	230	50	125	10
2200	$\pm 20\%$	100	1.20	200	50	125	10

■ All specifications are subject to change without notice






Chip Common Mode Choke

■ Characteristics (Impedance vs. Frequency)-CMH05

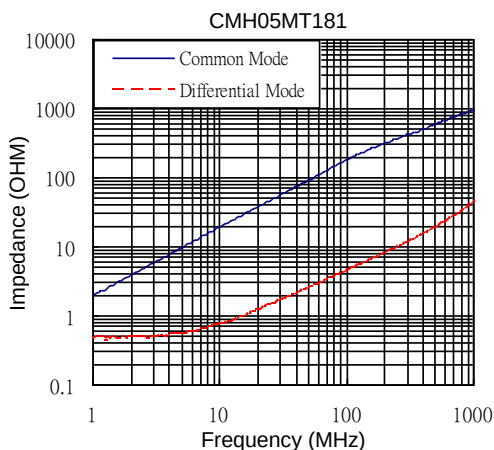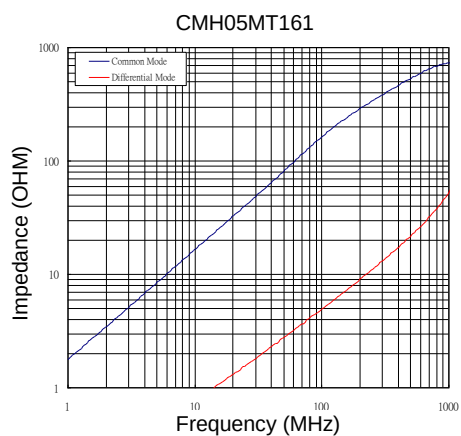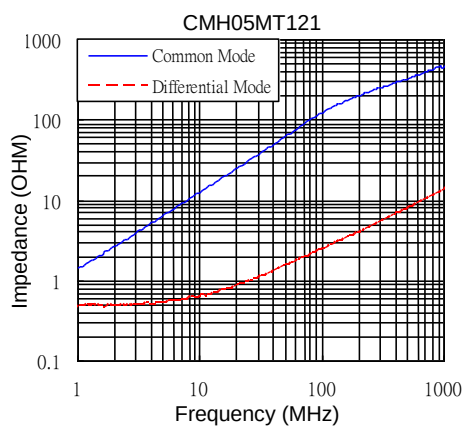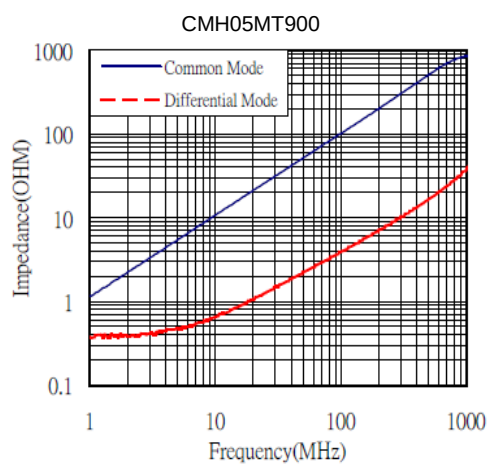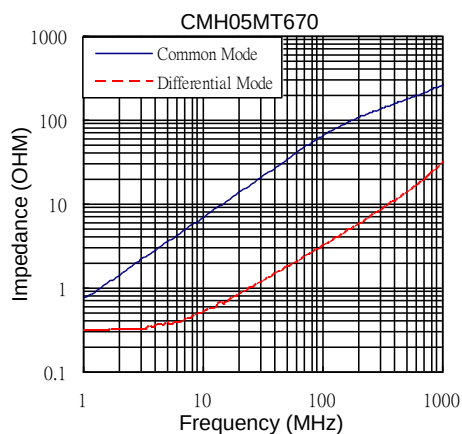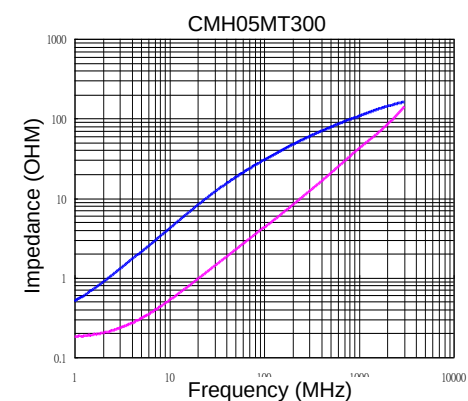


Chip Common Mode Choke

Characteristics (Impedance vs. Frequency)-CMH05

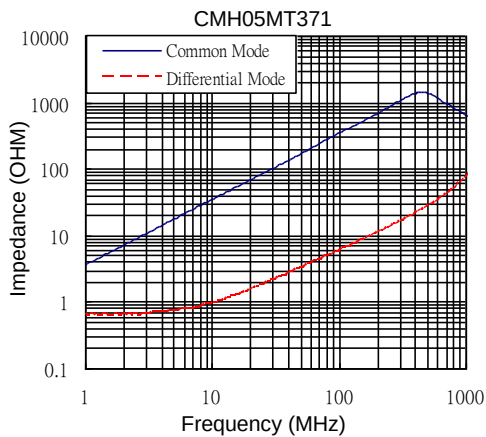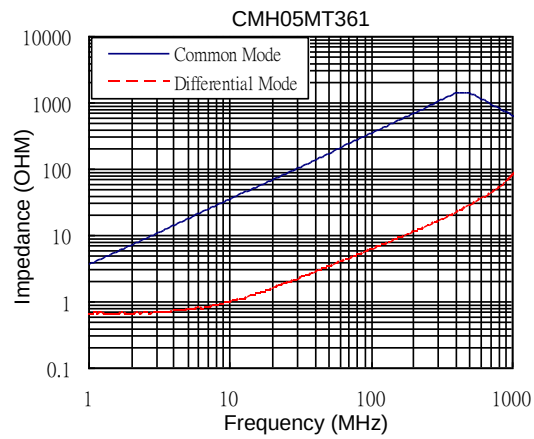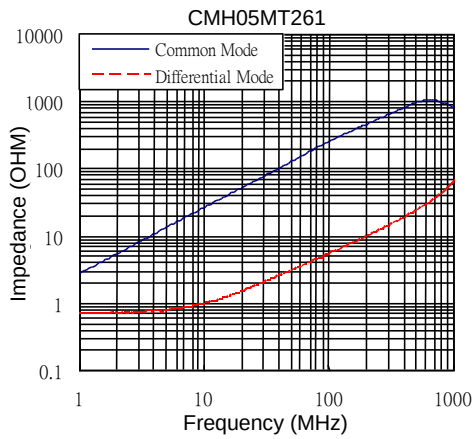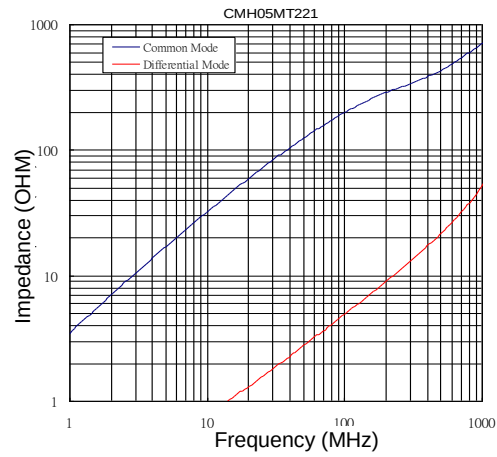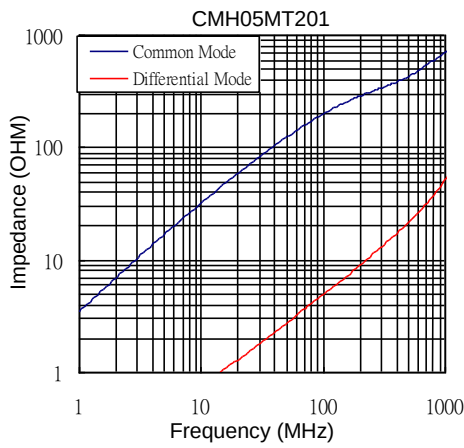

Chip Common Mode Choke

Characteristics (Impedance vs. Frequency)-CMH06

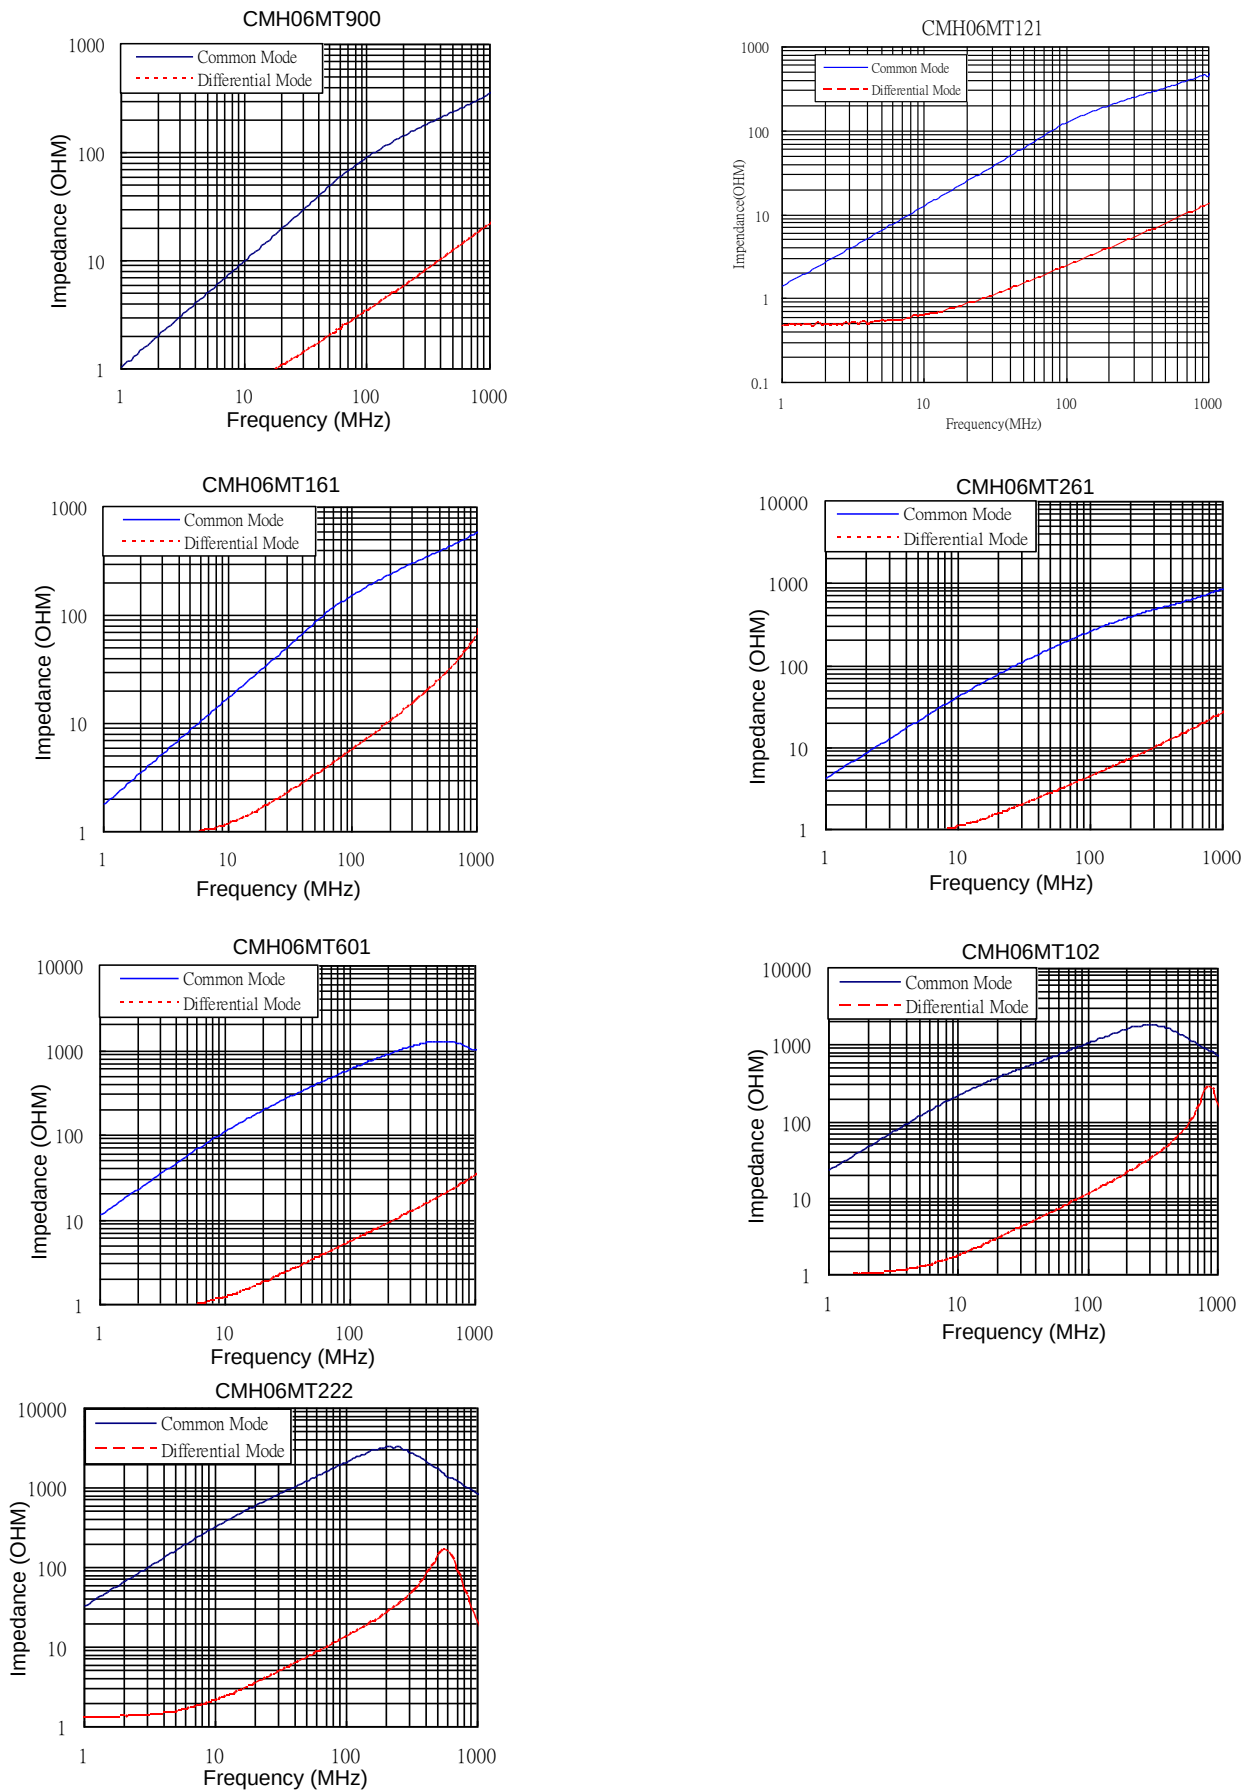

Chip Common Mode Choke

Environmental Characteristics


Electrical Performance Test

Items	Requirement	Test Conditions / Test Methods
Impedance	Refer to standard electrical characteristic spec. Component should not be damaged	LCR Meter HP 4291B
DC Resistance DCR		Micro-Ohm meter (GOM-801G)
Withstand Voltage (VDC)		Test Voltage: 2.5 Times Rated Voltage Testing Time: 60 seconds Charge Current: 0.5mA
Rated Voltage (VDC)		Test Voltage: Rated Voltage Testing Time: 1 to 5 seconds Charge Current: 1mA
Insulation Resistance (I.R)		Charge Current: 1minute 10M ohm min.

Mechanical Performance Test

Items	Requirement	Test Conditions / Test Methods
Component Adhesion (Push Test)	Base: 0805 $\geq$ 2 Lbs Cover: 0805 $\geq$ 1 Lbs Base: 1206 $\geq$ 4 Lbs Cover: 1206 $\geq$ 2 Lbs	The component should be soldered (232°C $\pm$ 5°C for 10 sec.) to tinned copper substrate Applied force gauge to the side of component It must withstand force of 2 or 4 pounds without failure of the component.
Drop	Component should not be damaged	Dropping chip by each side and corner. Drop 10 times in total Drop height: 100 cm Drop weight: 125 g
Solderability	The terminal should at least be 90% covered with solder	The component shall be dipped in a melted solder bath at 245 $\pm$ 5 for 3 seconds
Vibration Test (Low Frequency)	Component should not be damaged	1. Amplitude: 1.5 m/m 2. Frequency: 10-55-10Hz (1min.) 3. Direction: X, Y, Z 4. Duration: 2 Hrs/X, Y, Z

Climatic Test

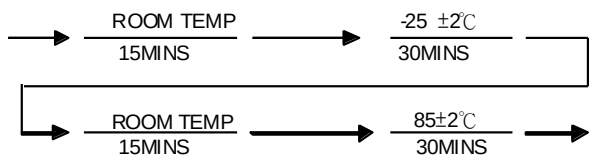Items	Requirement	Test Conditions / Test Methods
Low Temperature Storage	Impedance change: Within $\pm$ 20% Without distinct damage in appearance	1. Temp: -40 $\pm$ 2°C 2. Time: 1000 $\pm$ 48 Hours 3. Component should be tested after 1hour at room temperature
Thermal Shock		 Diagram description: A thermal shock test cycle diagram showing two cycles. Cycle 1: ROOM TEMP (15MINS) → -25 $\pm$ 2°C (30MINS) → ROOM TEMP (15MINS). Cycle 2: ROOM TEMP (15MINS) → 85 $\pm$ 2°C (30MINS) → ROOM TEMP (15MINS). Total: 5 Cycles.
High Temperature Storage		1. Temp: 85 $\pm$ 2°C 2. Time: 1000 $\pm$ 48 Hours 3. Component should be tested after 1hour at room temperature
Humidity		1. Temp: 40 $\pm$ 2°C 2. R.H. : 90 ~ 95% 3. Time: 48 $\pm$ 2 Hours
High Temperature Load Life		1. Temp: 85 $\pm$ 2°C 2. Time: 96 $\pm$ 12 Hours 3. Load: Allowed DC Current
Low Temperature Load Life	There should be no evidence of short or open circuit	1. Temp: -40 $\pm$ 2°C 2. Time: 96 $\pm$ 12 Hours 3. Load: Allowed DC Current


■ Storage Temperature: 15~28°C; Humidity < 80%RH

■ Shelf life: 1 years Max


■Packaging

Packaging Quantity & Reel Specifications

Type	ΦA	ΦB	ΦC	W	T	Quantity (EA)
CMH05	178±2.0	60±0.5	13±0.3	9±0.3	11.4±1.0	2000
CMH06	178±2.0	60±0.5	13±0.3	9±0.3	11.4±1.0	2000

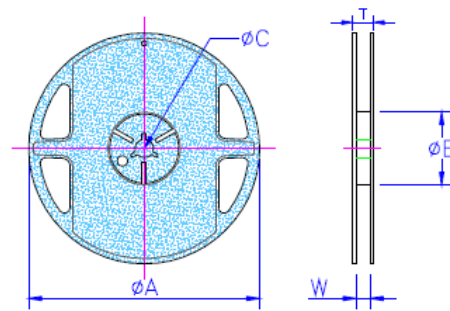


Embossed Plastic Tape Specifications

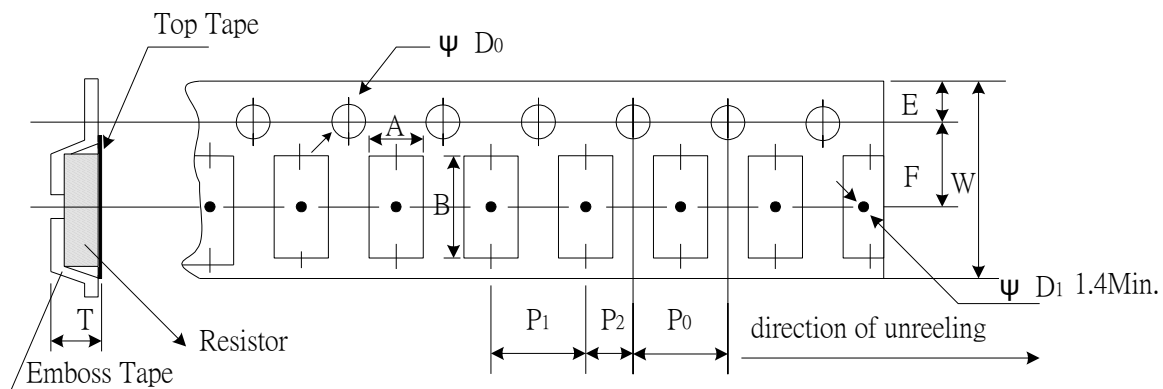

Unit: mm

Type	A	B	W	E	F	P0	P1	P2	ΦD ₀	t
CMH05	1.40±0.10	2.55±0.05	8.0±0.20	1.75±0.10	3.5±0.10	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	1.35±0.10
CMH06	1.90±0.10	3.50±0.05	8.0±0.20	1.75±0.10	3.5±0.10	4.00±0.10	4.00±0.10	2.00±0.10	1.50±0.10	2.10±0.10

Leader / Tape

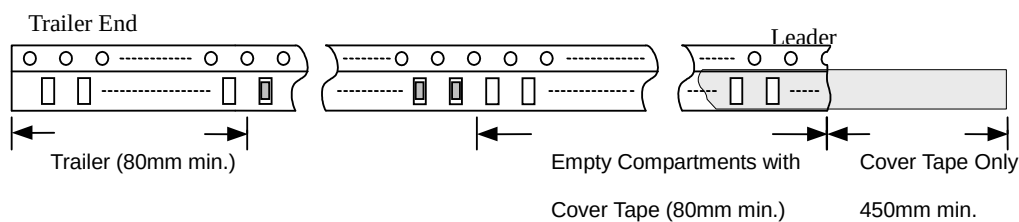


Peel-off Force

The force for tearing off cover tape is 0.05~0.69 (N) in the arrow direction at the following conditions:

Temperature: 5 ~ 35°C


Humidity: 45 ~ 85%

Atmospheric pressure: 860 ~ 1060hpa

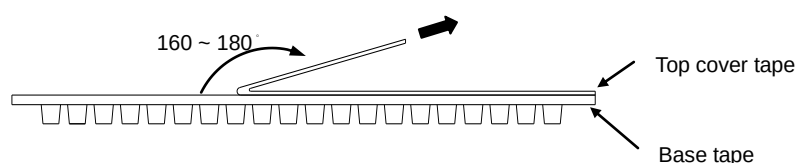


■ Reflow

Re-flow Soldering(Lead Free)

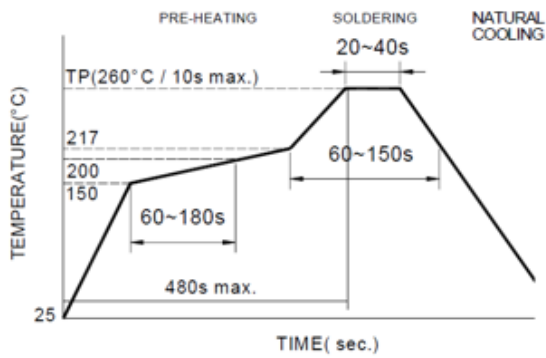

Wave Soldering

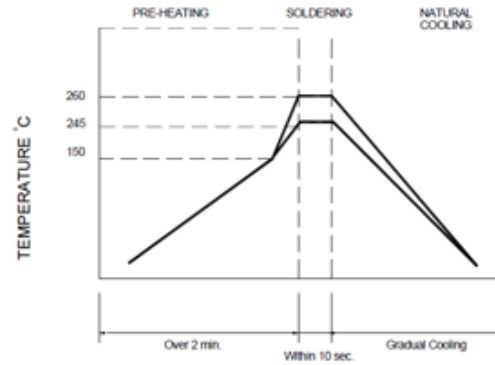

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version B1	Apr 14,2025		-Add Shelf life.