

Data Sheet

Customer:

Product: Automotive Grade Current Sensing Chip Resistor – CS..A Series

Size: 0402/0603/0805/1206/1210/2010/2512/1225/3720/7520/0508/
0612/1020

Issued Date: 01-Dec-25

Edition: REV.B7



VIKING TECH CORPORATION
光頤科技股份有限公司
No.70 Guangfu N. Rd., Hukou
Township, Hsinchu County 303,
Taiwan

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
01-Dec-25	01-Dec-25	01-Dec-25		
Alice Hsiao	Susan Huang	Susan Huang		


Automotive Grade Current Sensing Chip Resistor



■ Features

- AEC-Q200 Qualified
- Highly reliable multilayer electrode construction
- Reduced size of final equipment reliability
- 3 Watts power rating in 1 Watt size, 1225 package
- Low TCR of ± 100 PPM/°C
- Resistance values from 1m to 1 ohm
- High purity alumina substrate for high power dissipation
- Long side terminations with higher power rating
- Special construction to prevent sulfuration in a sulfur containing environment
- RoHS Compliance
- 100% CCD inspection
- MSL: Level 1

■ Construction

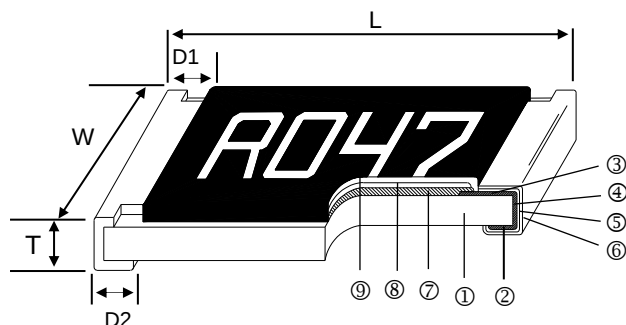

■ Applications

- Automotive Industry
- Power Management Applications
- Switching Power Supply
- Over Current Protection in Audio Applications
- Voltage Regulation Module (VRM)
- DC-DC Converter, Battery Pack, Charger, Adaptor
- Automotive Engine Control
- Disk Driver

① Alumina Substrate	④ Edge Electrode	⑦ Resistor Layer
② Bottom Electrode	⑤ Barrier Layer	⑧ Primary Overcoat
③ Top Electrode	⑥ External Electrode	⑨ Secondary Overcoat

■ Dimensions


Type	Size (Inch)	L (mm)	W (mm)	T (mm)	D1 (mm)	D2 (mm)	Weight (g) (1000pcs)
CS02	0402	1.00±0.05	0.50±0.05	0.32±0.10	0.25±0.10	0.25±0.10	0.7
CS03	0603	1.60±0.10	0.80±0.10	0.45±0.10	0.30±0.20	0.30±0.20	1.99
CS05	0805	2.00±0.10	1.25±0.10	0.55±0.10	0.30±0.20	0.40±0.25	5.3
CS06	1206	3.10±0.10	1.55±0.10	0.55±0.10	0.50±0.30	0.40±0.25	8.82
CS13	1210	3.10±0.10	2.60±0.15	0.55±0.10	0.50±0.30	0.50±0.25	15.5
CS10	2010	5.00±0.10	2.50±0.15	0.60±0.15	0.60±0.30	0.50±0.25	27.03
CS12	2512	6.35±0.10	3.10±0.15	0.60±0.10	0.60±0.30	0.55±0.25	43.08
CS12 (2W)	2512 (10 - 99mΩ)	6.35±0.20	3.15±0.15	0.74±0.10	0.60±0.30	0.55±0.25	53.08
CS12 (2W)	2512 (100 - 1000mΩ)	6.35±0.20	3.15±0.15	0.74±0.10	0.60±0.30	2.10±0.10	53.08
CS25	1225	3.20±0.15	6.45±0.15	0.90±0.15	0.60±0.30	0.80±0.25	64.88
CS37	3720	2.00±0.20	3.75±0.20	0.60±0.10	0.40±0.20	0.40±0.20	19.96
CS75	7520	2.00±0.20	7.50±0.30	0.60±0.10	0.40±0.20	0.40±0.20	35.71
CS08	0508	1.25±0.10	2.00±0.10	0.55±0.10	0.30±0.15	0.30±0.15	5.67
CS62	0612	1.55±0.10	3.10±0.15	0.55±0.10	0.30±0.15	0.45±0.15	10.19
CS20	1020	2.45±0.15	5.00±0.10	0.60±0.15	0.35±0.20	0.70±0.20	28.41

Part Numbering


CS	06	F	T	G	U	R100	A
Product Type	Dimensions (L×W)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance	Marking
	02: 0402 03: 0603 05: 0805 06: 1206 13: 1210 10: 2010 12: 2512 25: 1225 37: 3720 75: 7520 08: 0508 62: 0612 20: 1020	F: ±1% G: ±2% J: ±5%	T: Taping Reel V: 10" Taping Reel W: 13" Taping Reel	E: ±100 F: ±200 G: ±300 H: ±400 J: ±600 K: ±150	: Standard* (See Remark) S: 2W A: 1.5W T: 1W Q: 3/4W U: 1/2W V: 1/4W P: 1/5W W: 1/8W	R010: 0.01Ω R100: 0.1Ω 1R00: 1Ω	NA: No Marking A: Automotive Grade

*Remark: Standard part no need for power rating code.

Derating Curve

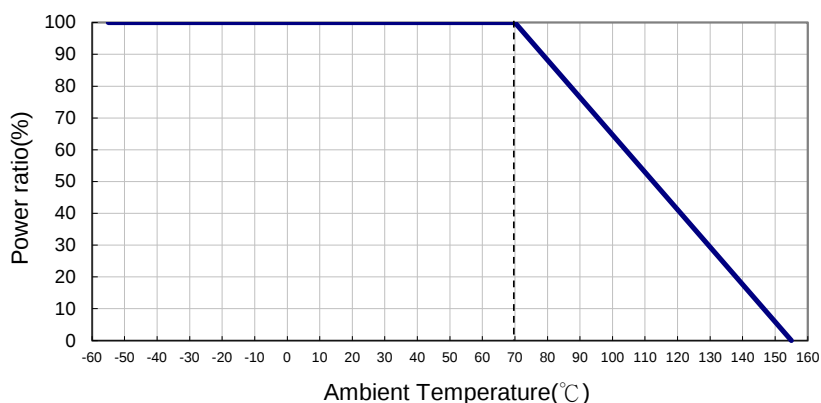

Recommend Land Pattern

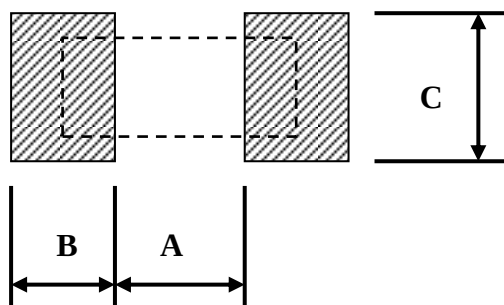


Pad Layout (Except For CS12:High Power Rating Series)

Type	A (mm)	B (mm)	C (mm)
CS02	0.50	0.50	0.60±0.2
CS03	0.80	1.00	0.90±0.2
CS05	1.00	1.00	1.35±0.2
CS06	2.00	1.15	1.70±0.2
CS13	2.00	1.15	2.50±0.2
CS10	3.60	1.40	2.50±0.2
CS12	4.90	1.60	3.20±0.2
CS25	1.20	2.00	7.00±0.2
CS37	1.00	1.80	3.90±0.2
CS75	1.00	1.80	7.60±0.2
CS08	0.55	0.90	2.00±0.2
CS62	0.60	1.00	3.20±0.2
CS20	1.00	1.20	5.00±0.2

Pad Layout (For CS12:High Power Rating Series)

Type	Resistance Range	A (mm)	B (mm)	C (mm)
CS12	10~99 mΩ	4.9	1.6	3.2±0.2
CS12	100~1000mΩ	1.0	3.55	3.2±0.2

■ Soldering Condition (Ref. IPC/JEDEC J-STD-020 & J-STD-002)

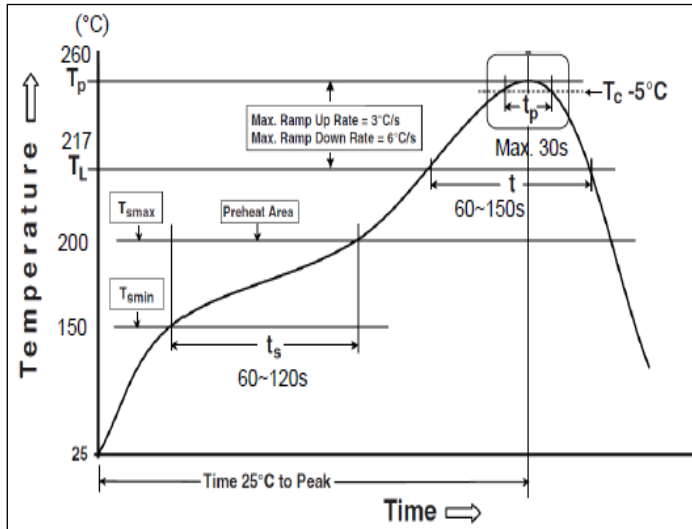

Reflow Profiles		
Profile Feature		Pb-Free Assembly
Preheat		
Min. Temperature (T _{min})		150 °C
Max Temperature (T _{max})		200 °C
Preheating time (t _s) from (T _{min} to T _{max})		60-120 seconds
Ramp-up rate (T _L to T _p)		3 °C/second max.
Liquidous temperature (T _L)		217 °C
Time (t _L) maintained above T _L		60-150 seconds
Min. Peak temperature (T _p min)		235°C
Max. Peak temperature (T _p max)		260°C
Time (t _p) within 5 °C of the specified classification temperature (T _c)		30 seconds max.
Ramp-down rate (T _p to T _L)		6 °C/second max.
Time 25 °C to peak temperature		8 minutes max.

■ Standard Electrical Specifications

Type \ Item	Power Rating at 70°C	Operating Temp. Range	Max. Operating Current	Resistance Range (mΩ)			TCR (PPM/°C)
				±1%	±2%	±5%	
CS02 (0402)	1/16W	-55 ~ +155°C	1.11A	50 - 100 102 - 500 510 - 1000			±400 ±300 ±200
CS03 (0603)	1/10W		2.23A	20 - 50 51 - 100 102 - 300 301 - 1000			±600 ±400 ±300 ±200
CS05 (0805)	1/8W		2.50A	20 - 50 51 - 100 102 - 196 200 - 1000			±600 ±400 ±300 ±200
CS06 (1206)	1/4W		5.00A	10 - 20 21 - 50 51 - 91 100 - 1000			±600 ±400 ±300 ±200
CS13 (1210)	1/2W		7.07A				
CS10 (2010)	3/4W		8.66A				
CS12 (2512)	1W		10.0A				
CS25 (1225)	3W		31.6A	3 - 5 6 - 20 21 - 30 33 - 8000			±300 ±200 ±150 ±100
CS37 (3720)	1W		10.0A	10 - 18 20 - 500			±300 ±150
CS75 (7520)	2W		44.7A	—	1 - 4		±300
				5 - 10 11 - 350		±200 ±150	
CS62 (0612)	1W		10.0A	10 – 27 30 – 91 100 – 499 500 - 1000			±600 ±300 ±200 ±100

■ High Power & Ultra High Rating Electrical Specifications

Type \ Item	Power Rating at 70°C	Operating Temp. Range	Max. Operating Current	Resistance Range (mΩ)			TCR (PPM/°C)
				±1%	±2%	±5%	
CS02 (0402)	1/8W	-55 ~ +155°C	1.58A	50 - 100 102 - 500 510 - 1000			±400 ±300 ±200
CS03 (0603)	1/8W 1/5W		1.58A				
CS05 (0805)	1/4W 1/2W		2.23A				
CS06 (1206)	1/2W		3.16A	50 - 91 100 - 1000			±300 ±200
CS13 (1210)	3/4W		3.87A				
CS10 (2010)	1W		4.47A				
CS12 (2512)	1.5W		5.47A				
CS12 (2512)	2W*		6.32A				
CS08(0508)	1W		7.07A	20 - 30 33 - 100 102 - 499 500 - 1000			±600 ±400 ±200 ±100
CS20(1020)	2W		14.14A				
				10 - 30 33 - 100 102 - 499 500 - 1000			±600 ±400 ±200 ±100

*: Ultra High Power

■ Low TCR Electrical Specifications

Type \ Item	Power Rating at 70°C	Operating Temp. Range	Max. Operating Current	Resistance Range (mΩ)			TCR (PPM/°C)
				±1%	±2%	±5%	
CS05 (0805)	1/8W	-55 ~ +155°C	1.11A	100 - 1000			±100
CS06 (1206)	1/4W		1.58A	100 - 1000			±100
CS13 (1210)	1/2W		2.58A	75 - 1000			±100
CS10 (2010)	3/4W		3.87A	50 - 1000			±100
CS12 (2512)	1W		4.47A	50 - 1000			±100
CS12 (2512)	2W		6.32A	50 - 1000			±100
CS37 (3720)	1W		3.16A	100 - 500			±100
CS75 (7520)	2W		6.32A	50 - 350			±100

Operating Voltage= $\sqrt{P \cdot R}$; Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$; Operating Current= $\sqrt{P/R}$

■ Viking is capable of manufacturing the optional spec based on customer's requirement.

■ Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	JIS C 5201-1 4.8 IEC 60115-1 4.8 At 25°C/-55°C and 25°C/+125°C, 25°C is the reference temperature
Short Time Overload	$\pm(0.5\%+0.05\Omega)$	JIS C 5201-1 4.13 IEC 60115-1 4.13
	$\pm(1.0\%+0.05\Omega)$ for high power rating	RCWV*2.5 or Max. Overload Voltage whichever is lower for 5 seconds
Insulation Resistance	$\geq 10G$	JIS C 5201-1 4.6 IEC 60115-1 4.6 Max. Overload Voltage for 1 minute
Operational Life	$\pm(1.0\%+0.05\Omega)$	MIL-STD-202 Method 108 Condition D Steady State TA=125°C at derated power. Measurement at 24±4 hours after test conclusion.
Biased Humidity	$\pm(1.0\%+0.05\Omega)$	MIL-STD-202 Method 103 1000 hrs 85°C/85%RH 10% of operating power. ($\leq 100V$)
High Temperature Exposure	$\pm(0.5\%+0.05\Omega)$	MIL-STD-202 Method 108 at +155°C for 1000 hrs
Board Flex	$\pm(1.0\%+0.05\Omega)$	AEC-Q200-005 Bending once for 60 seconds 2010, 2512 sizes: 2mm Other sizes: 3mm
Solderability	95% min. coverage	JIS C 5201-1 4.17 IEC 60115-1 4.17 J-STD-002 245±5°C for 3 seconds
Resistance to Soldering Heat	$\pm(0.5\%+0.05\Omega)$	MIL-STD-202 Method 210 260±5°C for 10 seconds
Voltage Proof	No breakdown or flashover	JIS C 5201-1 4.7 IEC 60115-1 4.7 1.42 times Max. Operating Voltage for 1 minute CS02:100V; CS03:150V; CS05/08:300V CS06/13/10/25/37/75/62/20:400V; CS12:500V
Leaching	Individual leaching area $\leq 5\%$ Total leaching area $\leq 10\%$	JIS C 5201-1 4.18 IEC 60068-2-58 8.2.1 260±5°C for 30 seconds
Temperature Cycling	$\pm(0.5\%+0.05\Omega)$	JESD22 Method JA-104 -55°C to +125°C, 1000 cycles
Mechanical Shock	$\pm(0.25\%+0.05\Omega)$	MIL-STD-202 Method 213 Wave Form: Tolerance for half sine shock pulse. Peak value is 100g's. Normal duration (D) is 6.
Vibration	$\pm(0.5\%+0.05\Omega)$	MIL-STD-202 Method 204 5 g's for 20 min., 12 cycles each of 3 orientations, 10-2000 Hz
ESD	$\pm(1\%+0.05\Omega)$	AEC-Q200-002 Human body, 2KV
Resistance to Solvents	No visible damage on appearance and marking.	MIL-STD-202 Method 215 Add Aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents.

Item	Requirement	Test Method
Terminal Strength	No broken	AEC-Q200-006 Force of 1.8kg for 60 seconds.
Flammability	No ignition of the tissue paper or scorching or the pinewood board	UL-94 V-0 or V-1 are acceptable. Electrical test not required.
Sulfur Test	$\pm(2.0\%+0.05\Omega)$	EIA-977 (Condition B) 105 $\pm$ 2°C, no power rating for 1000 hrs.


RCWV(Rated Continuous Working Voltage)= $\sqrt{P \cdot R}$ or Max. Operating Voltage whichever is lower.

■ **Storage Temperature: 15~28°C; Humidity < 80%RH**


■ **Shelf Life: 2 years from production date.**

■ Packaging


Packaging Quantity & Reel Specifications

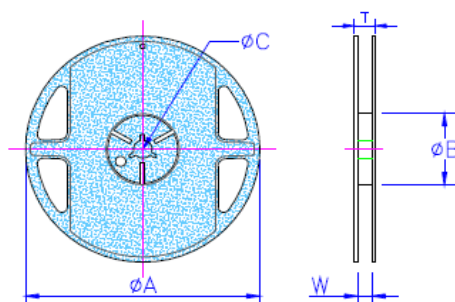

Type	Reel Diameter	ΦA (mm)	ΦB (mm)	ΦC (mm)	W (mm)	T (mm)	Paper Tape (EA)	Emboss Plastic Tape (EA)
CS02	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	9.5 $\pm$ 0.1	11.5 $\pm$ 1.0	10,000	-
	10 inch	254.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	20,000	-
	13 inch	330.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	40,000	-
CS03	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	9.5 $\pm$ 0.1	11.5 $\pm$ 1.0	5,000	-
	10 inch	254.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	10,000	-
	13 inch	330.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	20,000	-
CS05	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	9.5 $\pm$ 0.1	11.5 $\pm$ 1.0	5,000	-
	10 inch	254.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	10,000	-
	13 inch	330.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	20,000	-
CS06	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	9.5 $\pm$ 0.1	11.5 $\pm$ 1.0	5,000	-
	10 inch	254.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	10,000	-
	13 inch	330.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	20,000	-
CS13	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	9.5 $\pm$ 0.1	11.5 $\pm$ 1.0	5,000	-
	10 inch	254.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	10,000	-
	13 inch	330.0 $\pm$ 1.0	100.0 $\pm$ 0.5	13.0 $\pm$ 0.2	9.5 $\pm$ 0.5	13.5 $\pm$ 0.5	20,000	-
CS10	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	13.5 $\pm$ 1.0	15.5 $\pm$ 1.0	-	4,000
	10 inch	250.0 $\pm$ 1.0	62.0 $\pm$ 0.5	13.0 $\pm$ 0.5	12.5 $\pm$ 0.5	16.5 $\pm$ 0.5	-	8,000
CS12	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	13.5 $\pm$ 1.0	15.5 $\pm$ 1.0	-	4,000
	10 inch	250.0 $\pm$ 1.0	62.0 $\pm$ 0.5	13.0 $\pm$ 0.5	12.5 $\pm$ 0.5	16.5 $\pm$ 0.5	-	8,000
CS12(2W)	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	13.5 $\pm$ 1.0	15.5 $\pm$ 1.0	-	2,000
CS25	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	13.5 $\pm$ 1.0	15.5 $\pm$ 1.0	-	2,000
CS37	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	13.5 $\pm$ 1.0	15.5 $\pm$ 1.0	-	2,000
CS75	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	17.5 $\pm$ 1.0	19.5 $\pm$ 1.0	-	2,000
CS08	7 inch	178.5 $\pm$ 1.5	60.0 $\pm$ 1.0	13.0 $\pm$ 0.2	9.0 $\pm$ 0.5	12.5 $\pm$ 0.5	5,000	-
CS62	7 inch	178.0 $\pm$ 1.0	60.0 $\pm$ 1.0	13.5 $\pm$ 0.7	9.5 $\pm$ 0.1	11.5 $\pm$ 1.0	5,000	-
CS20	7 inch	178.5 $\pm$ 1.5	60.0 $\pm$ 1.0	13.0 $\pm$ 0.5	13.0 $\pm$ 0.5	15.5 $\pm$ 0.5	-	4,000

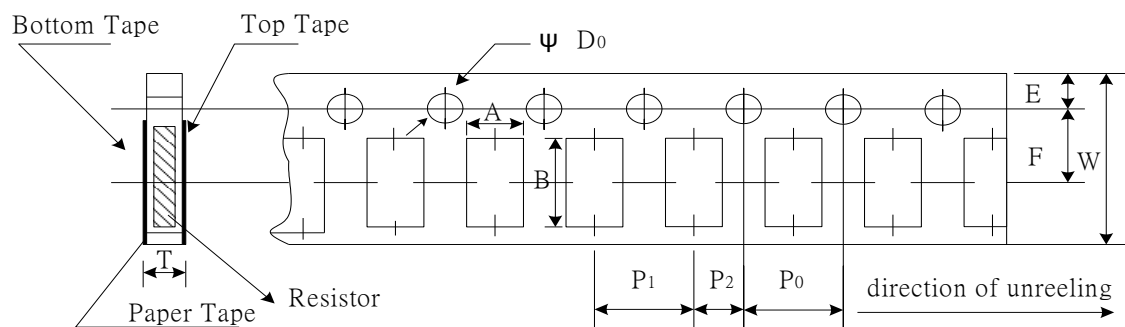Paper Tape Specifications


Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P0 (mm)	P1 (mm)	P2 (mm)	ΦD_0 (mm)	T (mm)
CS02	0.65±0.10	1.15±0.10	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.50+0.1,-0	0.45±0.10
CS03	1.10±0.10	1.90±0.10	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.70±0.10
CS05	1.60±0.10	2.40±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10
CS06	1.90±0.10	3.50±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10
CS13	2.90±0.10	3.50±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10
CS08	1.60±0.10	2.40±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10
CS62	1.90±0.10	3.50±0.20	8.0±0.20	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.10

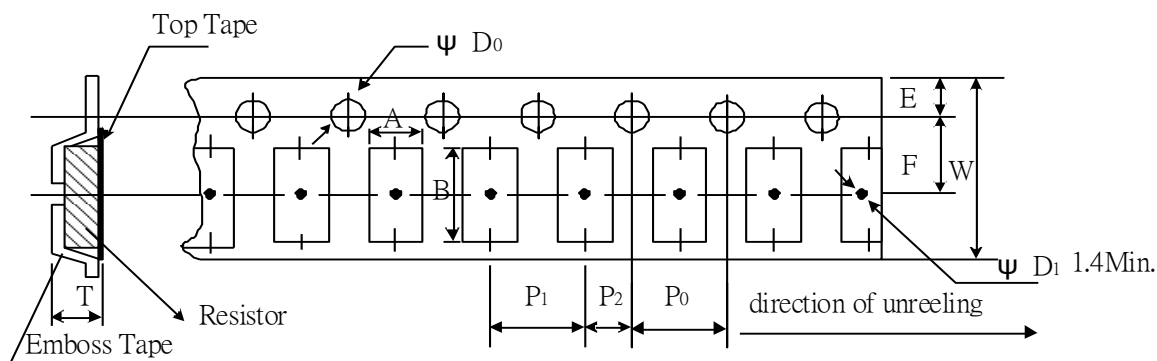Emboss Plastic Tape Specifications


Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P0 (mm)	P1 (mm)	P2 (mm)	ΦD_0 (mm)	T (mm)
CS10	2.80±0.10	5.40±0.20	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.00±0.20
CS12	3.50±0.10	6.70±0.10	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.00±0.20
CS12 (2W)	3.38±0.10	6.68±0.10	12.0±0.30	1.75±0.10	5.5±0.10	4.00±0.10	4.00±0.10	2.00±0.05	1.55+0.05	1.45±0.20
CS25	3.38±0.10	6.68±0.10	12.0±0.30	1.75±0.10	5.5±0.10	4.00±0.10	4.00±0.10	2.00±0.05	1.55+0.05	1.45±0.20
CS37	2.50±0.20	4.45±0.20	12.0±0.30	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.20±0.20
CS75	2.50±0.20	8.30±0.20	16.0±0.30	1.75±0.10	7.8±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.50+0.10	1.20±0.20
CS20	2.80±0.15	5.40±0.20	12.0±0.10	1.75±0.10	5.5±0.05	4.00±0.05	4.00±0.10	2.00±0.05	1.55+0.10	1.00±0.20

■ Marking

No Marking for 0402

1%, 5% for 0805/1206/1210/2010/2512/1225/3720/7520/0508/0612/1020: 4 digits marking

Example:

Resistance	47mΩ	75mΩ	15mΩ	750mΩ	820mΩ
Marking	R047	R075	R015	R750	R820

Marking for 0603


E24 Series ($<100\text{m}\Omega$): 3 digits marking with under-line

E24 Series ($\geq 100\text{m}\Omega$): 3 digits marking for E24 or R value suffix is zero in E96: R10=100mΩ; R28=280mΩ

E96 Series ($\geq 100\text{m}\Omega$): 3 digits marking with under-line in E96 (non-including E24 series)



3 digits marking for E24 or R value suffix is zero in E96: R10=100mΩ; R28=280mΩ



3 digits marking for E96: 243=243mΩ; 511=511mΩ

Example:

Resistance	1.000Ω	0.100Ω	0.010Ω	0.102Ω	0.024Ω
Marking	1R0	R10	R01	<u>102</u>	<u>024</u>

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version A3	Jun 03, 2014	-	- Electrical Specifications updated - CS25 Pad Layout updated
Version A4	Apr 30, 2015	-	- Environmental Characteristics updated
Version A5	Jul 15, 2016	-	- Remove Material Description - Modify Storage Temperature - CS12 Pad Layout updated
Version A6	Jan 12, 2018	-	- Modify 1225 Dimension L, W - Environmental Characteristics updated
Version A7	May 20, 2019	-	- Modify TCR Test description - Features added 100% CCD inspection - Electrical Specifications updated
Version A8	Mar 23, 2020	-	- Environmental Characteristics : Added test voltage for Voltage Proof
Version A9	Mar 10, 2021	-	- Modify 2010 Embossed Plastic Tape B Specification - Modify Soldering Condition (IPC/JEDEC J-STD-020)
Version B	Nov 15, 2021	-	- Increase the shelf life description
Version B1	Feb 15, 2022	-	- Derating Curve changes the temperature range
Version B2	May 18, 2022	-	- Add 0805 1/2W high power production range
Version B3	Jun 15, 2022	-	- Modify Soldering Condition
Version B4	Jul 08, 2024	-	- Modify the descriptions in the Features - Add 0612 production range
Version B5	Aug 26, 2025	-	- Modify the descriptions in the Features - Modify 0402 Dimensions
Version B6	Sep 17, 2025	-	- Add 0508 & 1020 production range
Version B7	Dec 01, 2025	-	- Environmental Characteristics updated - Increase large reel packaging code