

Data Sheet

Customer:

Product: High Precision Metal Film Leaded Resistor — MFD Series

Sizes.: 0727/1040

Issued Date: 31-Mar-25

Edition: REV.A6



VIKING TECH CORPORATION
光頤科技股份有限公司

No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931

FAX:886-3-5972935•886-3-5973494

E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司

No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999

FAX:886-7-8228229

E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司

No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028

TEL:86-510-85203339

FAX:86-510-85203667•86-510-85203977

E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
31-Mar-25	31-Mar-25	31-Mar-25	31-Mar-25	
Mandy Chang	Ben Chang	Ben Chang		

High Precision Metal Film Leded Resistor

■Features


- Very tight tolerance down to $\pm 0.02\%$
- Extremely low TCR down to $\pm 5\text{PPM}/^{\circ}\text{C}$
- High precision
- Excellent stability

■Applications

- Precision Equipment
- Measurement Equipment



■Construction

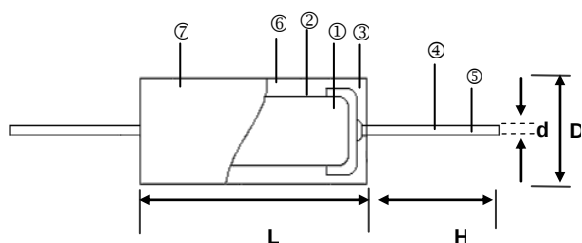


①	Ceramic Core	⑤	Lead Wire
②	Resistor Element	⑥	Molding
③	Terminal	⑦	Marking
④	Connection		

■Dimensions

Unit : mm

Type	L	D	H	d	Weight (g) (1000pcs)
MFD0727	7.0 $\pm$ 0.3	2.7 $\pm$ 0.4	26 $\pm$ 3	0.6 $\pm$ 0.05	230
MFD1040	10.2 $\pm$ 0.3	4.0 $\pm$ 0.4	25 $\pm$ 3	0.6 $\pm$ 0.05	430

■Derating Curve

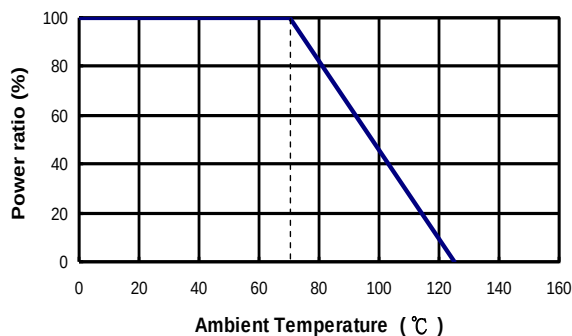

High Precision Metal Film Leaded Resistor

Part Numbering

MFD	0727	B	A	C	V	1001
Product Type	Dimensions (L×D)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance
	0727: 7.0x2.7 1040: 10.2x4.0	Q: ±0.02% A: ±0.05% B: ±0.1% F: ±1%	A: Ammo B: Bulk	S: ±5 B: ±10 N: ±15 C: ±25	U: 1/2W V: 1/4W	0100: 10Ω 2201: 2200Ω 1002: 10000Ω 1001: 1KΩ 1004: 1MΩ

Standard Electrical Specifications

Item Type	Power Rating 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range				TCR (PPM/°C)
					±0.02%	±0.05%	±0.1%	±1%	
0727	1/4W	-55 ~ +125°C	250V	500V	10Ω -500K Ω				±5
					10Ω -1M Ω				±10 ±15 ±25
1040	1/2W		300V	600V	10Ω -500K Ω				±5
					10Ω -1M Ω				±10 ±15 ±25

Operating Voltage= $\sqrt{(P \cdot R)}$ or Max. operating voltage listed above, whichever is lower.

Overload Voltage= $2.5 \cdot \sqrt{(P \cdot R)}$ or Max. overload voltage listed above, whichever is lower.

Environmental Characteristics


Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Resistance value at room temperature and room temperature+60°C
Short Time Overload	±(0.05%+0.05Ω)	JIS-C-5201-1 5.5 RCWV*2.5 or Max. overload voltage whichever is lower for 5 seconds
Insulation Resistance	> 1,000MΩ	MIL-STD-202F Method 302 Apply 500V _{DC} for 1 minute
Endurance	±(0.2%+0.05Ω)	MIL-STD-202F Method 108A 70±2°C, RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	±(0.2%+0.05Ω)	MIL-STD-202F Method 103B 40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	95% min. Coverage	MIL-STD-202F Method 208H 245±5°C for 5 seconds
Resistance to Soldering Heat	±(0.05%+0.01Ω)	350±10°C for 3 seconds or 260±5°C for 10 seconds
Terminal Strength	Tensile: ≥ 2.5kg	Tensile strength: for 10 sec. Torsional strength: Rotated through 360°, 5 rotations.
Pulse Overload	±(0.1%+0.01Ω)	JIS-C-5201-1 5.8 4 times RCWV for 10000 cycles with 1second "ON" and 25 seconds "OFF"
Temperature Cycle	±(0.05%+0.05Ω)	-25°C (30min)/+85°C (30min), 5 cycles
Resistance to Solvent	No deterioration of coatings and markings	JIS-C-5201-1 6.9 Trichroethane for 3 min. with ultrasonic

RCWV(Rated continuous working voltage)= $\sqrt{(P \cdot R)}$ or Max. Operating voltage whichever is lower

■Storage Temperature: 15~28°C; Humidity < 80%RH

■Shelf life: 1 years Max


■Taping/Packing Specifications

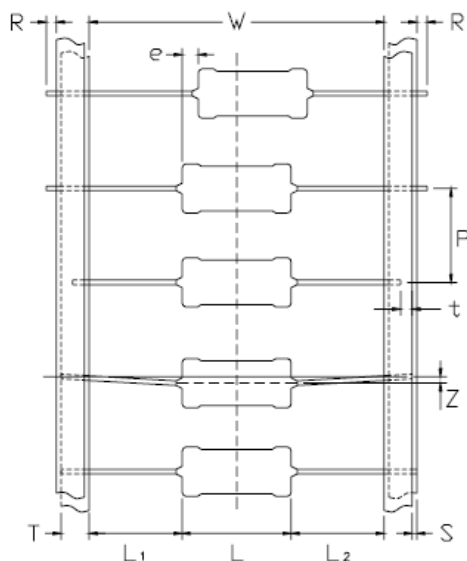

Unit: mm

Packaging Type	Packing Methods									
	L	W	P	L1-L2 Max.	T	Z Max.	R Max.	t Max.	e Max.	S Max.
0727	7.0±0.3	52±1	5±0.3	1.0	6±0.5	0.8	0	2.5	0.5	0.5
1040	10.2±0.3	52±1	5±0.3	1.0	6±0.5	0.8	0	2.5	0.5	0.5

■ Ammo Packing

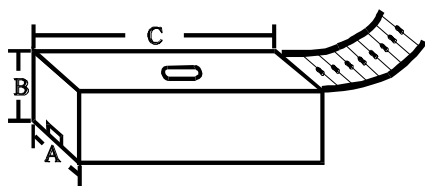

Unit: mm

Packaging Type	Ammo Packing			
	A	B	C	Qty
0727	74±1	47±1	260±1	1,000
	85±1	78±1	260±1	2,000
1040	85±1	78±1	260±1	1,000

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version A6	Mar 31,2025		-Add Shelf life.