

Data Sheet

Customer: _____

Product: Automotive Grade Pulse Withstanding Chip Resistor –
PWR..A Series

Size: 0402/0603/0805/1206/1210/2010/2512

Issued Date: 29-Jun-26

Edition: REV.B2



VIKING TECH CORPORATION
光頤科技股份有限公司
No.70 Guangfu N. Rd., Hukou
Township, Hsinchu County 303,
Taiwan

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
29-Jun-26	29-Jun-26	29-Jun-26		
Alice Hsiao	Susan Huang	Susan Huang		

Automotive Grade Pulse Withstanding Chip Resistor – PWR..A Series




■Features

- Tolerance from $\pm 0.5\%$ ~5%
- High power rating
- Excellent pulse withstanding performance
- Improved working voltage ratings
- Standard package sizes of 0402~2512
- Special construction to prevent sulfuration in a sulfur containing environment
- AEC-Q200 Qualified
- 100% CCD inspection
- MSL: Level 1
- Products with lead-free terminations meet EU RoHS requirements.
Pb-glass contained in electrodes, resistors element and glass are exempted by RoHS.

■Applications

- Metering (Testing/Measurement)
- Diagnostic Equipment
- Medical Devices
- Industrial Controls
- Plasma
- LCD Video Monitors

■Construction

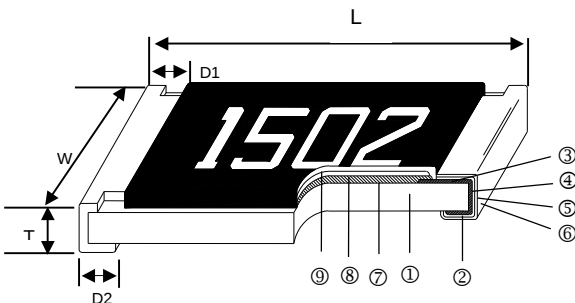


①	Alumina Substrate	⑥	External Electrode
②	Bottom Electrode	⑦	Resistor Layer
③	Top Electrode	⑧	Primary Overcoat
④	Edge Electrode	⑨	Secondary Overcoat
⑤	Barrier Layer		

■Dimensions

Type	Size (Inch)	L (mm)	W (mm)	T (mm)	D1 (mm)	D2 (mm)	Weight (g) (1000pcs)
PWR02	0402	1.00 $\pm$ 0.05	0.50 $\pm$ 0.05	0.35 $\pm$ 0.05	0.20 $\pm$ 0.10	0.25 $\pm$ 0.10	0.6
PWR03	0603	1.60 $\pm$ 0.10	0.80 $\pm$ 0.10	0.45 $\pm$ 0.10	0.30 $\pm$ 0.20	0.30 $\pm$ 0.20	2.0
PWR05	0805	2.00 $\pm$ 0.10	1.25 $\pm$ 0.10	0.50 $\pm$ 0.10	0.35 $\pm$ 0.20	0.40 $\pm$ 0.20	4.4
PWR05 (1/2W)	0805	2.00 $\pm$ 0.10	1.25 $\pm$ 0.10	0.55 $\pm$ 0.10	0.35 $\pm$ 0.20	0.40 $\pm$ 0.20	5.0
PWR06	1206	3.10 $\pm$ 0.10	1.55 $\pm$ 0.10	0.55 $\pm$ 0.10	0.50 $\pm$ 0.25	0.50 $\pm$ 0.20	8.9
PWR06 (3/4W)	1206	3.10 $\pm$ 0.10	1.55 $\pm$ 0.10	0.55 $\pm$ 0.10	0.60 $\pm$ 0.25	0.55 $\pm$ 0.25	9.5
PWR13	1210	3.10 $\pm$ 0.10	2.60 $\pm$ 0.15	0.55 $\pm$ 0.10	0.50 $\pm$ 0.25	0.50 $\pm$ 0.20	16.0
PWR10	2010	5.00 $\pm$ 0.10	2.50 $\pm$ 0.15	0.55 $\pm$ 0.10	0.60 $\pm$ 0.25	0.50 $\pm$ 0.20	24.2
PWR12	2512	6.35 $\pm$ 0.10	3.10 $\pm$ 0.15	0.55 $\pm$ 0.10	0.60 $\pm$ 0.25	0.50 $\pm$ 0.20	39.4
PWR12 (2W)	2512	6.35 $\pm$ 0.20	3.15 $\pm$ 0.15	0.60 $\pm$ 0.10	0.80 $\pm$ 0.25	0.60 $\pm$ 0.30	42.0

Derating Curve

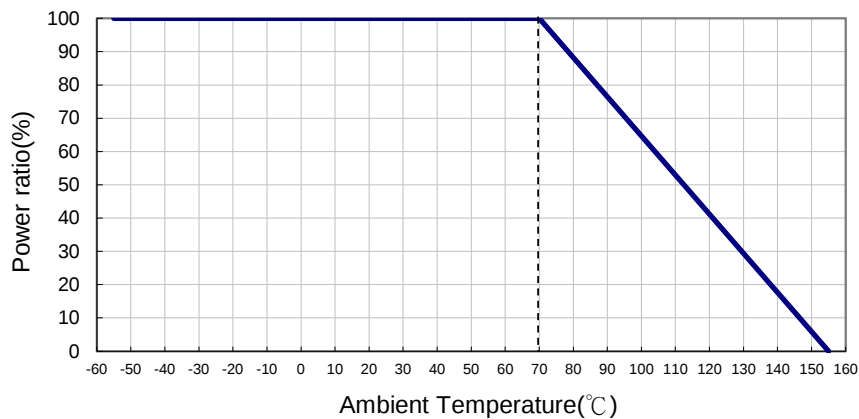

Part Numbering

PWR	12	J	T	E	S	1001	A
Product Type	Dimensions	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance	Marking
	02: 0402 03: 0603 05: 0805 06: 1206 13: 1210 10: 2010 12: 2512	D: ±0.5% F: ±1% J: ±5% -: No specified (for Jumper)	T: 7"Taping Reel V: 10"Taping Reel W: 13"Taping Reel	E: ±100 F: ±200 G: ±300 4: ±350 -: No specified (for Jumper)	A: 1.5W T: 1W Q: 3/4W U: 1/2W G: 2/5W O: 1/3W V: 1/4W W: 1/8W X: 1/10W P: 1/5W S: 2W K: 1.25W	1001: 1KΩ 1004: 1MΩ R0R0: 0Ω	A: Automotive Grade NA: Automotive Grade & No Marking

Standard Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range			TCR (PPM/°C)
					±0.5% (E24,E96)	±1% (E24,E96)	±5% (E24)	
PWR02 (0402)	1/5W	-55 ~ +155°C	50V	100V	-	1Ω-20Ω		±300
					100Ω-1MΩ	10Ω-1MΩ		±100
PWR03 (0603)	1/10W	-55 ~ +155°C	50V	100V	10Ω - 294Ω	1Ω - 294Ω		±200
					7.15Ω - 1MΩ			±100
PWR05 (0805)	1/8W	-55 ~ +155°C	150V	300V	10Ω - 294Ω	1Ω - 294Ω		±200
					3Ω - 20MΩ			±100
PWR06 (1206)	1/3W	-55 ~ +155°C	200V	400V	10Ω - 20Ω	1Ω - 20Ω		±200
					5.1Ω - 20MΩ			±100
PWR13 (1210)	1/2W	-55 ~ +155°C	200V	400V	10Ω - 20Ω	1Ω - 20Ω		±200
					10Ω - 20MΩ			±100
PWR10 (2010)	3/4W	-55 ~ +155°C	400V	800V	10Ω - 20Ω	1Ω - 20Ω		±200
					10Ω - 20MΩ			±100
PWR12 (2512)	1.5W	-55 ~ +155°C	500V	1000V	10Ω - 20Ω	1Ω - 20Ω		±200
					10Ω - 20MΩ			±100

■High Power & Ultra High Power Rating Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range			TCR (PPM/°C)
					±0.5% (E24,E96)	±1% (E24,E96)	±5% (E24)	
PWR03 (0603)	1/4W 1/3W	-55 ~ +155°C	75V	150V	10Ω - 294Ω	1Ω - 294Ω		±200
					7.15Ω- 1MΩ		±100	
PWR05 (0805)	2/5W	-55 ~ +155°C	150V	300V	10Ω - 294Ω	1Ω - 294Ω		±200
					3Ω- 1MΩ		±100	
PWR05 (0805)	1/2W *	-55 ~ +155°C	400V	600V	10Ω - 294Ω	1Ω - 294Ω		±200
					10Ω - 1MΩ		±100	
PWR06 (1206)	1/2W	-55 ~ +155°C	200V	400V	10Ω - 20Ω	1Ω - 20Ω		±200
					5.1Ω- 1MΩ		±100	
PWR06 (1206)	3/4W *	-55 ~ +155°C	500V	1000V	10Ω - 20Ω	1Ω - 20Ω		±200
					10Ω - 1MΩ		±100	
PWR13 (1210)	3/4W 1W	-55 ~ +155°C	200V	400V	10Ω - 20Ω	1Ω - 20Ω		±200
					10Ω - 1MΩ		±100	
PWR10 (2010)	1W 1.25W	-55 ~ +155°C	400V	800V	10Ω - 20Ω	1Ω - 20Ω		±200
					10Ω - 1MΩ		±100	
PWR12 (2512)	2W *	-55 ~ +155°C	500V	1000V	10Ω	1Ω - 10Ω		±350
					10Ω -200K		±100	

■Low Ohmic Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Current	Resistance Range		TCR (PPM/°C)
				±1% (E24,E96)	±5% (E24)	
PWR06 (1206)	1/2W	-55 ~ +155°C	2.23A	100mΩ~976 mΩ		±200
PWR13 (1210)	3/4W	-55 ~ +155°C	2.73A	100mΩ~976 mΩ		±200
PWR10 (2010)	1.25W	-55 ~ +155°C	3.53A	100mΩ~976 mΩ		±200
PWR12 (2512)	2W	-55 ~ +155°C	4.47A	100mΩ~976 mΩ		±200

■ Jumper(0Ω)

Type \ Item	Power Rating	Rated Current	Overload Current	Resistance	Operating Temp. Range
PWR02 (0402)	1/5W	3A	6A	0Ω (≤10mΩ)	-55 ~ +155°C
PWR03 (0603)	1/3W	5A	10A	0Ω (≤8mΩ)	
PWR05 (0805) *	1/2W	6A	12A	0Ω (≤5mΩ)	
PWR06 (1206) *	3/4W	10A	20A	0Ω (≤5mΩ)	
PWR13 (1210)	1W	12A	24A	0Ω (≤4mΩ)	
PWR10 (2010)	1.25W	12A	24A	0Ω (≤5mΩ)	
PWR12 (2512)	2W	16A	32A	0Ω (≤5mΩ)	

*: Ultra High Power: double side printed resistor element


Operating Voltage= $\sqrt{P \cdot R}$ or Max. Operating Voltage listed above, whichever is lower.

Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$ or Max. Overload Voltage listed above, whichever is lower.

The power rating depends on the maximum temperature of the resistive element. Due to the power dissipation of the resistor, the temperature of the resistive element will rise depending on the condition of heat dissipation from PCB. The maximum power rating in application only applies if the temperature of the resistive element is not exceed 155°C.

■ Viking is capable of manufacturing the optional spec based on customer's requirement.

■ Soldering Condition (Ref. IPC/JEDEC J-STD-020 & J-STD-002)

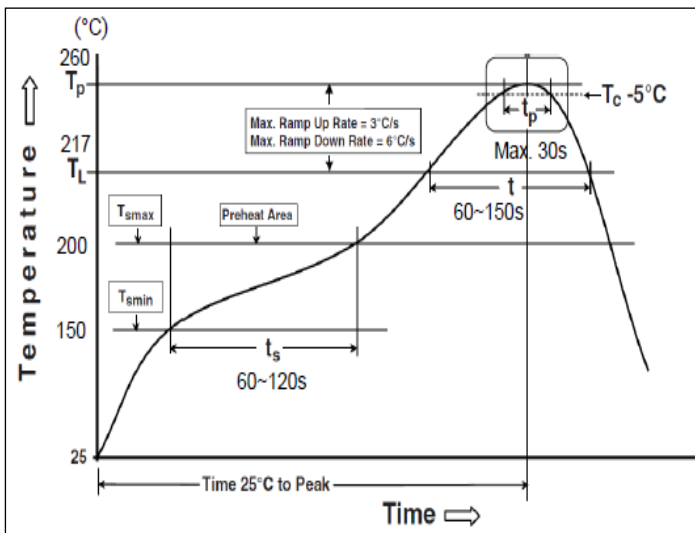

Reflow Profiles	
Profile Feature	Pb-Free Assembly
Preheat	
Min. Temperature (T_{smin})	150 °C
Max Temperature (T_{smax})	200 °C
Preheating time (t_s) from (T_{smin} to T_{smax})	60-120 seconds
Ramp-up rate (T_L to T_p)	3 °C/second max.
Liquidous temperature (T_L)	217 °C
Time (t_L) maintained above T_L	60-150 seconds
Min. Peak temperature (T_p min)	235°C
Max. Peak temperature (T_p max)	260°C
Time (t_p) within 5 °C of the specified classification temperature (T_c)	30 seconds max.
Ramp-down rate (T_p to T_L)	6 °C/second max.
Time 25 °C to peak temperature	8 minutes max.

■Environmental Characteristics

Item	Requirement		Test Method
	±5% and Below	Jumper	
Temperature Coefficient of Resistance (T.C.R.)	As Spec.		JIS-C-5201-1 4.8 IEC-60115-1 4.8 At 25°C/-55°C and 25°C/+125°C, 25°C is the reference temperature
Short Time Overload	$\Delta R: \pm(1.0\% + 0.05\Omega)$	As Spec.	JIS-C-5201-1 4.13 IEC-60115-1 4.13 RCWV*2.5 or Max. Overload Voltage whichever is lower for 5 seconds Jumper: $2 \times I_{\max}$ for 5 seconds
Insulation Resistance	≥10G		JIS-C-5201-1 4.6 IEC-60115-1 4.6 Max. Overload Voltage for 1 minute
Operational Life	$\Delta R: \pm(1.0\% + 0.05\Omega)$	As Spec.	MIL-STD-202 Method 108 Condition D Steady State TA=125°C at derated power. Measurement at 24±4 hours after test conclusion.
Biased Humidity	$\Delta R: \pm(1.0\% + 0.05\Omega)$	As Spec.	MIL-STD-202 Method 103 1000 hrs 85°C/85%RH 10% of operating power (≤100 V)
High Temperature Exposure	$\Delta R: \pm(1.0\% + 0.05\Omega)$	As Spec.	MIL-STD-202 Method 108 at +155°C for 1000 hrs
Board Flex	$\Delta R: \pm(1.0\% + 0.05\Omega)$	As Spec.	AEC-Q200-005 Bending once for 60 seconds 2010, 2512 sizes: 2mm Other sizes: 3mm
Solderability	95% min. coverage		JIS-C-5201-1 4.17 IEC-60115-1 4.17 245±5°C for 3 seconds
Resistance to Soldering Heat	$\Delta R: \pm(0.5\% + 0.05\Omega)$	As Spec.	JIS-C-5201-1 4.18 IEC-60115-1 4.18 260±5°C for 10 seconds
Voltage Proof	No breakdown or flashover		JIS-C-5201-1 4.7 IEC-60115-1 4.7 1.42 times Max. Operating Voltage for 1 minute
Leaching	Individual leaching area ≤5% Total leaching area ≤10%		JIS-C-5201-1 4.18 IEC-60068-2-58 8.2.1 260±5°C for 30 seconds
Temperature Cycling	$\Delta R: \pm(0.5\% + 0.05\Omega)$	As Spec.	JESD22 Method JA-104 -55°C to +125°C, 1000 cycles
Mechanical Shock	$\Delta R: \pm(0.25\% + 0.05\Omega)$	As Spec.	MIL-STD-202 Method 213 Wave Form: Tolerance for half sine shock pulse. Peak value is 100g's. Normal duration (D) is 6.
Vibration	$\Delta R: \pm(0.5\% + 0.05\Omega)$	As Spec.	MIL-STD-202 Method 204 5 g's for 20 min., 12 cycles each of 3 orientations, 10-2000 Hz
ESD	$\Delta R: \pm(3\% + 0.05\Omega)$		AEC-Q200-002 Human body model 0402/0603: 1KV 0805 and above: 2KV
Resistance to Solvents	No visible damage on appearance and marking.		MIL-STD-202 Method 215 Add Aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents.

Item	Requirement		Test Method
	±5% and Below	Jumper	
Terminal Strength	No broken		AEC-Q200-006 Force of 1.8kg for 60 seconds.
Flammability	No ignition of the tissue paper or scorching or the pinewood board		UL-94 V-0 or V-1 are acceptable. Electrical test not required.
Sulfur Test	$\Delta R \pm 5\%$	As Spec.	EIA-977 (Condition B) 105±2°C, no power rating for 1000 hrs.


RCWV(Rated Continuous Working Voltage)= $\sqrt{P \cdot R}$ or Max. Operating Voltage whichever is lower.

■ **Storage Temperature: 15~28°C; Humidity < 80%RH**

■ **Shelf Life: 2 years from production date.**


■ Packaging

Reel Specifications & Packaging Quantity

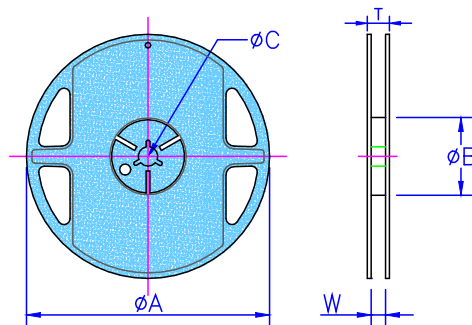


Type	Packaging Quantity	Tape Width	Reel Diameter	ΦA (mm)	ΦB (mm)	ΦC (mm)	W (mm)	T (mm)
PWR02	Paper	10K	8mm	7 inch	178.5±1.5	60 ^{+1/-0}	13.0±0.2	9.0±0.5
		20K	8mm	10 inch	254±1.0	100±0.5	13.0±0.2	9.5±0.5
		40K	8mm	13 inch	330±1.0	100±0.5	13.0±0.2	9.5±0.5
PWR03 PWR05 PWR06 PWR13	Paper	5K	8mm	7 inch	178.5±1.5	60 ^{+1/-0}	13.0±0.2	9.0±0.5
		10K	8mm	10 inch	254±1.0	100±0.5	13.0±0.2	9.5±0.5
		20K	8mm	13 inch	330±1.0	100±0.5	13.0±0.2	9.5±0.5
PWR10 PWR12	Embossed	4K	12mm	7 inch	178.5±1.5	60 ^{+1/-0}	13.0±0.5	15.5±0.5
		8K	12mm	10 inch	250±1.0	62±0.5	13.0±0.5	16.5±0.5

Paper Tape Specifications

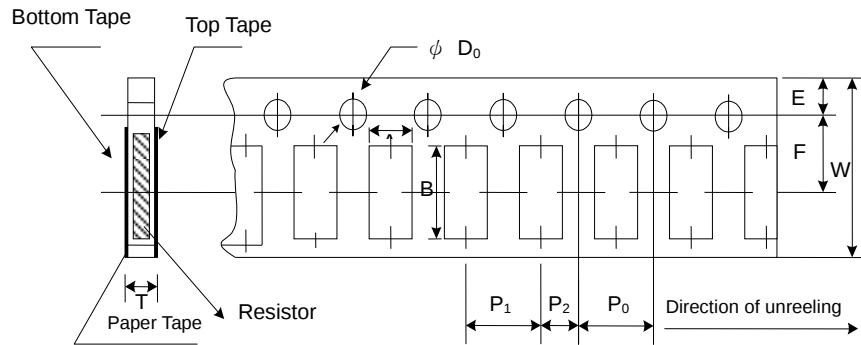


Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P ₀ (mm)	P ₁ (mm)	P ₂ (mm)	ΦD ₀ (mm)	T (mm)
PWR02	0.65±0.10	1.15±0.10	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	2.00±0.05	2.00±0.05	1.50+0.1,-0	0.45±0.1
PWR03	1.10±0.10	1.90±0.10	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.70±0.1
PWR05	1.60±0.10	2.40±0.20	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.1
PWR06	1.90±0.10	3.50±0.20	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.1
PWR13	2.90±0.10	3.50±0.20	8.0±0.2	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.05	2.00±0.05	1.50+0.1,-0	0.85±0.1

Embossed Plastic Tape Specifications

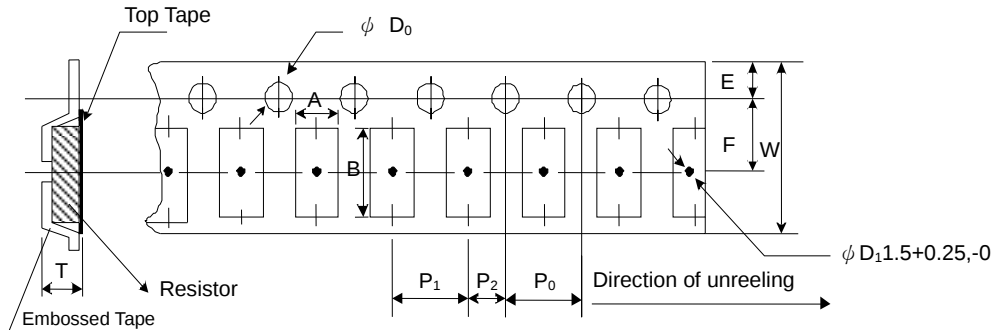

Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P ₀ (mm)	P ₁ (mm)	P ₂ (mm)	ΦD ₀ (mm)	T (mm)
PWR10	2.8±0.10	5.40±0.20	12.0±0.3	1.75±0.1	5.5±0.05	4.00±0.10	4.00±0.1	2.00±0.05	1.50+0.1, -0	1.2 ⁺⁰
PWR12	3.5±0.10	6.70±0.10	12.0±0.3	1.75±0.1	5.5±0.05	4.00±0.10	4.00±0.1	2.00±0.05	1.50+0.1, -0	1.2 ⁺⁰

Recommend Land Pattern

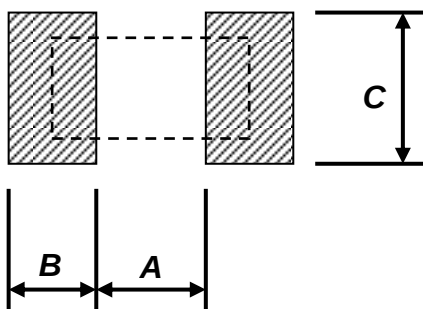

Type	A (mm)	B (mm)	C (mm)
PWR02	0.50	0.45	0.60
PWR03	0.90	0.60	0.90
PWR05	1.20	0.70	1.30
PWR06	2.00	0.90	1.60
PWR13	2.00	0.90	2.80
PWR10	3.80	0.90	2.80
PWR12	4.90	1.00	3.40

■ Marking

No Marking for 0402

Jumper for all: Letter "0"

0805~2512 4 digits marking for Example

Resistance	100mΩ	5.6Ω	97.6Ω	100Ω	2.2KΩ	10KΩ	49.9KΩ	100KΩ	1MΩ
marking	R100	5R60	97R6	1000	2201	1002	4992	1003	1004

0603: 3 digits marking in E24

Example: 101=100Ω 102=1KΩ (1st and 2nd are E24 code and 3rd code is multiplier)

E24 code	10	11	12	13	15	16	18	20	22	24	27	30	33	36	39	43	47	51	56	62	68	75	82	91
----------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

1% for 0603: 3 digits marking in E96 (E96 series except E24 series)





digits marking for Example: 13C=13K3Ω 68B=4K99Ω 68X=49.9Ω

Marking Table

Code	E96		Code	E96		Code	E96		Code	E96		
02	102		28	191		52	340		75	590		
03	105		29	196		53	348		76	604		
04	107		31	205		54	357		77	619		
06	113		32	210		55	365		78	634		
07	115		33	215		56	374		79	649		
08	118		34	221		57	383		80	665		
09	121		35	226		58	392		81	681		
10	124		36	232		59	402		82	698		
11	127		37	237		60	412		83	715		
13	133		38	243		61	422		84	732		
14	137		39	249		62	432		86	768		
15	140		40	255		63	442		87	787		
16	143		41	261		64	453		88	806		
17	147		42	267		65	464		89	825		
19	154		43	274		66	475		90	845		
20	158		44	280		67	487		91	866		
21	162		45	287		68	499		92	887		
22	165		46	294		69	511		93	909		
23	169		47	301		70	523		94	931		
24	174		48	309		71	536		95	953		
25	178		49	316		72	549		96	976		
26	182		50	324		73	562					
27	187		51	332		74	576					
Code	A		B	C	D	E	F	G	X	Y		
Multiplier	10 ⁰		10 ¹	10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁻¹	10 ⁻²		


■ Lightning Surge

Resistors are tested in accordance with IEC 60115-1 using both 1.2/50us and 10/700 pulse shapes. The limit of acceptance is a shift in resistance of less than 1% from the initial value.

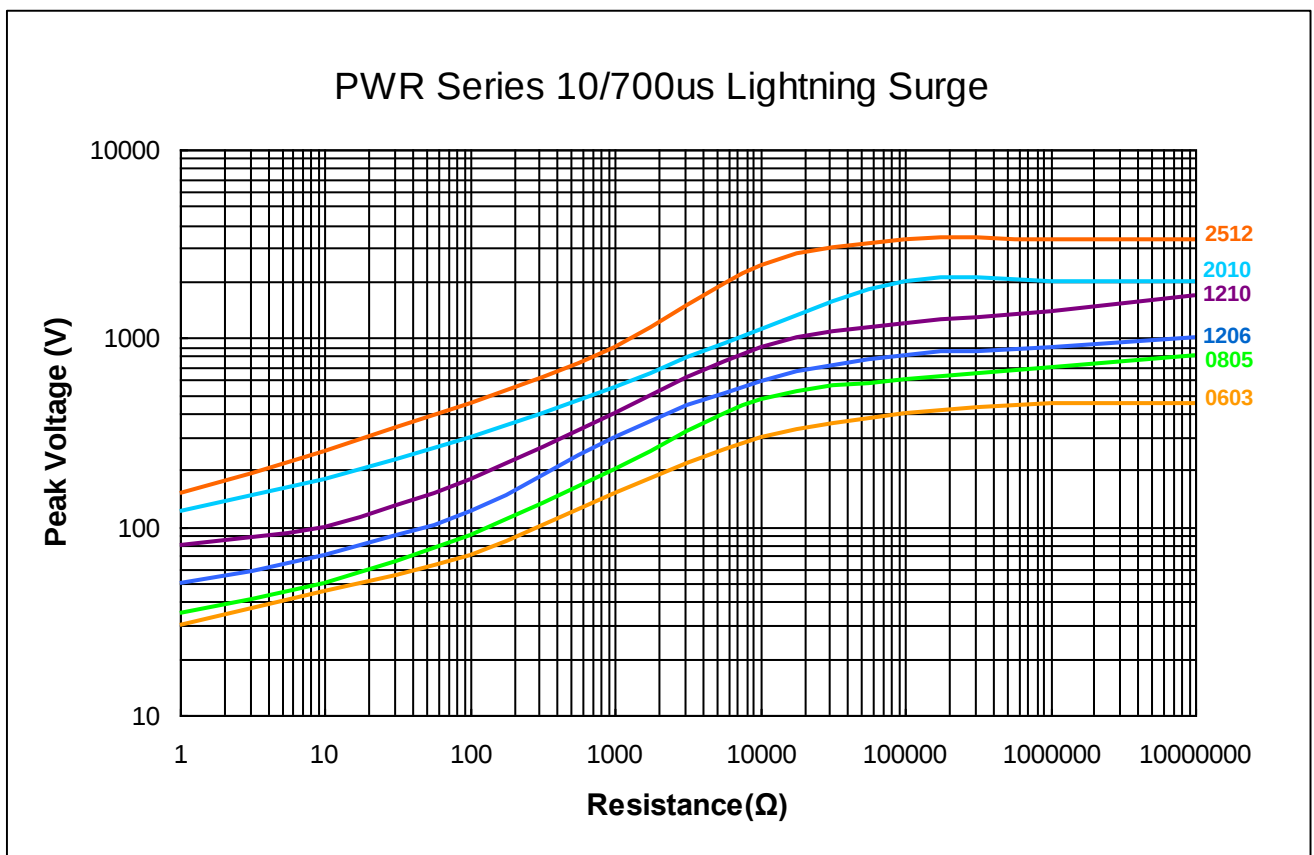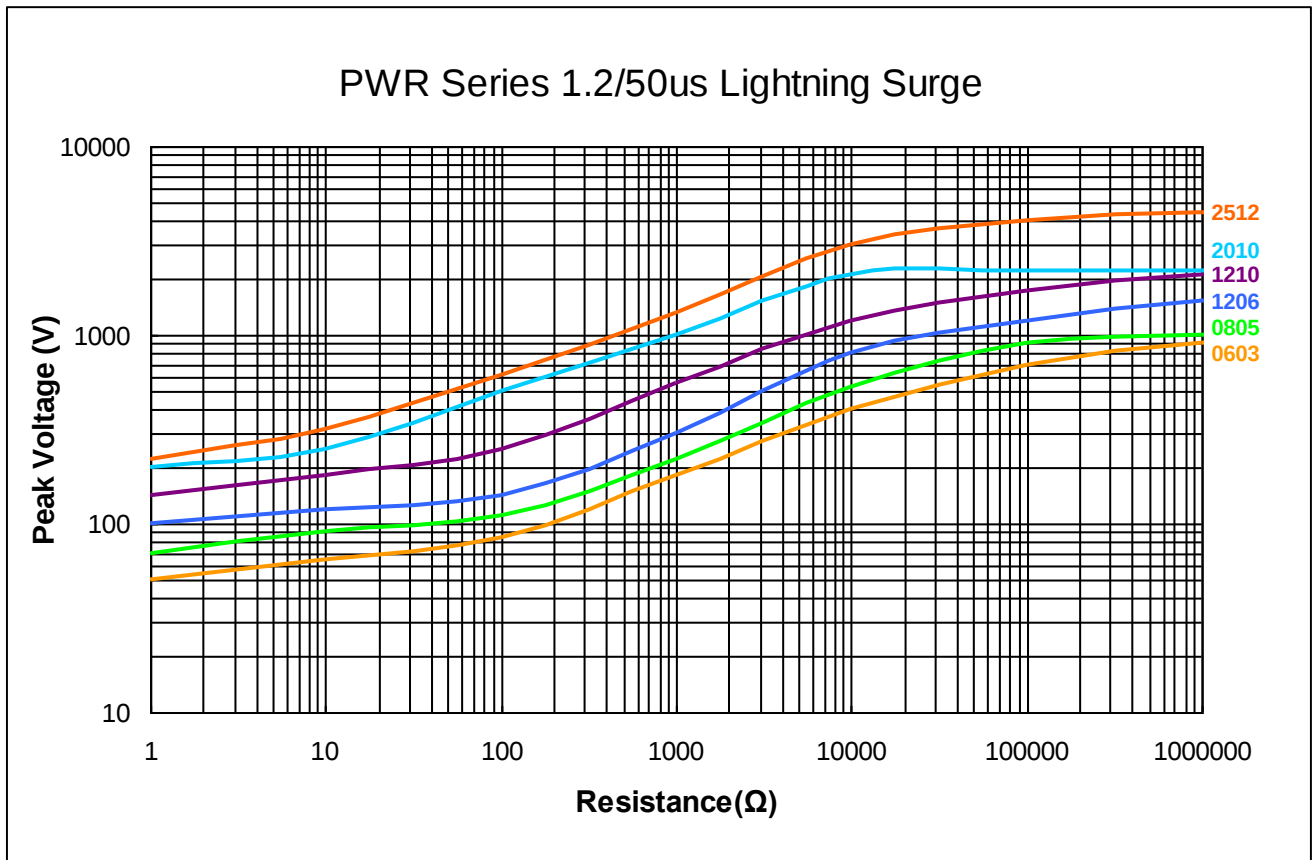



■ Pulse withstanding capacity

The limit of acceptance was a shift in resistance of less than 1% from the initial value. The power applied was subject to the restrictions of the maximum permissible impulse voltage graph shown.

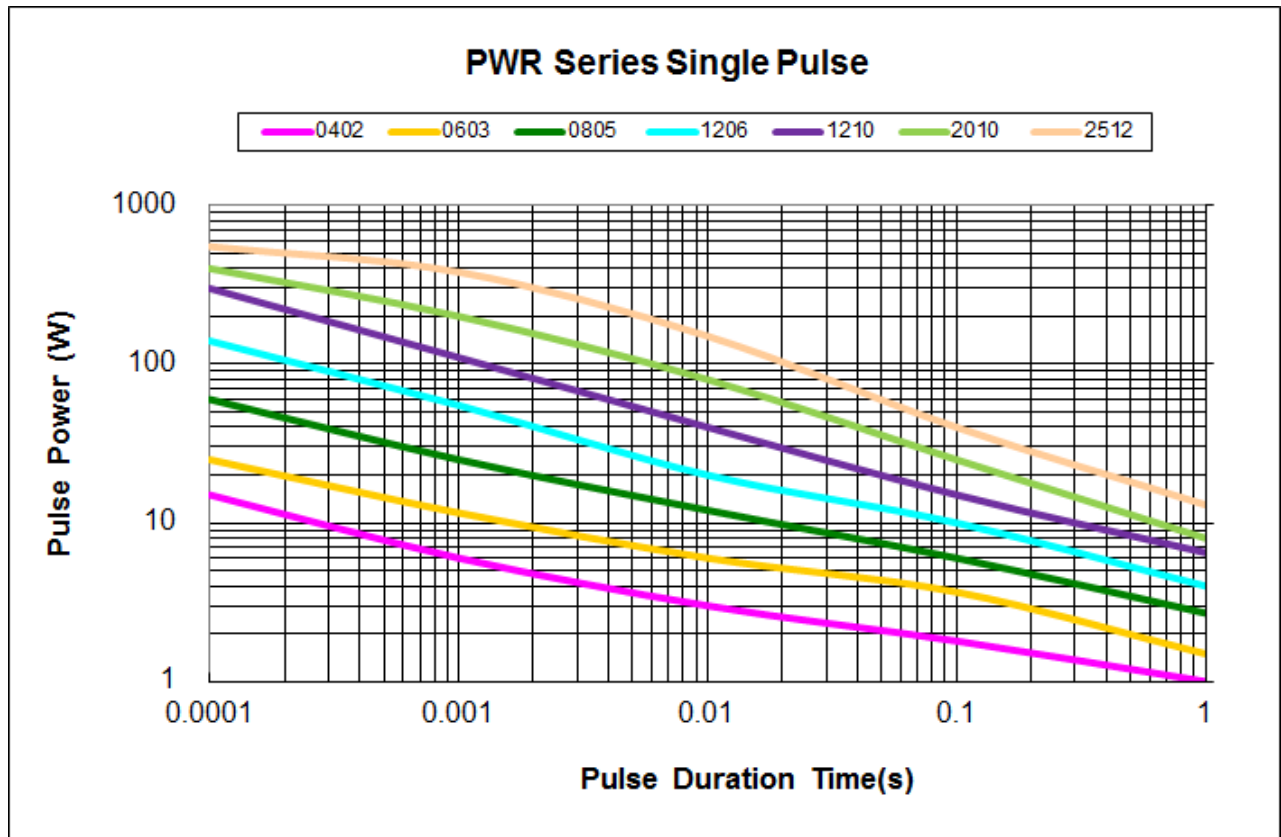

■ Continuous Pulse

The continuous load graph was obtained by applying repetitive rectangular pulses where the pulse period was adjusted so that the average power dissipated in the resistor was equal to its rated power at 70°C. Again the limit of acceptance was a shift in resistance of less than 1% from the initial value.

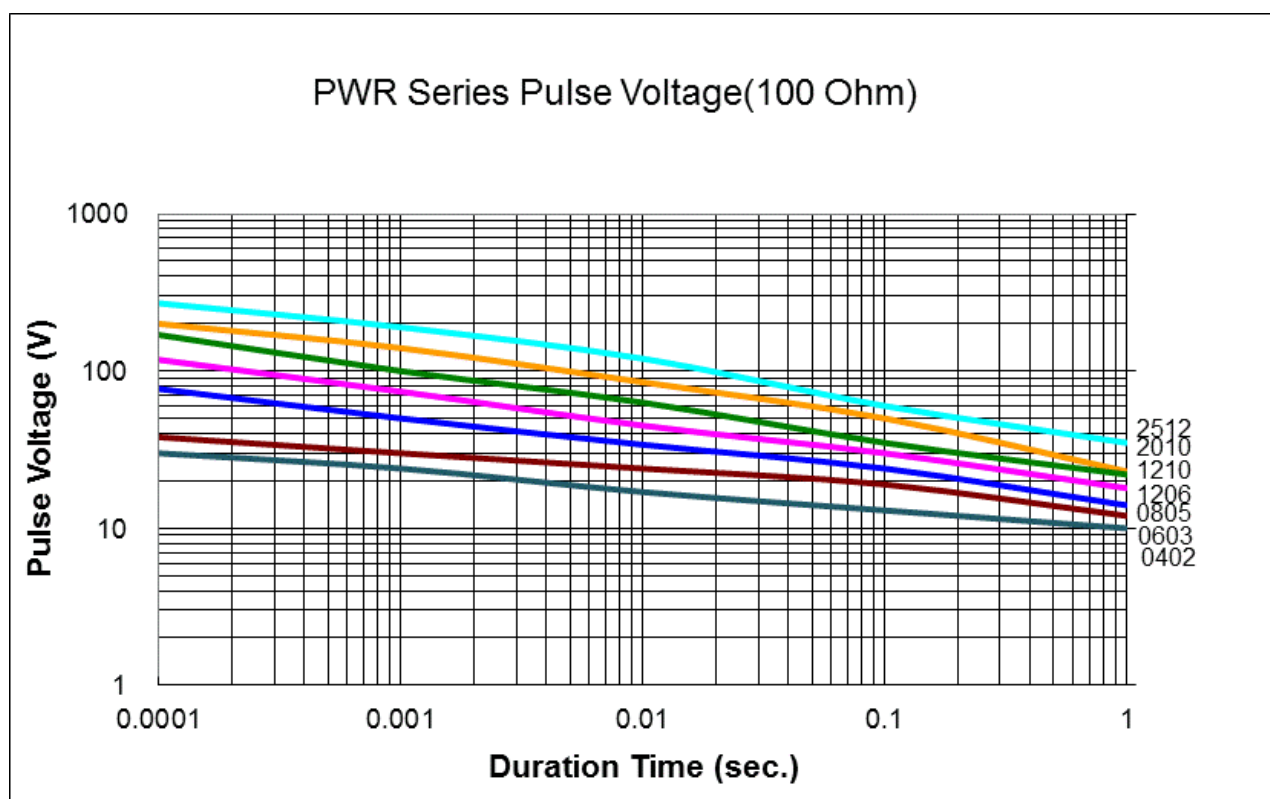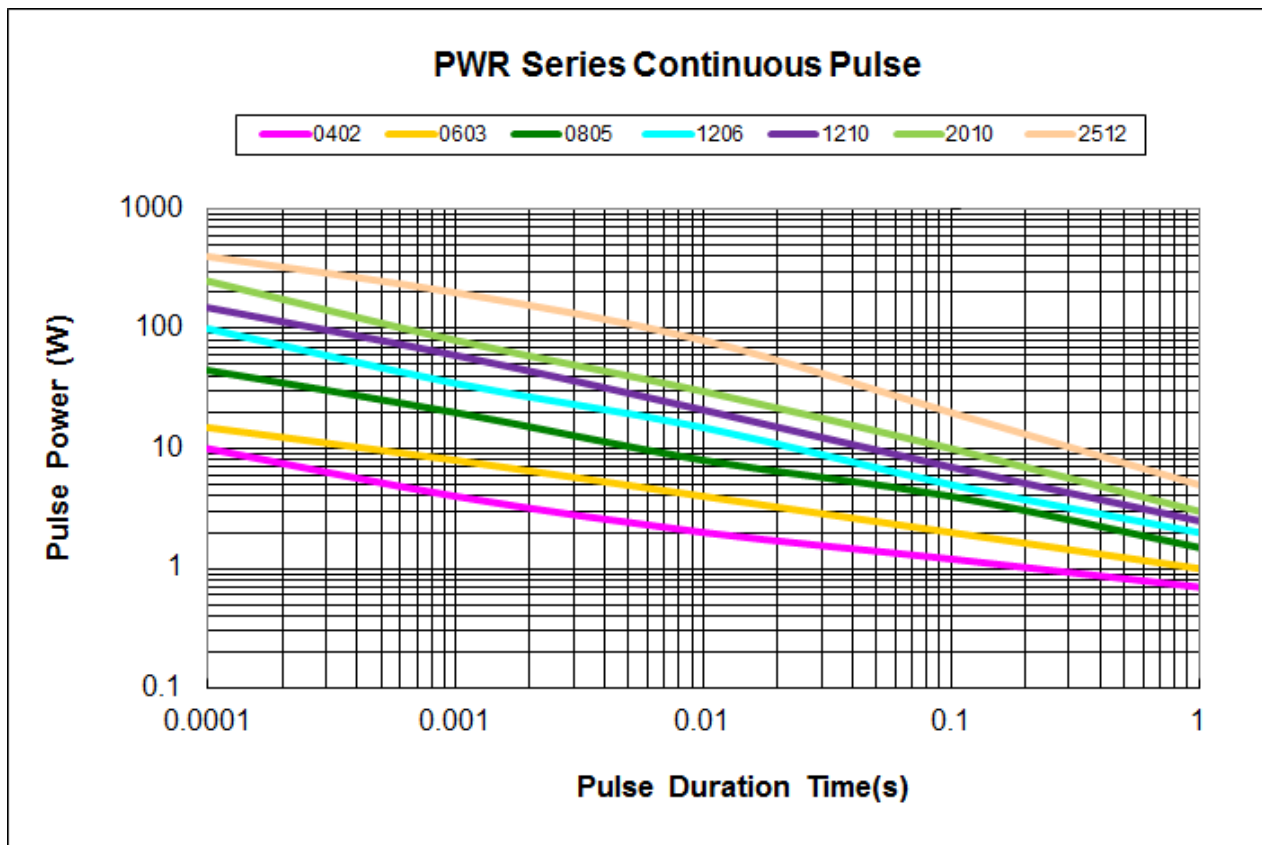

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version A	Mar 10, 2021	-	- New product release
Version A1	Nov 15, 2021	-	- Increase the shelf life description
Version A2	Feb 15, 2022	-	- Derating Curve changes the temperature range
Version A3	Jun 15, 2022	-	- Modify Soldering Condition
Version A4	Jan 31, 2023	-	- Increase 2010 1.25W
Version A5	Jul 06, 2023	-	- Electrical Specifications updated
Version A6	Jul 21, 2023	-	- Increase 0603 1/3W - Increase 1210 1W
Version A7	Oct 02, 2023	-	- Electrical Specifications updated
Version A8	Dec 26, 2023	-	- Electrical Specifications updated
Version A9	Jul 08, 2024	-	- Modify the descriptions in the Features
Version B	Sep 17, 2025	-	- Modify the descriptions in the Features - Modify 0402 Dimensions - Increase 0402 / 1210 / 2010 / 2512 Jumper
Version B1	Dec 01, 2025	-	- Environmental Characteristics updated
Version B2	Jun 29, 2026	-	- Added Low Ohmic Electrical Specifications