

Data Sheet

Customer:

Product: Shielded Molding SMD Power Inductor – SDN Series

Sizes.: 0412/0420/0518/0530/0618/0624/0630/1040

Issued Date: 15-Apr-25

Edition: REV.A3



VIKING TECH CORPORATION
光韻科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw


VIKING TECH CORPORATION KAOHSIUNG BRANCH
光韻科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光韻電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
15-Apr-25	15-Apr-25	15-Apr-25	15-Apr-25	
<i>Mandy Chang</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

Shielded Molding SMD Power Inductor

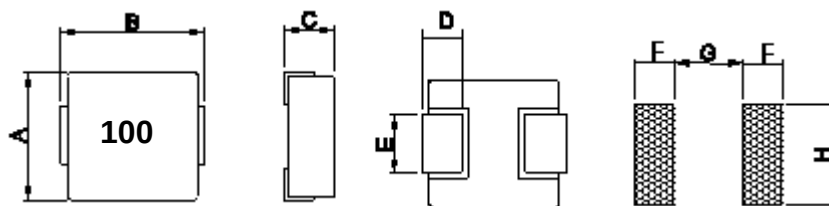

Features

- Halogen free
- Powder iron core material
- Magnetically shielded, low EMI
- High current carrying capacity, Low core losses
- Frequency range up to 5MHz
- RoHS compliant

Applications

- Voltage Regulator Module (VRM)
- Multi-phase Regulators
- Point-of-load Modules
- Smart Phone POL Modules
- SSD Modules
- Notebook Regulators
- Battery Power Systems
- Graphics Cards
- Data Networking And Storage Systems

Characteristics

- Saturation Rated Current would cause inductance to drop approximately 30%
- Temperature Rise Current would cause an approximately ΔT of 40°C
- All test data is referred to 25°C ambient
- The part temperature (ambient + temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Storage Temperature: -10°C ~ 40°C ; Humidity: <75%
- Shelf life: 6 months max

Dimensions

Unit: mm

Type	A	B	C	D	E	F	G	H
SDN0412	4.2±0.25	4.4±0.35	1.0±0.2	0.8±0.3	2.0±0.3	1.5	2.2	2.5
SDN0420	4.2±0.25	4.4±0.35	1.8±0.2	0.8±0.3	2.0±0.3	1.5	2.2	2.5
SDN0518	5.2±0.20	5.4±0.30	1.6±0.2	1.2±0.2	2.2±0.3	1.9	2.2	2.5
SDN0530	5.2±0.20	5.4±0.3	2.8±0.2	1.2±0.2	2.2±0.3	1.9	2.2	2.5
SDN0618	6.6±0.20	7.0±0.3	1.6±0.2	1.6±0.3	3.0±0.3	2.35	3.7	3.5
SDN0624	6.6±0.20	7.0±0.3	2.2±0.2	2.0±0.1	3.0±0.3	2.35	3.7	3.5
SDN0630	6.6±0.20	7.0±0.3	2.8±0.2	1.6±0.3	3.0±0.3	2.35	3.7	3.5
SDN1040	10.0±0.30	11.5 Max	3.8±0.2	2.0±0.5	3.0±0.5	4.1	5.4	4.1

Inductance and rated current ranges

— SDN0412	0.47μH ~ 4.7μH	@Saturation Current: 6.8 ~ 2.8A
— SDN0420	0.22μH ~ 10μH	@Saturation Current: 12.5 ~ 2.2A
— SDN0518	0.47μH ~ 10μH	@Saturation Current: 15.5 ~ 3A
— SDN0530	0.20μH ~ 10μH	@Saturation Current: 14.5 ~ 3.5A
— SDN0618	0.68μH ~ 22μH	@Saturation Current: 17 ~ 2.3A
— SDN0624	0.33μH ~ 10μH	@Saturation Current: 24.5 ~ 4.0A
— SDN0630	0.22μH ~ 33μH	@Saturation Current: 34 ~ 2.5A
— SDN1040	0.15μH ~ 33μH	@Saturation Current: 75 ~ 5.0A

— Test equipment:

L: HP4284A LCR meter

DCR: Milli-ohm meter

— Electrical specifications at 25°C

— Operating temperature rang: -55°C ~ +125°C

Product Identification

SDN	0630	M	T	100
Product Type	Dimensions (AxC)	Inductor Tolerance	Packaging Style	Inductance
	0412: 4.2×1.0 0420: 4.2×1.8 0518: 5.2×1.6 0530: 5.2×2.8 0618: 6.6×1.6 0624: 6.6×2.2 0630: 6.6×2.8 1040: 10.0×3.8	M: ±20%	T: Tape and Reel	R10: 0.10μH 1R0: 1.0μH 100: 10μH

Electrical Characteristics

SDN0412 Type(□:Tolerance):

Part No.	Inductance (μH)	Tolerance	Test Condition	DCR (mΩ) Max.	Saturation Current (A) Typ.	Temperature Rise Current (A) Typ.
SDN0412□TR47	0.47	M	100KHz, 0.25V	21.0	6.8	6.0
SDN0412□T1R0	1.0	M	100KHz, 0.25V	47.0	5.5	4.5
SDN0412□T2R2	2.2	M	100KHz, 0.25V	83.5	3.5	2.75
SDN0412□T4R7	4.7	M	100KHz, 0.25V	195.0	2.8	1.8

SDN0420 Type(□:Tolerance):

Part No.	Inductance (μH)	Tolerance	Test Condition	DCR (mΩ) Max.	Saturation Current (A) Typ.	Temperature Rise Current (A) Typ.
SDN0420□TR22	0.22	M	100KHz, 0.25V	6.6	12.5	9.5
SDN0420□TR47	0.47	M	100KHz, 0.25V	14.0	9.5	7.5
SDN0420□TR68	0.68	M	100KHz, 0.25V	18.0	9.0	7.0
SDN0420□T1R0	1.0	M	100KHz, 0.25V	27.0	7.0	6.0
SDN0420□T1R5	1.5	M	100KHz, 0.25V	46.0	6.0	5.0
SDN0420□T2R2	2.2	M	100KHz, 0.25V	58.0	5.0	4.5
SDN0420□T3R3	3.3	M	100KHz, 0.25V	87.0	4.0	3.3
SDN0420□T4R7	4.7	M	100KHz, 0.25V	105.0	3.0	2.8
SDN0420□T6R8	6.8	M	100KHz, 0.25V	175.0	2.5	2.4
SDN0420□T100	10	M	100KHz, 0.25V	282.0	2.2	1.6

SDN0518 Type(□:Tolerance):

Part No.	Inductance (μH)	Tolerance	Test Condition	DCR (mΩ) Max.	Saturation Current (A) Typ.	Temperature Rise Current (A) Typ.
SDN0518□TR47	0.47	M	100KHz, 0.25V	9.0	15.5	10.5
SDN0518□T1R0	1.0	M	100KHz, 0.25V	17.0	9.0	8.0
SDN0518□T1R5	1.5	M	100KHz, 0.25V	26.0	9.0	7.5
SDN0518□T2R2	2.2	M	100KHz, 0.25V	35.0	6.5	5.0
SDN0518□T3R3	3.3	M	100KHz, 0.25V	58.0	5.0	4.5
SDN0518□T4R7	4.7	M	100KHz, 0.25V	85.0	4.0	3.5
SDN0518□T6R8	6.8	M	100KHz, 0.25V	120.0	3.4	2.8
SDN0518□T100	10	M	100KHz, 0.25V	155.0	3.0	2.5

Electrical Characteristics

SDN0530 Type(□:Tolerance):

Part No.	Inductance (uH)	Tolerance	Test Condition	DCR (mΩ) Max.	Saturation Current (A) Typ.	Temperature Rise Current (A) Typ.
SDN0530□TR20	0.20	M	100KHz, 0.25V	3.9	14.5	14.0
SDN0530□TR47	0.47	M	100KHz, 0.25V	8.5	12.0	11.0
SDN0530□TR68	0.68	M	100KHz, 0.25V	12.0	11.5	9.0
SDN0530□T1R0	1.0	M	100KHz, 0.25V	14.0	11.0	8.5
SDN0530□T1R5	1.5	M	100KHz, 0.25V	25.0	8.5	8.2
SDN0530□T2R2	2.2	M	100KHz, 0.25V	29.0	7.5	7.0
SDN0530□T3R3	3.3	M	100KHz, 0.25V	38.0	6.0	5.5
SDN0530□T4R7	4.7	M	100KHz, 0.25V	60.0	5.0	4.5
SDN0530□T6R8	6.8	M	100KHz, 0.25V	90.0	4.0	3.5
SDN0530□T100	10	M	100KHz, 0.25V	125.0	3.5	3.2

SDN0618 Type(□:Tolerance):

Part No.	Inductance (uH)	Tolerance	Test Condition	DCR (mΩ) Max.	Saturation Current (A) Typ.	Temperature Rise Current (A) Typ.
SDN0618□TR68	0.68	M	100KHz, 0.25V	12.0	17.0	9.5
SDN0618□T1R0	1.0	M	100KHz, 0.25V	16.0	14.0	8.5
SDN0618□T2R2	2.2	M	100KHz, 0.25V	35.0	8.0	7.0
SDN0618□T4R7	4.7	M	100KHz, 0.25V	62.0	5.0	4.0
SDN0618□T6R8	6.8	M	100KHz, 0.25V	110.0	4.5	3.0
SDN0618□T100	10	M	100KHz, 0.25V	155.0	2.5	2.3
SDN0618□T220	22	M	100KHz, 0.25V	350.0	2.3	1.8

SDN0624 Type(□:Tolerance):

Part No.	Inductance (uH)	Tolerance	Test Condition	DCR (mΩ) Max.	Saturation Current (A) Typ.	Temperature Rise Current (A) Typ.
SDN0624□TR33	0.33	M	100KHz, 0.25V	4.1	24.5	18.0
SDN0624□TR47	0.47	M	100KHz, 0.25V	5.1	22.0	15.0
SDN0624□TR56	0.56	M	100KHz, 0.25V	6.5	17.0	13.0
SDN0624□TR68	0.68	M	100KHz, 0.25V	7.0	16.0	12.0
SDN0624□T1R5	1.5	M	100KHz, 0.25V	20.0	15.0	9.0
SDN0624□T3R3	3.3	M	100KHz, 0.25V	39.0	10.0	5.5
SDN0624□T6R8	6.8	M	100KHz, 0.25V	70.0	6.0	4.0
SDN0624□T100	10	M	100KHz, 0.25V	101.0	4.0	3.1

SDN0630 Type(□:Tolerance):


Part No.	Inductance (uH)	Tolerance	Test Condition	DCR (mΩ) Max.	Saturation Current (A) Typ.	Temperature Rise Current (A) Typ.
SDN0630□TR22	0.22	M	100KHz, 0.25V	3.0	34.0	24.0
SDN0630□TR33	0.33	M	100KHz, 0.25V	3.5	25.0	21.0
SDN0630□TR47	0.47	M	100KHz, 0.25V	4.1	20.0	18.0
SDN0630□TR56	0.56	M	100KHz, 0.25V	4.5	18.0	16.5
SDN0630□TR68	0.68	M	100KHz, 0.25V	5.3	17.0	16.0
SDN0630□T1R0	1.0	M	100KHz, 0.25V	7.4	15.0	12.0
SDN0630□T1R5	1.5	M	100KHz, 0.25V	12.1	14.0	12.0
SDN0630□T2R2	2.2	M	100KHz, 0.25V	15.0	10.0	9.5
SDN0630□T3R3	3.3	M	100KHz, 0.25V	22.0	9.5	8.5
SDN0630□T4R7	4.7	M	100KHz, 0.25V	33.0	6.5	6.0
SDN0630□T6R8	6.8	M	100KHz, 0.25V	48.0	6.0	5.0
SDN0630□T100	10	M	100KHz, 0.25V	67.0	5.5	4.5
SDN0630□T150	15	M	100KHz, 0.25V	115.0	4.5	3.0
SDN0630□T220	22	M	100KHz, 0.25V	200.0	3.0	2.3
SDN0630□T330	33	M	100KHz, 0.25V	310.0	2.5	2.0

Electrical Characteristics

SDN1040 Type(□:Tolerance):

Part No.	Inductance (μ H)	Tolerance	Test Condition	DCR (m Ω) Max.	Saturation Current (A) Typ.	Temperature Rise Current (A) Typ.
SDN1040□TR15	0.15	M	100KHz, 0.25V	0.65	75.0	45.0
SDN1040□TR22	0.22	M	100KHz, 0.25V	1.0	60.0	35.0
SDN1040□TR30	0.30	M	100KHz, 0.25V	1.1	50.0	35.0
SDN1040□TR36	0.36	M	100KHz, 0.25V	1.2	50.0	30.0
SDN1040□TR47	0.47	M	100KHz, 0.25V	1.7	40.0	30.0
SDN1040□TR56	0.56	M	100KHz, 0.25V	1.8	33.0	25.0
SDN1040□TR68	0.68	M	100KHz, 0.25V	2.4	30.0	23.0
SDN1040□TR80	0.80	M	100KHz, 0.25V	2.7	29.0	23.0
SDN1040□T1R0	1.0	M	100KHz, 0.25V	3.3	28.0	19.0
SDN1040□T1R5	1.5	M	100KHz, 0.25V	4.2	26.0	16.0
SDN1040□T2R2	2.2	M	100KHz, 0.25V	7.0	18.0	12.0
SDN1040□T3R3	3.3	M	100KHz, 0.25V	11.8	16.0	11.0
SDN1040□T4R7	4.7	M	100KHz, 0.25V	20.0	15.0	9.0
SDN1040□T6R8	6.8	M	100KHz, 0.25V	25.0	12.0	8.5
SDN1040□T8R2	8.2	M	100KHz, 0.25V	27.0	9.0	8.0
SDN1040□T100	10	M	100KHz, 0.25V	30.0	8.5	7.8
SDN1040□T150	15	M	100KHz, 0.25V	45.0	7.0	6.5
SDN1040□T220	22	M	100KHz, 0.25V	66.0	5.5	5.0
SDN1040□T330	33	M	100KHz, 0.25V	92.0	5.0	4.4

■ Tape and Reel specifications

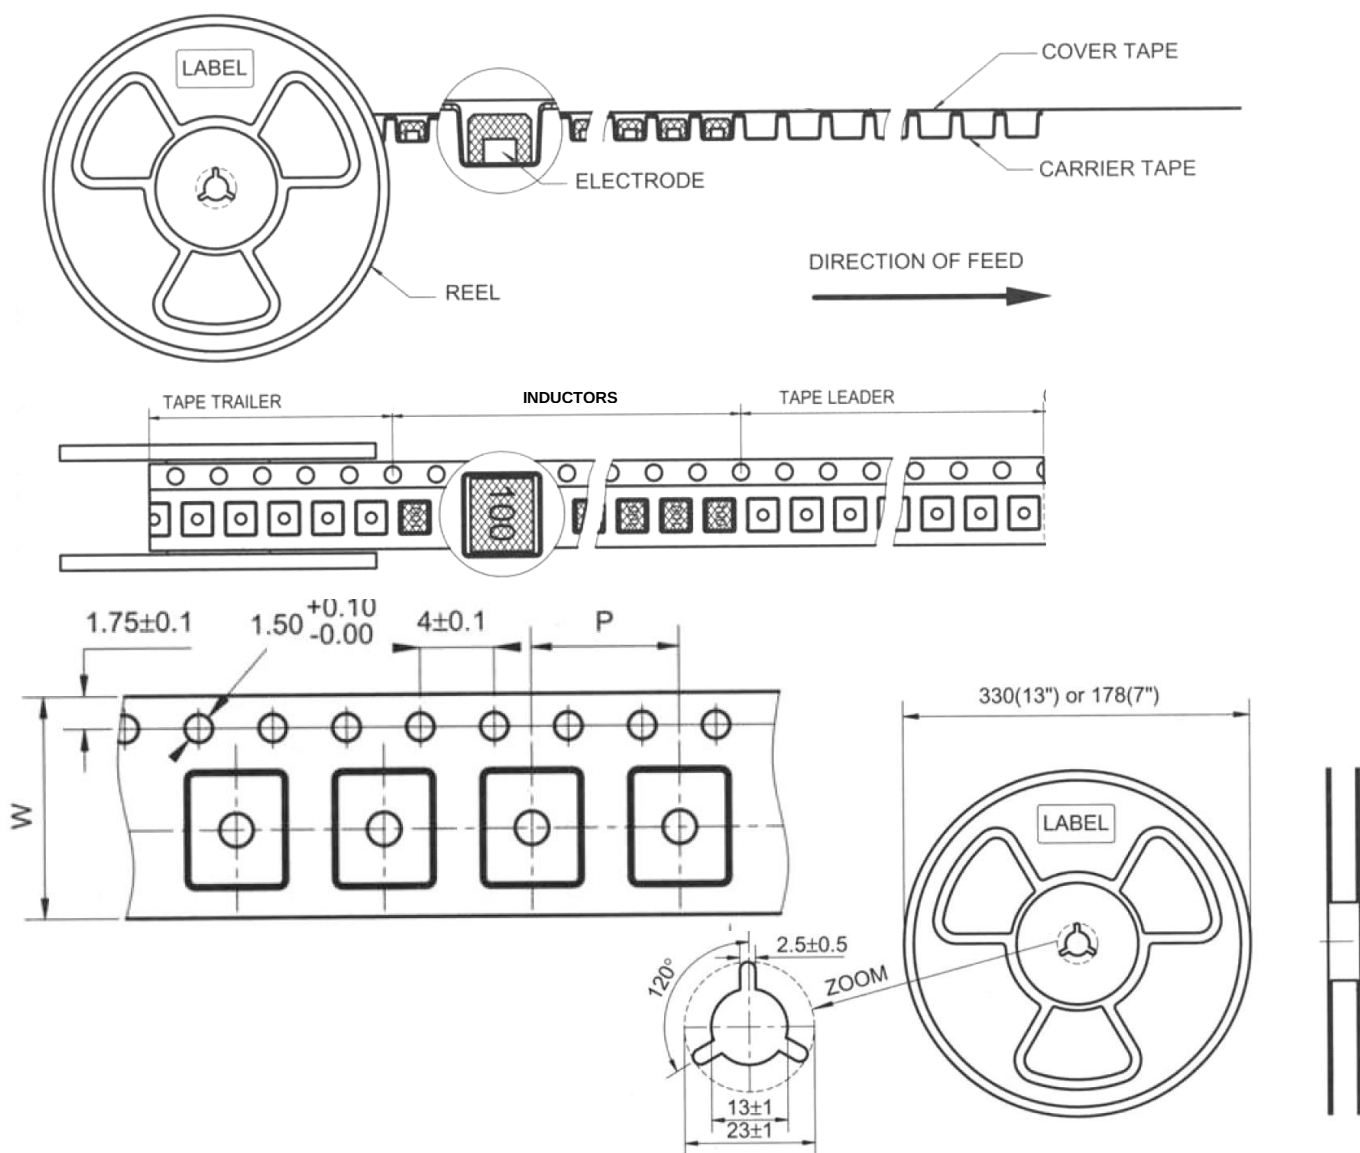

Unit: mm

Type	Tape size		Parts Per Reel
	W	P	13"
SDN0412	12	8	3000
SDN0420	12	8	3000
SDN0518	12	8	2000
SDN0530	12	8	2000
SDN0618	16	12	1500
SDN0624	16	12	1500
SDN0630	16	12	1500
SDN1040	24	16	500

■ General Characteristics

Item	Requirement	Test Method														
Solderability	More than 95% of the terminal electrode should be covered with solder	Solder heat proof: Preheating: 160±10℃ Retention time: 245±5℃ for 2±0.5 seconds														
Solder Heat Resistance	Inductance within±10% of initial value No disconnection or short circuit The appearance shall not break	260±5℃ for 10±1 seconds														
High Temperature Resistance		Temperature: 85±2℃ Applied Current: Rated current Time: 1000+4/-0 hours														
Low Temperature Store		-55±2℃ for 1000+4/-0 hours														
High Temperature Store		125±2℃ for 1000+4/-0 hours														
Thermal Shock		Repeat 100 cycles as follow: <table border="1"> <thead> <tr> <th>Step</th><th>Temperature(℃)</th><th>Time (min.)</th></tr> </thead> <tbody> <tr> <td>1</td><td>-55±2℃</td><td>30±3</td></tr> <tr> <td>2</td><td>Room temperature</td><td>5</td></tr> <tr> <td>3</td><td>125±2℃</td><td>30±3</td></tr> <tr> <td>4</td><td>Room temperature</td><td>5</td></tr> </tbody> </table> Recovery: 48 + 4 / -0 hours of recovery under the standard condition after the test.	Step	Temperature(℃)	Time (min.)	1	-55±2℃	30±3	2	Room temperature	5	3	125±2℃	30±3	4	Room temperature
Step	Temperature(℃)	Time (min.)														
1	-55±2℃	30±3														
2	Room temperature	5														
3	125±2℃	30±3														
4	Room temperature	5														
Humidity Resistance	Inductance within±10% of initial value The appearance shall not break	Temperature: 60±2℃, 90~95% relative humidity Applied Current: Rated current Time: 1000+4/-0 hours														
Vibration Test		Vibration frequency: (10 Hz to 55 Hz to 10Hz) in 60 seconds as a period Vibration time: Period cycled for 2 hours in each of 3 mutual perpendicular directions. Amplitude: 1.5 mm max.														
Shock		Peak value: 100 G Duration of pulse: 11ms times in each positive and negative direction of 3 mutual perpendicular directions														

REVISION HISTORY

REVISION

Version A3

DATE

Apr 15 ,2025

CHANGE NOTIFICATION

DESCRIPTION

-Add Storage conditions and Shelf life.