

Data Sheet

Customer:

Product: TO-263 SMD Power Resistors – STR50 Series

Size: 50W

Issued Date: 04-Jun-25

Edition: REV.A3



VIKING TECH CORPORATION
光頤科技股份有限公司

No.70 Guangfu N. Rd., Hukou
Township, Hsinchu County 303,
Taiwan

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司

No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司

No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028


TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
04-Jun-25	04-Jun-25	04-Jun-25	04-Jun-25	
Mandy Chang	Ben Chang	Ben Chang		

TO-263 SMD Power Resistors – STR50 Series



Construction

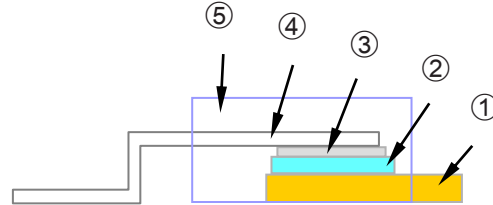

①	Flange	④	Lead
②	Alumina Substrate	⑤	Molding
③	Resistor Layer		

Features


- 50 watts at 25°C case temperature heat sink mounted
- Molded case for protection and easy to mount
- Resistor is electrically isolated from metal tab

Applications


- Switching Power Supplies
- Snubbers Circuits
- Automated Machine Controller
- RF Power Amplifiers
- Low Energy Pulse Loading
- UPS
- Voltage Regulation

Dimensions

Unit: mm

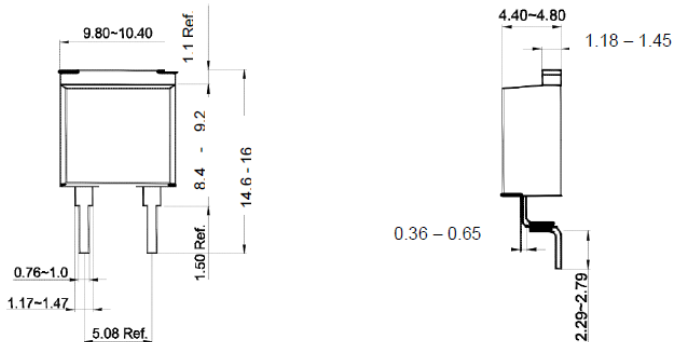


Derating Curve

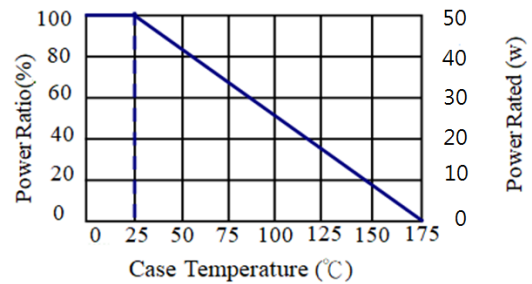

Derating Curve Slope : 0.333W/°K ; Thermal resistance : 3.00°K/W

Recommended Pad Layout

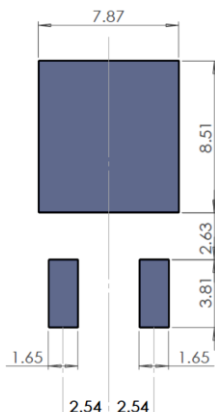

Part Numbering

STR	50	J	D	D	1001
Product Type	Power	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Resistance
	50: 50 Watts	D: ±0.5% F: ±1% J: ±5% K: ±10%	T: Taping Reel D: Tube	D: ±50 E: ±100 F: ±200 G: ±300 - : No Specified (±300~±700)	R100: 0.1Ω 0100: 10Ω 4700: 470Ω 1001: 1KΩ 1002: 10KΩ

Electrical Characteristics Specifications

Item Type	Resistance Range				TCR (PPM/°C)
	±0.5%	±1%	±5%	±10%	
STR50	-	-	0.05Ω - 0.1Ω		No Specified (±300~±700)
	-	≥ 0.1Ω - 1Ω			±300
	-	≥ 1Ω - 5Ω			±100 ±200 ±300
	≥ 5Ω - 10Ω			±100 ±200 ±300	
	≥ 10Ω - 100KΩ			±50 ±100 ±200	

■ Operating Voltage: 350V Max.

■ Dielectric Strength: 1800VAC

■ Insulation Resistance: 10GΩ min.

■ Operating Temperature Range: -65°C to +175°C

Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ΔR taken at +105°C
Short Time Overload	ΔR±0.3%	2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds
Load Life	ΔR±1.0%	2,000 hours at rated power
Damp Heat with Load	ΔR±0.5%	40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	90% min. Coverage	270±5°C for 3 seconds
Temperature Cycling	ΔR±0.3%	-65°C~+150°C, 100 cycles
Terminal Strength	ΔR±0.2%	(Pull Test)2.4N
Vibration, High Frequency	ΔR±0.2%	20g peak

■ Without a Heat Sink, When in Free Air at 25°C, the STR50 is Rated for 2.5W

■ The Case Temperature is to be used for the Definition of the Applied Power Limit

■ The Case Temperature Measurement must be made with a Thermocouple Contacting the Center of the Component mounted on the Designed Heat Sink.


■ Thermal Grease should be Applied Properly.

■ Storage Temperature: 25±5°C; Humidity: <75%RH

■ Shelf life: 1 years Max

■Packaging

Tape and Reel specifications

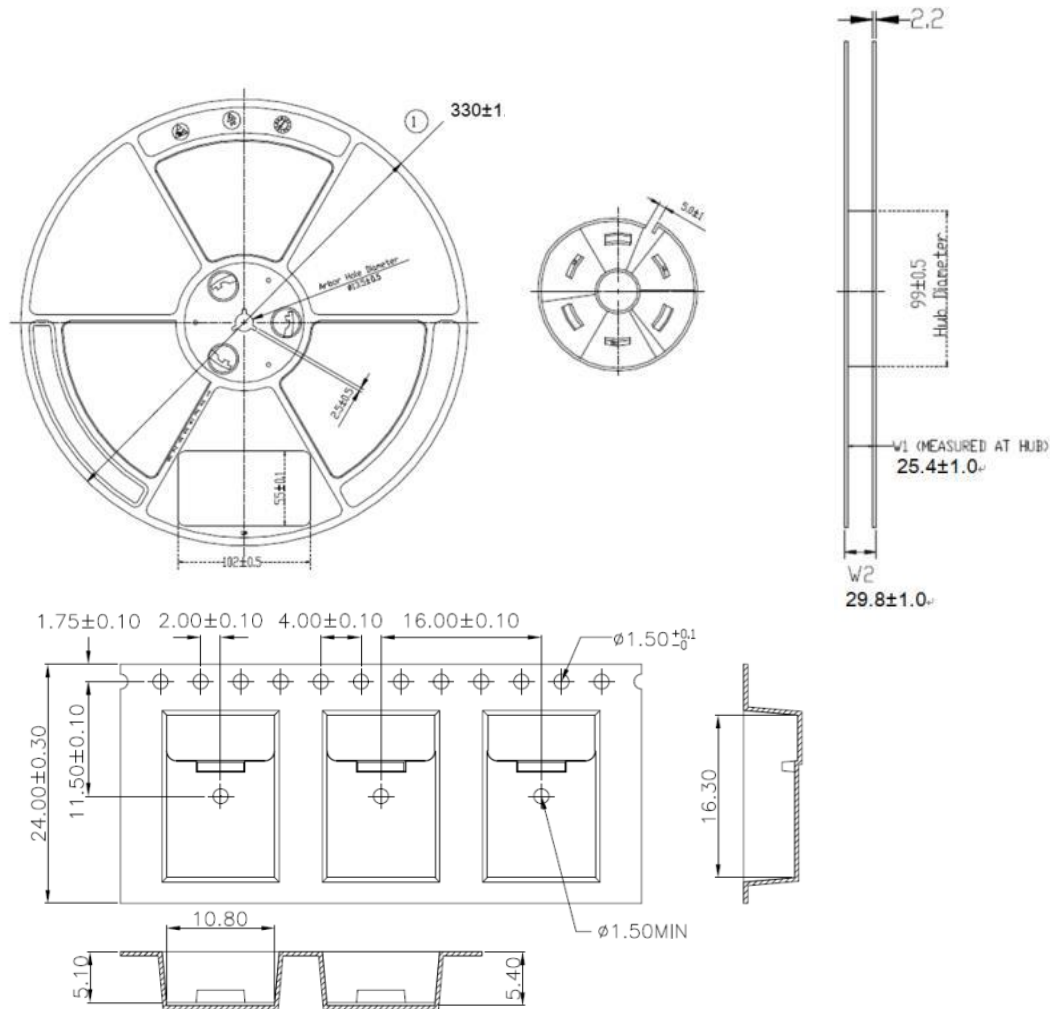


Type	Packaging Quantity
	Reel
STR50	500 pcs


Tube Packaging Quantity

Type	Packaging
	Tube
STR50	50 pcs

Power Curve

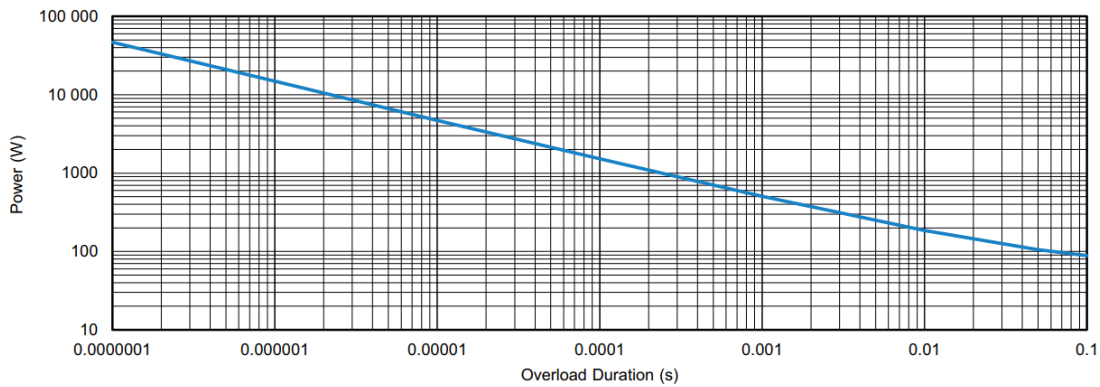

Soldering Profile

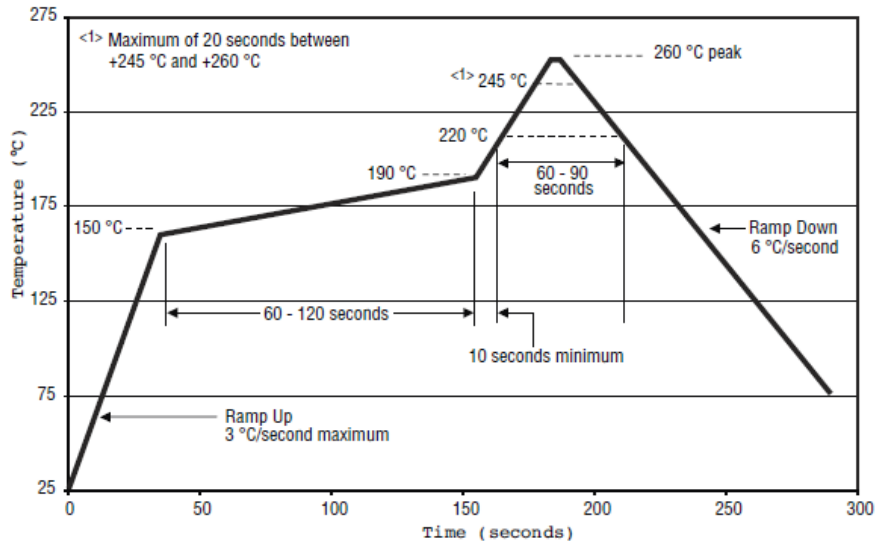

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version A1	Mar 31 ,2025		-Add Shelf life. -Modify the TCR specification for 0.05Ω – 0.1Ω from No Specified to No Specified (±300~±700) -Modify the TCR specification for ≥0.1Ω – 1Ω from No Specified to ±300 -Modify the Derating Curve diagram.
Version A2	May 14 ,2025		-Add the Recommended Pad Layout. -Modify the operating temperature range: -65° C to +150° C → -55° C to +175° C. -Modify the Environmental Characteristics section. -Modify the Packaging Specifications. -Add Power Curve and Soldering Profile.
Version A3	Jun 04 ,2025		-Modify the operating temperature range: -55° C to +175° C → -65° C to +175° C.