

Data Sheet

Customer:

Product: TO-247 Power Resistors – TR100 Series

Sizes.: TR100

Issued Date: 28-Apr-25

Edition: REV.B2



VIKING TECH CORPORATION
光頤科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
28-Apr-25	28-Apr-25	28-Apr-25		
<i>Mandy Chang</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

TO-247 Power Resistors

■ Features


- 100 watts at 25°C case temperature heat sink mounted
- TO-247 style power package
- Single M3 screw mounting to heat sink
- Molded case for protection and easy to mount
- Electrically isolated case
- Non-Inductive design

■ Applications

- Gate Resistors in Power Supplies
- Snubbers
- Load and Dumping Resistors in CRT Monitors
- Terminal Resistance in RF Power Amplifiers
- Voltage Regulation
- Low Energy Pulse Loading
- UPS



■ Construction

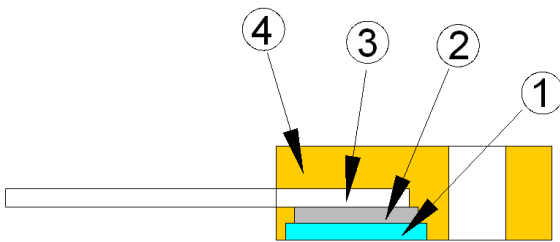



① Alumina Substrate	③ Lead
② Resistor Layer	④ Molding

■ Dimensions

Unit: mm

Type	Weight (g) (1000pcs)	Packaging
		Tube
TR100	3381	35pcs

■ Derating Curve

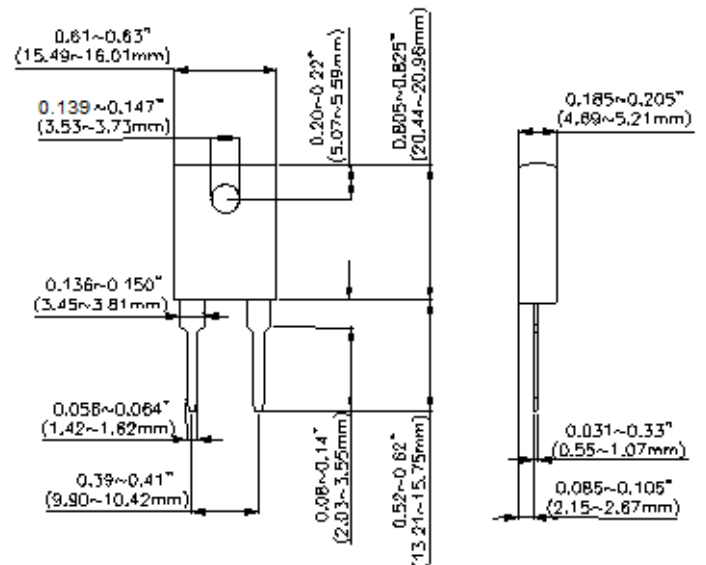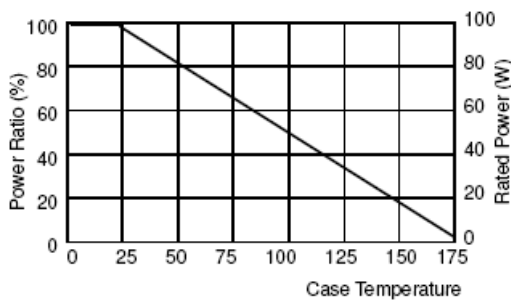

TO-247 Power Resistors

Part Numbering

TR	100	J	D	D	1001
Product Type	Power	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Resistance
	100: 100 Watts	D: ±0.5% F: ±1% J: ±5% K: ±10%	D: Tube	D: ±50 E: ±100 F: ±200 G: ±300 - : No Specified (±300~±700)	R100: 0.1Ω 0100: 10Ω 4700: 470Ω 1001: 1000Ω 1002: 10000Ω

Electrical Characteristics Specifications

Item Type		Resistance Range				TCR (PPM/°C)
		±0.5%	±1%	±5%	±10%	
TR100	-	-	0.05Ω - 0.1Ω		No Specified (±300~±700)	
	-	≥ 0.1Ω - 1Ω			±300	
	-	≥ 1Ω - 5Ω			±100 ±200 ±300	
	≥ 5Ω - 10Ω			±100 ±200 ±300		
	≥ 10Ω - 100KΩ			±50 ±100 ±200		

- Operating Voltage: 700V Max.
- Dielectric Strength: 2500V AC
- Insulation Resistance: 10GΩ min.
- Operating Temperature Range: -55°C to +175°C

Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ΔR taken at +105°C
Load Life	ΔR±1.0%	Rated power, 2,000 hours
Solderability	90% min. coverage	245±5°C for 3 seconds
Momentary Overload	ΔR±0.3%	1.5 times rated power and V (dc) ≤ 1.5VMax. for 5 seconds
Dielectric strength	ΔR±0.15%	1800V AC, 60 seconds
Moisture resistance	ΔR±0.5%	-10°C ~+65°C, RH>90%, cycle 240 hours
Thermal Shock	ΔR±0.3%	-65°C ~150°C, 100 cycles
Terminal Strength	ΔR±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	ΔR±0.2%	20g peak

- Lead Material: Tinned Copper
- Maximum Torque: 0.9 Nm
- When in Free Air at 25°C, the TR100 is Rated for 3.5W
- The Case Temperature is to be used for the Definition of the Applied Power Limit
- The Case Temperature Measurement must be made with a Thermocouple Contacting the Center of the Component mounted on the Designed Heat Sink
- Thermal Grease should be Applied Properly
- Storage Temperature: 25±5°C ;Humidity: < 75%RH
- Shelf life: 1 years Max

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version B1	Mar 31 ,2025		-Add Shelf life.
Version B2	Apr 28 ,2025		-Modify the TCR specification in the Electrical Characteristics Specifications. -Modify the Dielectric Strength. -Modify the Operating Temperature. -Modify the Environmental Characteristics.