

Data Sheet

Customer:

Product: TO-220 Power Resistor – TR50-RF Series

Sizes.: 50W

Issued Date: 14-May-25

Edition: REV.A3



VIKING TECH CORPORATION
光頤科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
14-May-25	14-May-25	14-May-25	14-May-25	
<i>Mandy Chang</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

TO-220 Power Resistor




Features

- 50 watts at 25°C case temperature heat sink mounted
- TO-220 style power package
- Single screw mounting to heat sink
- Molded case for protection and easy to mount
- Electrically isolated case
- Non-Inductive design

Applications


- Switching Power Supplies
- Snubbers Circuits
- Automated Machine Controller
- RF Power Amplifiers
- Low Energy Pulse Loading
- UPS
- Voltage Regulation

Construction

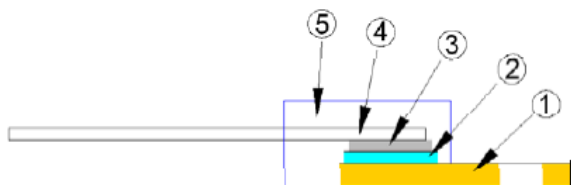


① Radiator Fin	④ Copper Lead
② Alumina Substrate	⑤ Molding
③ Resistor Layer	

Dimensions

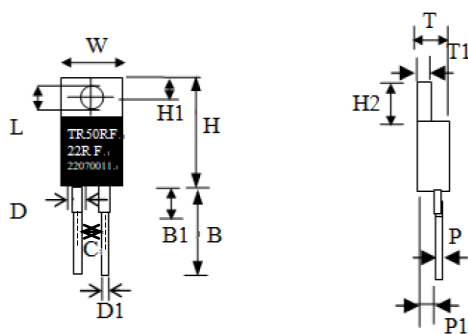

Type	W (mm)	H (mm)	H1 (mm)	B (mm)	B1 (mm)	D (mm)	D1 (mm)	C (mm)	L (mm)	T (mm)	T1 (mm)	H2 (mm)	P (mm)	P1 (mm)	Packing Tube
TR50-RF	10.16 ±0.3	15.00 ±0.5	2.9 ±0.25	13.5 ±0.8	4 max	1.27 ±0.1	0.78 ±0.08	5.08 ±0.25	3.65 ±0.3	4.6 ±0.2	1.2 ±0.1	6.25 ±0.35	0.60 ±0.15	2.3 ±0.25	50pcs

Derating Curve

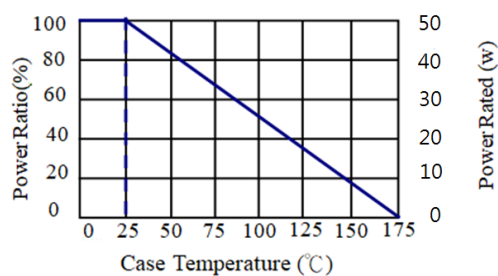

Derating Curve Slope: 0.333W/°K ; Thermal resistance : 3.00°K/W

TO-220 Power Resistor

Part Numbering

TR	50	J	D	D	1001	-RF
Product Type	Power	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Resistance	Code
	50: 50 Watts	D: ±0.5% F: ±1% J: ±5%	D: Tube	D: ±50 E: ±100 F: ±200 G: ±300 - : No Specified (±300~±700)	R100: 0.1Ω 0100: 10Ω 4700: 470Ω 1001: 1000Ω 1002: 10000Ω	RF: Radiator Fin

Electrical Characteristics Specifications

Item Type	Resistance Range				TCR (PPM/°C)
	±0.5%	±1%	±5%	±10%	
TR50-RF	-	-	0.05Ω – 0.1Ω		No Specified (±300~±700)
			≥ 0.1Ω - 1Ω		±300
	-		≥ 1Ω - 5Ω		±100 ±200 ±300
			≥ 5Ω - 10Ω		±100 ±200 ±300
			≥ 10Ω - 100KΩ		±50 ±100 ±200


- Operating Voltage: 350V max.
- Dielectric Strength: 1800VAC
- Insulation Resistance: 10GΩ min.
- Working Temperature Range: -55°C to +175°C

Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ΔR taken at +105°C
Short Time Overload	ΔR±0.3%	2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds
Load Life	ΔR±1.0%	2,000 hours at rated power
Damp Heat with Load	ΔR±0.5%	40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	90% min. coverage	245±5°C for 3 seconds
Thermal Shock	ΔR±0.3%	-65°C~150°C, 100 cycles
Terminal Strength	ΔR±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	ΔR±0.2%	20g peak

- Lead Material: Tinned Copper
- Maximum Torque: 0.9 N-m
- Without a Heat Sink, when in Free Air at 25°C, the TR50-RF is Rated for 2.5W
- The Case Temperature is to be used for the Definition of the Applied Power Limit
- The Case Temperature Measurement must be made with a Thermocouple Contacting the Center of the Component mounted on the Designed Heat Sink.
- Thermal Grease should be Applied Properly
- Storage Temperature: 25°C; Humidity: 25%~80%RH
- Shelf life: 1 years Max

■ Power Curve

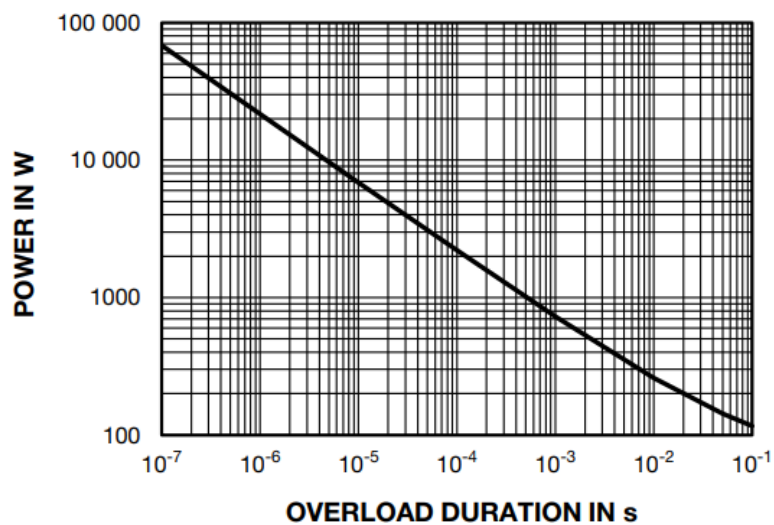

REVISION HISTORY

<u>REVISION</u>	<u>DATE</u>	<u>CHANGE NOTIFICATION</u>	<u>DESCRIPTION</u>
Version A2	Mar 31 ,2025		-Add Storage conditions and Shelf life. -Modify the TCR specification for $0.05\Omega - 0.1\Omega$ from No Specified to No Specified ($\pm 300 - \pm 700$) -Modify the TCR specification for $\geq 0.1\Omega - 1\Omega$ from No Specified to ± 300
Version A3	May 14 ,2025		-Modify the resistance range for TCR No Specified ($\pm 300 - \pm 700$) from $0.05\Omega - 1\Omega \rightarrow 0.05\Omega - 0.1\Omega$. -Modify the dimension L size -Add Power Curve.