

Data Sheet

Customer:

Product: Molding E-Beam Welded Metal Strip Resistor — WMB Series

Sizes.: 4527

Issued Date: 01-Apr-25

Edition: REV.A4



VIKING TECH CORPORATION
光頤科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw


VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
01-Apr-25	01-Apr-25	01-Apr-25	01-Apr-25	
Mandy Chang	Ben Chang	Ben Chang		


Molding E-Beam Welded Metal Strip Resistor

■ Features

- E-beam welded metal strip resistors, pure copper Electrodes are the ideal solution for current sensing applications
- Excellent reliability, stability, Anti-pulse capability
- Special welding process, all-metal construction, Supports low resistance , High temperature resistant resin molded encapsulation, strong weather resistance
- Low thermal EMF(<1 $\mu\text{V}/^\circ\text{C}$)
- Ultra-low parasitic inductance(< 5nH) , fast response, can be used for high frequency AC current detection.
- AEC-Q200 Reliability Testing passed
- RoHS compliant

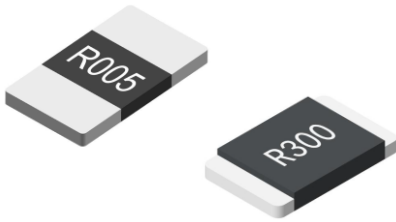

■ Dimensions

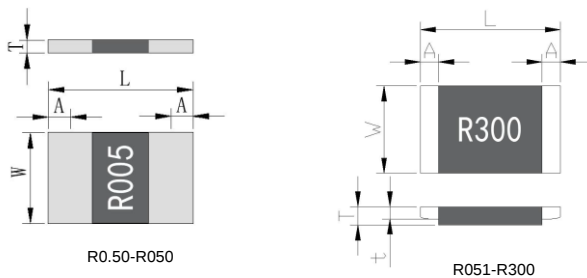


Unit: mm

Type	Size (Inch)	Resistance (m Ω)	Material	L	W	A	T	t
WMB27	4527	0.5	Manganin	11.50 $\pm$ 0.20	7.20 $\pm$ 0.20	4.10 $\pm$ 0.20	1.00 $\pm$ 0.15	-
		1	Manganin			3.50 $\pm$ 0.20		-
		2 - 50	Kamar			3.50 $\pm$ 0.20		-
		51-300	Kamar			1.50 $\pm$ 0.20	1.50 $\pm$ 0.15	1.00 $\pm$ 0.15

■ Part Numbering

WMB	27	F	T	D	I	R050	K
Product Type	Dimensions	Resistance Tolerance	Packaging Code	TCR (PPM/ $^\circ\text{C}$)	Power Rating	Resistance	Material Code
	27: 4527	F: $\pm$ 1% J: $\pm$ 5%	T: Taping Reel	D: $\pm$ 50 K : $\pm$ 150	H: 4W I: 6W	0M50: 0.0005 Ω R002: 0.002 Ω R050: 0.05 Ω R100: 0.1 Ω R300: 0.3 Ω	M: Manganin K: Kamar

■ Derating Curve

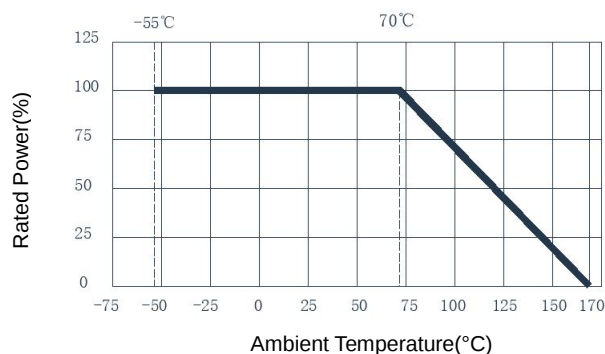

Molding E-Beam Welded Metal Strip Resistor
Standard Electrical Specifications

Type	Power Rating	Material	Resistance Range(mΩ)		TCR (PPM/°C)
			±1%	±5%	
WMB27 (4527)	6W	Manganin	0.5		±150
		Manganin	1.0		±150
		Kamar	2 -50		±50
	4W	Kamar	51 -300		±50

■ Operating Temperature: -55 ~ +170°C

Environmental Characteristics


Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	Within the specified value	IEC60115-1 4.8 Measured value 20°C and +130°C, reference value +20°C
Solderability	No visible damage, weldable area 95% minimum	IEC60115-1 4.17 245°C for 3 seconds
Short time overload	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.13 5 times rated voltage, 5 sec
Resistance to solder heat	No visible damage, ΔR±0.5% maximum	IEC60115-1 4.18 260°C for 10 sec
Bending Strength	Within the specified value	IEC60115-1 4.33 Bending amplitude 2 mm for 60 seconds
Flammability	No ignition of the tissue paper or scorching or the pinewood board	UL-94 V-0 or V-1 are acceptable. Electrical test not required
Insulation Resistance	>1000MΩ	IEC60115-1 4.6 Apply a DC voltage of 100V between the electrode and the substrate, keep it for 60 seconds, and then measure the insulation resistance value
Dielectric Withstand Voltage	No breakdown or arcing	IEC60115-1 4.7 Apply an AC voltage with an effective value of the maximum load voltage between the electrode and the substrate at a speed of about 100V/s, and keep it for 60 seconds
Resistance to solvents	Marking Unsmearred	IEC60115-1 4.29 IPA, 23±5°C, 5±0.5 min
Biased Humidity	No visible damage, ΔR±1.0% maximum	MIL-SRD-202 Method 103 Temperature 85°C, humidity 85% of the conditions applied 10% of the rated power (current) or component limit current (whichever is less), for 1000 hours
High temperature storage	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.25.3 1000 hrs @ 170°C, without load
Low temperature load	No visible damage, ΔR±0.5% maximum	IEC60115-1 4.36 -55°C, No load for 1.5 hour, rated voltage load for 45 min, no load for 15 min
Temperature cycling	No visible damage, ΔR1.0% maximum	IEC60115-1 4.19 -55°C @ 30 min ~ room temperature @ <5 min ~ +155°C @ 30 min, 1000 cycles
Load life	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.25.1 1000 h @ 70±2°C, rated current or component limiting current (whichever is smaller), 90 min on, 30 min off

■ Storage Temperature: 5°C~35°C ; Humidity: 40%~75% RH

■ Shelf life: 1 years Max


■Packaging

Reel Specifications & Packaging Quantity

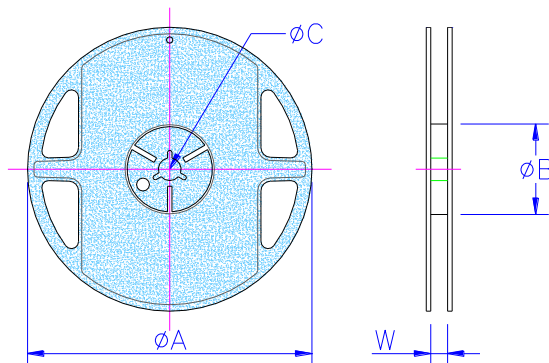


Type	Packaging Quantity	Tape Width	Reel Diameter	ΦA (mm)	ΦB (mm)	ΦC (mm)	W (mm)
WMB27 (R0.50-R050)	Embossed 1K	25mm	7 inch	178.0±2.0	60.0±1.0	13.5±0.5	25.0±0.5
(R051-R300)	Embossed 0.5K						

Embossed Plastic Tape Specifications

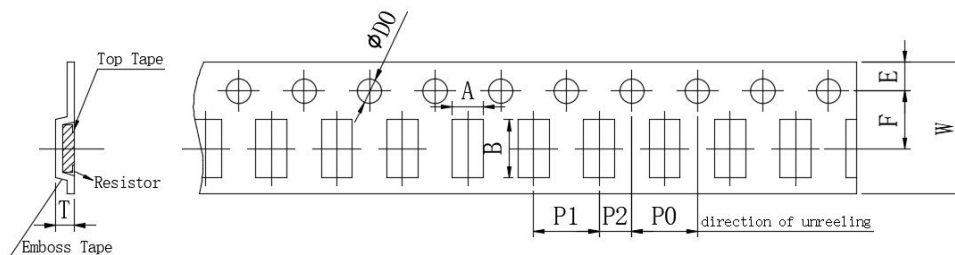

Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P0 (mm)	P1 (mm)	P2 (mm)	ΦD0 (mm)	T (mm)
WMB27 (R0.50-R050)	7.50	11.80	24.00	1.75	11.5	4.00	12.00	2.00	1.50	1.30
(R051-R300)										2.30

■Recommend Land Pattern

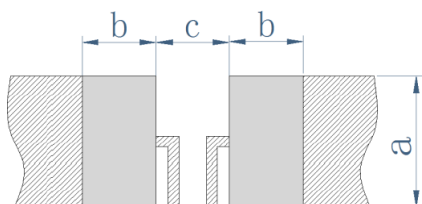

Type	a (mm)	b (mm)	c (mm)
WMB27(R0.50)	8.70	5.20	3.00
WMB27(R001-R050)	8.70	5.00	3.50
WMB27(R051-R300)	8.70	3.00	7.50

REVISION HISTORY

REVISION

Version A4

DATE

Apr 01,2025

CHANGE NOTIFICATION

DESCRIPTION

-Add Storage conditions and Shelf life.