

Data Sheet

Customer:

Product: Four Terminal Molding E-Beam Welded Metal Strip Resistor —
WMK Series

Size.: 3637

Issued Date: 01-Apr-25

Edition: REV.A3



VIKING TECH CORPORATION
光韻科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw


VIKING TECH CORPORATION KAOHSIUNG BRANCH
光韻科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw

VIKING ELECTRONICS (WUXI) CO., LTD.
光韻電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
01-Apr-25	01-Apr-25	01-Apr-25	01-Apr-25	
Mandy Chang	Ben Chang	Ben Chang		


Four Terminal Molding E-Beam Welded Metal Strip Resistor



■ Features

- E-beam welded metal strip resistors, 4-terminal structure, pure copper Electrodes are the ideal solution for current sensing applications
- Excellent reliability, stability, Anti-pulse capability
- Special welding process, all-metal construction, High temperature resistant resin molded encapsulation, strong weather resistance
- Low thermal EMF(<1 $\mu\text{V}/^\circ\text{C}$)
- Ultra-low parasitic inductance(0.5~5nH) , fast response, can be used for high frequency AC current detection.
- AEC-Q200 Reliability Testing passed
- RoHS compliant

■ Dimensions




Unit: mm

Type	Size	Resistance (m Ω)	Material	L	W	T	B	C	A
WMK37	3637	0.2	Manganin	9.10 $\pm$ 0.25	9.40 $\pm$ 0.25	0.80 $\pm$ 0.25	1.60 $\pm$ 0.25	0.82 $\pm$ 0.25	3.50 $\pm$ 0.25
		0.3	Manganin						3.20 $\pm$ 0.25
		1	Manganin						2.40 $\pm$ 0.25
		2 - 30	Kamar						2.40 $\pm$ 0.25
		1 - 30	FeCrAl						2.40 $\pm$ 0.25

■ Part Numbering

WMK	37	F	T	C	D	R001	M
Product Type	Dimensions	Resistance Tolerance	Packaging Code	TCR (PPM/ $^\circ\text{C}$)	Power Rating	Resistance	Material Code
	37: 3637	D: $\pm$ 0.5% F: $\pm$ 1% J: $\pm$ 5%	T: Taping Reel	C: $\pm$ 25 D: $\pm$ 50 W: $\pm$ 75	D: 5W	R001: 0.001 Ω R010: 0.01 Ω	M: Manganin K: Kamar F: FeCrAl

■ Derating Curve

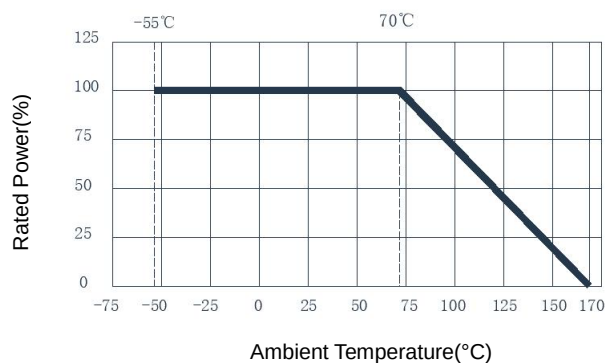

Standard Electrical Specifications

Type	Power Rating	Material	Resistance Range(mΩ)			TCR (PPM/°C)
			±0.5%	±1%	±5%	
WMK37 (3637)	5W	Manganin	0.2, 0.3, 1			±75
		Kamar	2 ~ 30			±25
		FeCrAl	1 ~ 30			±50

Operating Temperature: -55 ~ +170°C

Environmental Characteristics


Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	Within the specified value	IEC60115-1 4.8 Measured value -55°C and +130°C, reference value +20°C
Solderability	No visible damage, weldable area 95% minimum	IEC60115-1 4.17 245°C for 3 seconds
Short time overload	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.13 5 times rated voltage, 5 sec
Resistance to solder heat	No visible damage, ΔR±0.5% maximum	IEC60115-1 4.18 260°C for 10 sec
Bending Strength	Within the specified value	IEC60115-1 4.33 Bending amplitude 2 mm for 60 seconds
Flammability	No ignition of the tissue paper or scorching or the pinewood board	UL-94 V-0 or V-1 are acceptable. Electrical test not required
Insulation Resistance	>1000MΩ	IEC60115-1 4.6 Apply 100VDC for 1 minute
Dielectric Withstand Voltage	No breakdown or arcing	IEC60115-1 4.7 Apply 100VAC for 1 minute
Resistance to solvents	Marking Unsmeared	IEC60115-1 4.29 IPA, 23±5°C, 5±0.5min
High temperature and humidity	No visible damage, ΔR±1.0% maximum	AEC-Q200 Test 7/MIL-STD-202 method 103 temperature 85 °C, humidity 85% of the conditions applied 10% of the rated power (current) or component limit current (whichever is less), for 1000 hours
High temperature storage	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.25.3 1000 hrs @ 170°C, without load
Low temperature load	No visible damage, ΔR±0.5% maximum	IEC60115-1 4.36 -55°C, No load for 1.5 hour, rated voltage load for 45 min, no load for 15 min
Temperature cycling	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.19 -55°C @ 30 min ~ room temperature @ <5 min ~ +155°C @ 30 min, 1000 cycles
Load life	No visible damage, ΔR±1.0% maximum	IEC60115-1 4.25.1 1000 h @ 70±2°C, rated current or component limit current (whichever is less), 90 min on, 30 min off

Storage Temperature: 5°C~35°C ; Humidity: 40%~75% RH

Shelf life: 1 years Max


Packaging

Reel Specifications & Packaging Quantity

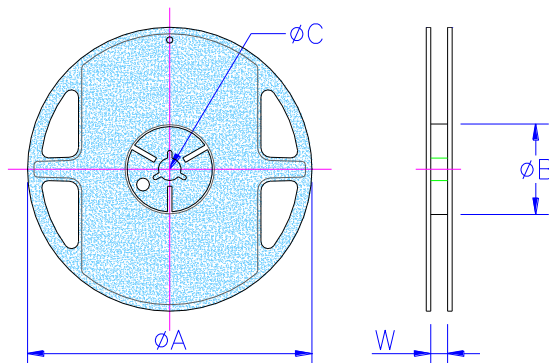


Type	Packaging Quantity		Tape Width	Reel Diameter	ΦA (mm)	ΦB (mm)	ΦC (mm)	W (mm)
WMK37	Embossed	4K	16mm	13 inch	330.0 $\pm$ 2.0	99.0 $\pm$ 1.0	13.5 $\pm$ 0.5	16.3 $\pm$ 0.5

Embossed Plastic Tape Specifications

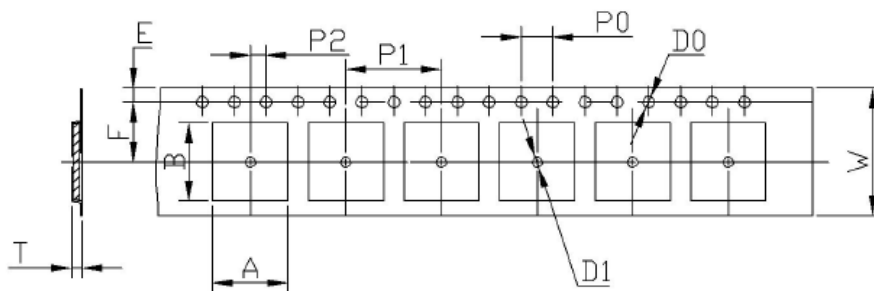

Type	A (mm)	B (mm)	W (mm)	E (mm)	F (mm)	P0 (mm)	P1 (mm)	P2 (mm)	$\Phi D0$ (mm)	T (mm)
WMK37	9.4	9.8	16	1.75	7.5	4	12	2	1.5	1.3

Recommend Land Pattern



Type	Resistance (m Ω)	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)
WMK37	0.2 - 0.3	9.9	4.2	1.8	1.8	0.6
	1 - 30	9.9	3.2	4.0	1.8	0.6

REVISION HISTORY**REVISION**

Version A3

DATE

Apr 01,2025

CHANGE NOTIFICATION**DESCRIPTION**

-Add Storage conditions and Shelf life.